



## MSB TECHNOLOGY Select DAC User Guide

[Home](#) » [MSB TECHNOLOGY](#) » MSB TECHNOLOGY Select DAC User Guide 



The Select DAC  
User Guide

### Contents

- [1 Technical specifications](#)
- [2 The MSB Remote](#)
- [3 Documents / Resources](#)
- [4 Related Posts](#)

**Technical specifications**


Supported Formats (Input dependent)	44.1kHz to 3,072kHz PCM up to 32 bits 1xDSD, 2xDSD, 4xDSD, 8xDSD Supports DSD via DoP on all inputs
Digital Inputs	4x Advanced isolated input module slots
XLR Analog Inputs	100K Ohm Balanced 12Vrms Maximum Isolated when not selected
XLR Analog Outputs	3.57Vrms Maximum (Digital Input) 12Vrms Maximum (Analog Input) 75 Ohm Balanced Galvanically isolated
Volume Control	Purely passive constant impedance analog attenuation 1dB steps
Display	Custom discrete LED audio clock synchronous display Adjustable brightness and auto-off feature
Controls	Isolated RS-232 IR Remote Knob + 4 Buttons
Chassis Dimensions	Width: 17.5 in (444 mm) Depth: 17.5 in (444 mm) Height without feet: 3 in (79 mm) Stack height: 3.625 in (92 mm) Weight: 25.5 lbs (11 kg) Product Feet: M6X1 Thread
Shipping Dimensions	Width: 25 in (635 mm) Depth: 25 in (625 mm) Height: 10 in (254 mm) Weight: 55 lbs (24 kg)
Included Accessories	User Manual MSB Remote Micro USB Charging Cable 4X Rubber Feet 4x Plastic inserts for feet

### Setup and Quick Start

The interface is quite simple with few user controls. Input source defaults on to auto-switching. The display will let you know if you have active input. On power-up, the volume is reset to the programmed startup level. Shipping default is 70. Turn the volume knob up until you hear music.

Power	<p>The DAC comes with two high-performance powerbases. The powerbases automatically detect and switch between 240V and 120V. This is not a switching supply that works at any voltage, but a linear supply with automatic switching of the transformer leads. The power supplies are switched on and off with a button on the front or via the IR remote. Plug in the provided AC cable to the back of each power base, then plug in the provided DC interconnects from each of the plugs on each of the powerbases to each of the two plugs on each side of the DAC. To unplug the DC power cables, just pull on the barrel of the connector housing (DO NOT TWIST OR DISASSEMBLE THE CONNECTOR).</p>
Inputs	<p>The DAC comes with the digital input modules of your choice. Connect any digital input to any active digital audio source. The frequency and bit depth of the incoming signal will be displayed on the front panel.</p>
Outputs	<p>Connect the balanced analog outputs to any amplifier. The output level is controlled with the knob or remote.</p>

When stacking the units, you will find enclosed black plastic square inserts. These inserts fit into the square holes in the top of each chassis. This will allow you to stack the units without scratching the chassis.

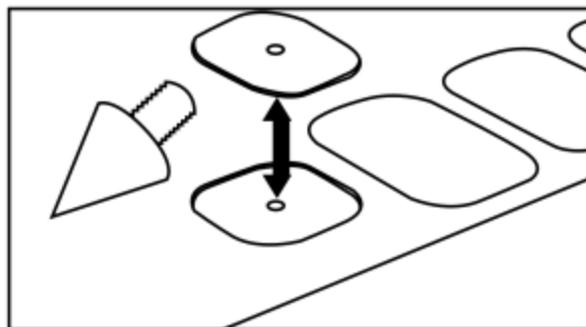


### **Burn-In**

The feedback we receive leads us to recommend at least 100 hours of burn-in on this DAC. Customers generally report improvement up to one month.

### User Interface

Menu Button	The square button is a single purpose. It will enter the setup mode at the top of the menu tree. If in the setup, and it doesn't matter where this button will exit the setup and return to the normal operational mode.
Input Selection	The right and left arrows switch inputs. The 'Auto' mode will be in the list of inputs. The right and left arrows switch inputs. If 'Auto' is selected, the unit will automatically switch inputs based on priority (Input slot B is higher than Input slot A) with the analog input being the lowest priority. When a source with a higher priority becomes active, the unit will automatically switch to the new higher priority input. Toggling through the inputs manually will defeat any auto-switching. When in the setup menu the arrows move right and left through the menu structure.
Mute	The circle button can be used to quickly mute the audio of the DAC.
Volume Knob	This knob adjusts the volume between 0 and 106.
Display	The display shows the Input, sample rate, bit depth, and volume.

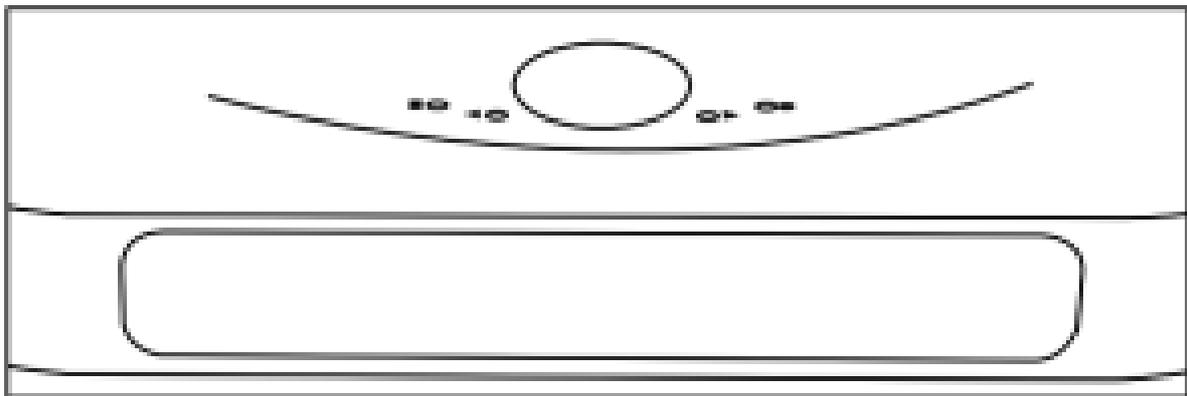

### About the 4 input module slots

The DAC has four input module slots. They are labeled A through D. There are two classes of input modules, analog and digital. Analog modules must be placed adjacent to the analog output module. They can be either be additional analog inputs or a second analog output module. Digital modules can be placed in any position. Each module is completely self-contained. It is recognized by the DAC and identified on the display. When the module is not in use it is disabled.

### Available Digital Input Module

ProI2S	MSB's proprietary interface for use with MSB transports. This module provides two inputs.
XLR S/PDIF	A single XLR digital input with a word sync output.
Optical/Coaxial S/PDIF	A Toslink and Coaxial digital input with a word sync output.
MQA USB	A single USB interface for playback via a computer-based device. This module provides support for MQA decoding. (See USB manual for operation and setup details)
Renderer	A renderer interfaces for use on a home network or server. (See Renderer manual for operation and setup details)
Pro ISL	MSB proprietary interface for use with MSB transports. This module provides one input.

## Available Preamps

The DAC is available with one output module, but a specialized inline XLR to RCA adaptor can be ordered.

Balanced Preamp	Offers one set of balanced analog inputs and outputs. Provides volume control with our passive constant impedance volume control technology.
Single-Ended Adapter	For Single-Ended operation of the product, it is necessary to buy the XLR to RCA adapters. These adapters allow for the highest level of quality to be achieved for your DAC by moving the conversion components as far as the crucial and sensitive preamp components of your Preamp module.

## Additional Analog Inputs and Outputs

In addition to the primary output module, additional analog inputs and a second analog output can be added.

Isolated Analog Output	Provides a second analog output as single-ended or balanced.  Only one analog output module can be added per DAC.
Isolated Sub Analog Output	Provides an isolated sub-woofer output as single-ended or balanced. Only one can be added per DAC.
Additional Analog Input	Provides an extra analog input connection as single-ended or balanced. Multiple inputs can be installed.

## Removing and Installing Modules

Removal and installation of modules is a completely tool free process that is easily performed at the back of the unit. Under the lower lip of each module is a lever arm. Simply pull the lever out and away until it is perpendicular with the back of the unit. Then gently, but firmly, pull the module lip and lever until the module releases and slide it out of the unit.

Analog output and analog input modules must be installed in a special fashion. When installing any analog output or analog input module, you must remove the preamp output module and attach the analog output or analog input module into the side connector of the larger preamp module and then slide the connected pair into the back of the unit as one while making sure both levers are out and tightened at the same time.

## Module Handling

It is important that you refrain from touching the circuit board or rear connector of any input or output module when removing or installing any input or output module from your DAC. When handling these modules it is important that you only contact the metal case of the module or the front edge of the module where the cam arm is located. Improper handling of your modules can result in static shock and damage to the module or DAC.

## The Heart of the System – Preamp and DAC

This product is a unique combination of a very high-performance DAC and the ultimate passive preamp. For the best possible sound in your system, it should be connected directly to your audio amplifiers. Our preamp philosophy is based on the belief that from the moment analog audio is created, every transition that is made degrades the sound quality. This is why we offer a passive preamp within the DAC, to achieve the simplest, shortest possible signal path, with the least possible degradation of the true music. The DAC's modular design is very flexible with the option for one or more analog inputs, and many digital inputs. It is designed to be the last component in your system before the amplifiers and replaces the need for a traditional preamp. The analog input can be enabled in the menu and can be set to volume control the analog input or bypass the analog input if you

want to use another volume control for your analog source.

### **Loading new firmware**


Always be certain that you are updated with the current firmware by checking our website. The DACs' firmware is always updated using a .WAV file. If you experience issues with playback of the update file, be sure to check for bit-perfect playback in your system. All firmware updates can be found at: [www.msbtechnology.com/Support](http://www.msbtechnology.com/Support)

### **Bit-Perfect Source Testing**

The following files can be downloaded from the MSB website to verify bit-perfect playback on any transport: They are .WAV test files that when played, will be identified by the DAC and checked, and will be reported on the display if they are bit-perfect. If there is a problem with the test, it will play but the display will not indicate any change. Be sure upsampling is turned off in any transport as this prevents a file from remaining bit-perfect. This system will allow you to easily test your source, especially computer sources, to see if all your settings are correct. There are files at all sample rates for both 16 bit and 24-bit operations.

### **The MSB Remote**

1	Indicator LED	<p><b>While in use:</b></p> <p><b>White</b> – Command Sent</p> <p><b>Red and White</b> – Command Sent and Low Battery</p> <p><b>Red Flashing</b> – Needs Charging</p> <p><b>While charging:</b></p> <p><b>Red</b> – Charging</p> <p><b>White</b> – Fully Charged</p>
1	Power	Powerbase on and off. When the powerbase is linked to an amplifier or MS B product, this button will turn off the entire system (See powerbase manual for details)
3	Input	Toggles directly through DAC inputs
4	Action 1	Toggles phase invert
5	Action 2	Toggles video mode
6	DAC Menu	<p>Enter DAC menu</p> <p><b>While in menu:</b></p> <p><b>Up</b> – Volume Up <b>Down</b> – Volume Down <b>Enter</b> – Mute</p> <p><b>Return</b> – DAC Menu</p>
7	Volume	The center scroll wheel controls DAC volume
8	Mute	DAC mute
9	Track Backward	Skip/scan backward ( <i>MSB Transport Only</i> )
10	Play/Pause	Play and pause ( <i>MSB Transport Only</i> )
11	Track Forward	Skip/scan forward ( <i>MSB Transport Only</i> )
12	Eject	Eject media disc ( <i>MSB Transport Only</i> )
13	Stop	Stop media ( <i>MSB Transport Only</i> )
14	Track Repeat	Track or album repeat ( <i>MSB Transport Only</i> )
15	Charging Port	Micro-USB to charge the remote battery

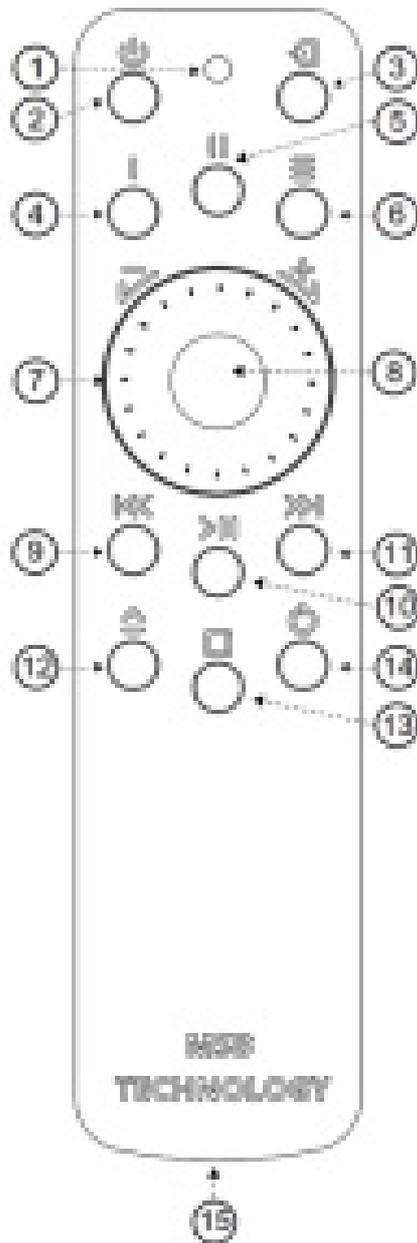

**Saving Menu and Startup Settings**

When changing settings in the menu, use the enter button in the center of your volume wheel on the remote or the circle on the DAC faceplate to confirm settings in the DAC menu. After you have made your changes in the DAC menu, use the menu button to exit the DAC menu completely to save the changes you have made in the DAC menu.

The DAC will not save any of your settings until you exit the menu. The “Action Buttons” on your remote change certain settings on your DAC without navigating the DAC menu (Phase Invert and Video Mode). However, these settings reset every time the DAC is reset or powered off. If you would like these settings to persist through resets or power-offs, you simply have to choose the action button setting that you wish to be the default and then enter and exit the DAC menu by double-clicking the Menu button on your remote or DAC faceplate. If at any point the DAC seems to be improperly set up or you want to start fresh with your settings and functions, there is a “Reset” option

near the end of the DAC menu. Simply select this and confirm “YES” before closing the DAC menu and restarting the unit.

**Setup Menu Options**

Display brightness	This can be adjusted from 1 – 10
Display	<p><b>On</b> (Default)</p> <ul style="list-style-type: none"> <li>• The display is on continuously.</li> </ul> <p><b>Auto-off</b></p> <ul style="list-style-type: none"> <li>• The display is off but will turn on momentarily when the volume or input changes.</li> </ul>
DSD mode	<p><b>Optimized</b></p> <ul style="list-style-type: none"> <li>• The optimized model is the DSD decimation done using a special method developed by MSB.</li> </ul> <p><b>Native DSD</b> (Default)</p> <ul style="list-style-type: none"> <li>• The Native DSD signal is sent unprocessed direct to the Hybrid DAC modules.</li> </ul>
Startup volume	<p><b>0 – 100</b></p> <ul style="list-style-type: none"> <li>• This is the default volume the DAC will power up at.</li> </ul> <p><b>Volume Disabled</b></p> <ul style="list-style-type: none"> <li>• If you choose to use the DAC with an external preamp, you can set turn the volume control off.</li> </ul>

### Setup Menu Continued...

Input switching	<p><b>Manual with smart</b></p> <p>Only allows manual switching between active and previously active inputs. The 'Auto' mode is not available. <b>Auto with smart</b> (Default) Allows manual and auto-switching between active and previously active inputs.</p> <p><b>Auto with all inputs</b></p> <p>Allows manual and auto-switching between all installed inputs.</p>
Restore DAC settings	<p><b>Confirm</b></p> <ul style="list-style-type: none"> <li>• This restores the DAC to default settings.</li> </ul>

Renderer Power	<p><b>Auto (default)</b> The renderer is powered off if no connection is found</p> <p><b>Off</b> Renderer always off</p> <p><b>On</b> Renderer always on</p>
Renderer Remote	<p><b>Enable</b> The transport buttons on the remote work to control renderer functionality</p> <p><b>Disable</b> The transport buttons on the remote only work for the transport</p>
Analog	<p><b>Off (Default)</b> Disables the analog input.</p> <p><b>On-Volume Controlled</b> Enables the analog input and uses the volume control.</p> <p><b>On-Volume Bypass</b> Enables the analog input and bypasses the volume control.</p>
About screen	This screen displays the serial number, year of manufacture, and distributor name of the DAC.
DAC Software	This screen displays the current revision # of firmware installed in the DAC.
Input A – D	Lists the installed input module in slot A, B, C, and D.
Output	Displays the current output module installed and the output impedance.

### Select Powerbases

Both powerbases contain isolation technology. The powerbases detect the input voltage and switch to 120 volt or 240-volt operation. They are also available in a fixed 100-volt configuration. All powerbases have over-voltage protection. Two fuses are provided in each powerbase: – 5A 250V SLO BLO – 5 mm x 20 mm miniature fuse (This is the main fuse). – 100mA 250V SLO BLO – 5 mm x 20 mm miniature fuse (This is for the standby supply only).

AC Voltage	120/240V (Auto switching) Optional 100V fixed configuration
Power Consumption	100 Watts with fully configured Select DAC Less than 2W standby
Chassis Dimensions	Width: 17.5 in (444 mm) Depth: 17.5 in (444 mm) Height without feet: 3 in (79 mm) Stack height: 3.625 in (92 mm) Weight: 4 5.8 lbs (20 kg)
Shipping Dimensions	Width: 25 in (635 mm) Depth: 25 in (625 mm) Height: 10 in (254 mm) Weight: 65 lbs (29 kg)
Included Accessories	2X Power Cables Ground Cable IEC Power Cord 4X Rubber Feet M6X1 Thread

### Select Powerbase Setup


After plugging in the power base, connect both powerbases with the supplied 3.5mm mini-jack cable by plugging it into the 12-volt remote trigger connections. Be sure to check that the primary power base 'function switch' is set to the 'NORMAL' position. The secondary powerbase switch set to 'LINKED'. This allows the primary power base to control the second one without them having to be turned on/off separately.

### Powerbase Controls

There is one button on the front of the power base as well as two control features just under the front of the powerbase on the bottom.

LED indications	<p><b>White</b> – Power on.</p> <p><b>Red</b> – Power off.</p> <p><b>Amber</b> – Linked mode, 12-volt trigger controlled.</p> <p><b>Flashing Amber</b> – Over-voltage protection.</p>
Display brightness	This is a rolling wheel to control the brightness of the power indication light
Power control	<p><b>Normal</b> – This sets the powerbase as the 12-volt trigger master.</p> <p><b>Linked</b> – This sets the powerbase as the 12-volt trigger slave.</p> <p>The ‘master’ powerbase will control this unit.</p>


### Front of Powerbase

	LED Indicator
	Power Button
	IR Sensor
<div style="display: flex; justify-content: space-between; align-items: center;"> <div style="text-align: center;">  <p>Darker Brighter</p> </div> <div style="text-align: center;"> <p>Power Control</p>  </div> <div style="text-align: center;"> <p>Normal Linked</p>  <p>Display Brightness</p> </div> </div>	

### Powerbase – 12 Volt Remote Trigger

This powerbase is equipped with a remote trigger for use with other MSB products. The trigger uses a 3 pin mini jack. When any MSB product is turned off, the other products connected will also turn off and vice-versa. This

trigger can also be used with other products. Products may use this trigger differently, so you may need to rewire a cable or use an interface relay. The connector is wired as shown. If you connect “signal” to “ground”, all MSB products will turn off. If you connect “signal” to “12 V” or leave it open, all MSB products will turn on.

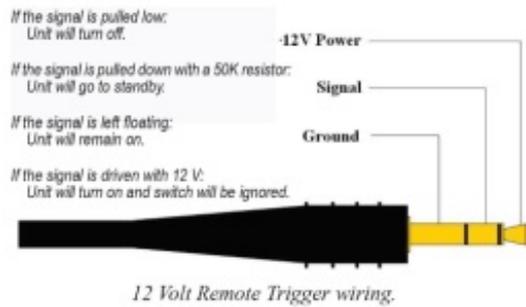


### Ground Jumper IN – Basic Operation


The Basic Operation provides isolation only for the DAC. This gets you half the protection available. Be sure the jumper is in place between the Chassis Ground and Amplifier Ground. This is the shipping configuration. **NEVER OPERATE WITHOUT THE JUMPER OR A GROUND WIRE IS ATTACHED.**

### Ground Jumper OUT – Enhanced Operation

The Enhanced Operation provides isolation for both the DAC and the amplifier. This gets you the full isolation available. In this configuration, you will lift the Grounding lug jumper on both powerbases and then make a connection between the “Amp Ground” lug on both the powerbases. It is important that both grounding lug jumpers are disconnected on each of your powerbases to ensure proper ground isolation. With the jumpers disconnected, connect the supplied ground wire from the AMPLIFIER GROUND lug of ONE powerbase to the chassis of ONE of your mono-block amplifiers or to your single stereo amplifier. Note this connection is dependent on the amplifier so you will have to look for the best place to attach the wire. Generally, the easiest place would be to loosen a screw on the Amplifier Chassis and slip the open Spade lug under the screw head and tighten the screw. The only other place a true ground may be found is on the ground pin of the power connector to the AMP but this will not be easy to connect to.

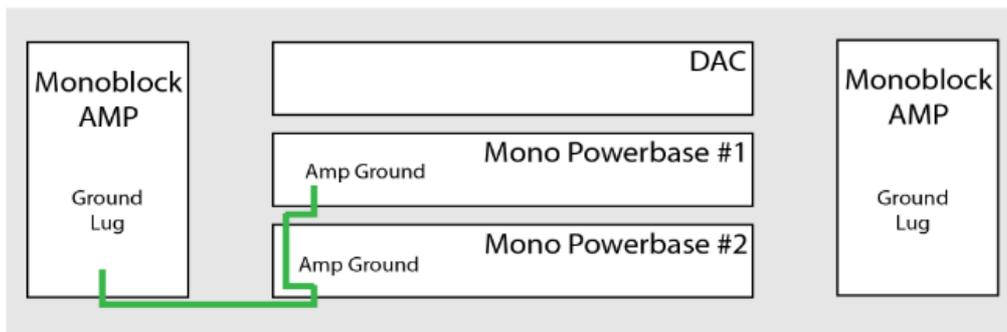

### Grounding Lug Configuration

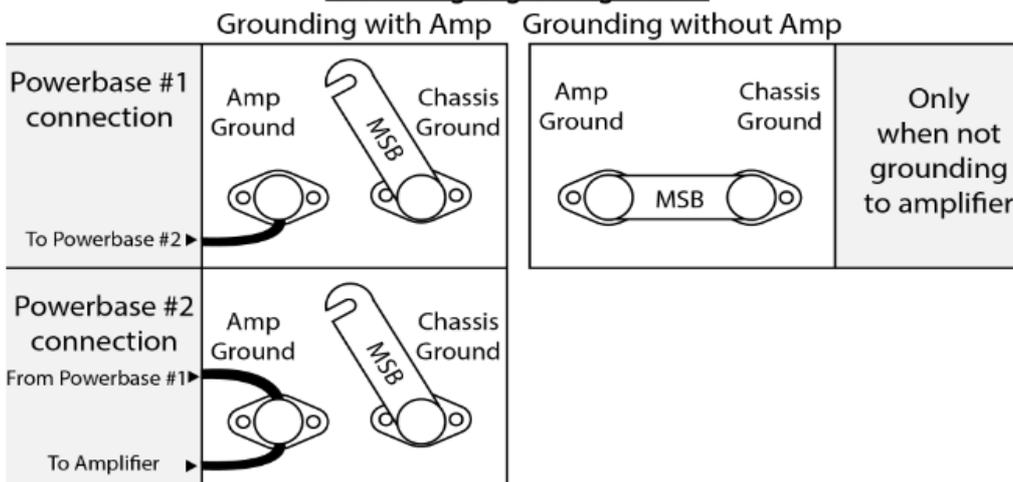

## Powerbase Connection

Attach the ground wire to the “Amp Ground” lug of both powerbases. Lift the jumpers between “Amp Ground” and “Chassis Ground” as shown above

## Amp Connection

Attach the ground wire to the Ground Lug on the jack panel of the MSB amp. If there is no ground lug, attach wire to a chassis screw. \*\*\*Never connect the ground wire to the negative speaker terminal\*\*

## Technical Support

If you are experiencing any issues with your MSB product, please contact your nearest dealer or try our support page at [www.MSBtechnology.com/support](http://www.MSBtechnology.com/support). Please be sure you have the most current edition of your product’s firmware installed. If your issue persists please feel free to contact MSB directly. Emails are usually responded to in 24 – 48 hours.

Email: [techsupport@msbtechnology.com](mailto:techsupport@msbtechnology.com)

### MSB Return Procedure (RMA)

If a customer, dealer, or distributor has a problem with an MSB product, they should email tech support before sending anything back to the factory. MSB will do their best to respond within 24 hours. Should it be clear that a product must be returned, tech support should be informed and all the following relevant information should be provided:

1	Product in question
2	Serial number
3	Exact configuration when symptom is observed along with a list with the input used, source material, system connections, and amplifier
4	Customer name
5	Customer shipping address
6	Customer phone number and email
7	Special return shipping instructions

MSB will issue an RMA number and create an invoice with all details outlined except the final price as the product has not yet been seen. This invoice will be emailed so all the above information can be checked and verified by the customer. The product should be returned with the RMA number present on the box. Work can then begin immediately and the product can be sent back quickly. Any repair that is difficult and cannot be completed in two weeks will be identified and the customer will be informed when it is to be expected. Otherwise the majority of repairs should be shipped back within two weeks if all the required information is present on the invoice.

### Link to page:

<http://www.msbtechnology.com/faq/msb-product-return-procedure/>

## The Select DAC Limited Warranty

### Warranty includes:

- MSB warrants the unit against defects in materials and workmanship for a period of 10 years from the date the unit was originally shipped from MSB.
- This warranty covers parts and labor only, it does not cover shipping charges or tax/duty. During the Warranty period, there will normally be no charge for parts or labor.

- During the warranty period, MSB will repair or, at our discretion, replace a faulty product.
- Warranty repairs must be carried out by MSB or our authorized dealer. Please contact your dealer if your unit requires service. Warranty excludes:
  - The Warranty does not cover standard wear and tear.
  - The product is misused in any way.
  - Any unauthorized modifications or repairs were performed.
  - The product is not used in accordance with the Operating Conditions stated below.
  - The product is serviced or repaired by someone other than MSB or an authorized dealer.
  - The product is operated without a mains earth (or ground) connection.
  - The unit is returned inadequately packed.
- MSB reserves the right to apply a service charge if the product returned for warranty repair is found to be operating correctly, or if the product is returned without a returns number (RMA) being issued. Operating Conditions:
  - Ambient temperature range: 32F to 90F, non-condensing.
  - The supply voltage must remain within the AC voltage specified on the power base.
  - Do not install the unit near heat sources such as radiators, air ducts, power amplifiers or in direct strong sunlight. This may cause the product to overheat.

Check our website for the most recent user guides, firmware, and drivers:

[www.msbtechnology.com](http://www.msbtechnology.com)

Technical support email is:

[techsupport@msbtechnology.com](mailto:techsupport@msbtechnology.com)

12.10.2020

## Documents / Resources

 <p>The Select DAC User Guide</p> <p><small>Check our website for the most recent user guides, firmware, and drivers: <a href="http://www.msbtechnology.com">www.msbtechnology.com</a> Technical support email is: <a href="mailto:techsupport@msbtechnology.com">techsupport@msbtechnology.com</a> 12.10.2020</small></p>	<p><a href="#">MSB TECHNOLOGY Select DAC</a> [pdf] User Guide Select DAC</p>
---	--