

 **Solutions**

**Msolutions MS-63U1C-XR USB-C Extender Set**



# Msolutions MS-63U1C-XR USB-C Extender Set User Guide

[Home](#) » [MSolutions](#) » **Msolutions MS-63U1C-XR USB-C Extender Set User Guide** 

## Contents

- [1 Msolutions MS-63U1C-XR USB-C Extender Set](#)
- [2 Introduction](#)
- [3 Key Features](#)
- [4 Connectivity Overview – Device](#)
- [5 Connectivity Overview – Host](#)
- [6 Understanding the LED's](#)
- [7 Category Cabling for Extenders](#)
- [8 Package Contents](#)
- [9 Schematic](#)
- [10 FAQ](#)
- [11 Documents / Resources](#)
  - [11.1 References](#)
- [12 Related Posts](#)

 **Solutions**

**Msolutions MS-63U1C-XR USB-C Extender Set**



## Notices

- This MSolutions product contains electrical components that may be damaged by electrical spikes, surges, electric shock, lightning strikes, etc. Use of surge protection is highly recommended in order to protect and extend the life of your equipment.
- The transmission distances of data over Cat cables are measured using TE CONNECTIVITY 1427071-6 EIA/TIA-568B termination (T568B) of cables is recommended for optimal performance. To minimise interference of unshielded twisted pairs in the Cat6A (or above) cable, do not run the Cat6A (or above) cabling with or in close parallel proximity to mains power cables.
- Do not substitute or use any other power supply other than the enclosed unit, or an MSolutions approved replacement. Do not disassemble either the Transmitter or Receiver units for any reason. Doing so will void the manufacturer's warranty.
- MSolutions reserves the right to change the specifications of this unit without prior notice. As a result of this, physical representations or graphical elements contained within this user guide may not be accurate.

## Introduction

- The MSolutions MS-63U1C-XR is a USB 3.2 Gen 1 USB-C extender allowing for a single USB-C data channel to be extended to distances of up to 100m over a single Cat6A (or above) cable infrastructure.
- The extender features RS-232 serial pass-through, which expands the capabilities of this extender kit for a variety of commercial uses.


## Key Features

- Uncompressed USB 3.2 Gen 1 extension of USB data up to 100m over single Cat6A (or above)
- 1x USB-C channel for up to 5Gbps data connectivity of USB-C devices across the links
- Flexible USB extension for: USB-C PTZ cameras, hard drives, laptops and other USB-C peripherals
- Bi-directional RS-232 serial pass through

## Connectivity Overview – Device


### Front panel:

- Cat6A (or above) Link – connect to Cat cable from receiver
- USB-C – connect USB-C peripheral

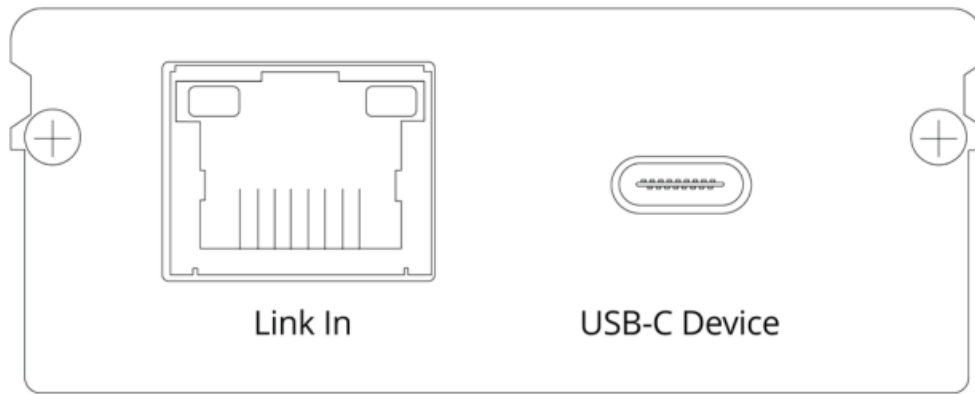


#### Back panel:

- Control – Micro USB for firmware and control (reserved for future use)
- RS-232 – use supplied 3-pin phoenix connector to connect to serial device
- Power – connect to 12V/2A DC power supply

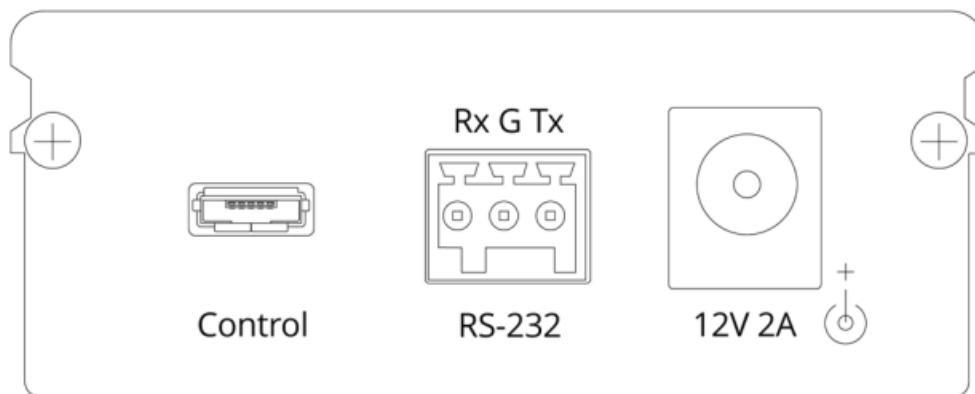


#### Connectivity Overview – Host

- Front panel:
- Cat6A (or above) Link – connect to Cat cable from device
- USB-C – connect USB-C host

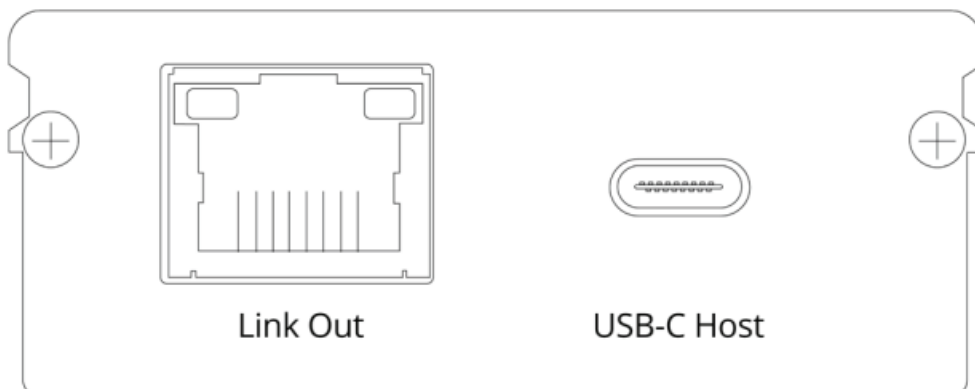

#### Back panel:

- Control – Micro USB for firmware and control (reserved for future use)
- RS-232 – use supplied 3-pin phoenix connector to connect to serial device
- Power – connect to 12V/2A DC power supply

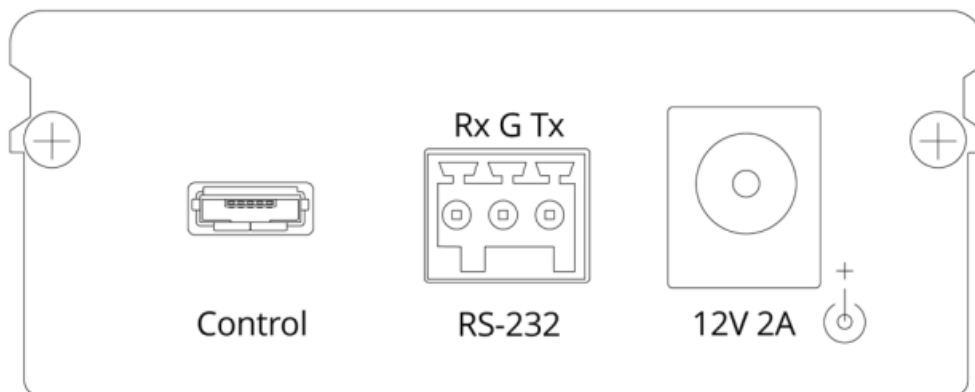

## Understanding the LED's

This MSolutions extender set includes status LED indicators on both the Host and Device products to show active connections and to further help integrators diagnose potential problems with the associated cabling. The RJ45 Link connections on both the host and device units have orange and green LED's.

- The orange LED indicates that the unit is receiving power. The LED will blink continuously when there is a link to the unit on the opposing side of the cable.
- The green LED indicates that the unit is communicating with the unit attached to the far side of the link over the Cat cable.

## Category Cabling for Extenders

It is important that the interconnecting category cable between the MSolutions products is terminated using the correct RJ45 pin configuration. The link category cable must be a 'straight' (pin-to-pin) category cable and it is advised that this is wired to the T568B wiring standard as this format is less prone to EMI (Electro-Magnetic Interference). When installing category cables it is advised that the best possible category cable quality possible is used. MSolutions recommends using a Cat6A (or above) cable for installations, especially when running over longer distances, in areas of high EMI, or with high data rate signal distribution.

## USB

- This USB 3.2 extender allows for USB-C peripherals including cameras, touch screens, smart boards, hard drives, games controllers, USB audio devices, printers, scanners, and HID's (mouse or keyboard) to be distributed over a distance of up to 100m to a USB-C host device on the far side of the link.
- The extender supports transparent true plug and play USB pass-through without the requirement of software or driver son the extender kit.
- A maximum combined data transfer of 5Gbps can be achieved over the link.
- The Micro-USB connections on both Host and Device units are utilised for firmware updating and are reserved for future CloudOS control.

**Note:** the USB-C connectivity does not support high-bandwidth video data from a laptop / tablet to a display due to

the limitation of available bandwidth.

### **RS-232 Control**

The MS-63U1C-XR can distribute bi-directional serial commands between the transmitter and receiver to allow for control commands to be sent alongside USB. Each unit is fitted with a 3-pin Phoenix connector block that will need the serial TX, RX, and Ground pins terminating into for serial pass-through. The link has the ability to transparently send any type of serial data as both pieces of equipment are able to communicate using the same baud rate, stop-gap, and parity.

### **Power**

12V 2A DC power connections on both Host and Device. Please only use the supplied 12V/2A DC PSUs supplied with the MSolutions MS-63U1C-XR to power the unit.

### **Specifications**

#### **Device**

- USB-C connectivity: 1 x USB-C (female peripheral)
- USB control: 1 x Micro USB (female)
- RS-232 connectivity: 1 x 3-pin Phoenix connector, block included
- Power supply: 1x 12V/2A DC
- Individual unit dimensions (W x D x H): 60 x 84 x 25mm
- Individual unit weight: 0.2kg
- Operating temperature: 32°F to 104°F (0°C to 40°C)
- Storage temperature: -4°F to 140°F (-20°C to 60°C)
- Operating humidity: 0-80% noncondensing

#### **Host**


- USB-C connectivity: 1 x USB-C (female) – host
- USB control: 1 x Micro USB (female)
- RS-232 connectivity: 1x 3-pin Phoenix connector, block included
- Power supply: 1x 12V/2A DC
- Individual unit dimensions (W x D x H): 60 x 84 x 25mm
- Individual unit weight: 0.2kg
- Operating temperature: 32°F to 104°F (0°C to 40°C)
- Storage temperature: -4°F to 140°F (-20°C to 60°C)
- Operating humidity: 0-80% noncondensing

### **Package Contents**

- 1x MS-63U1C-XR Host
- 1x MS-63U1C-XR Device
- 2 x 12V / 2A DC power supply with US, UK, and EU clips
- 1 x USB-C (male) to USB-A (female) cable
- 2 x 3-pin Phoenix connector blocks
- 2 x Surface mounting brackets

## Schematic

### MS-63U1C-XR Schematic

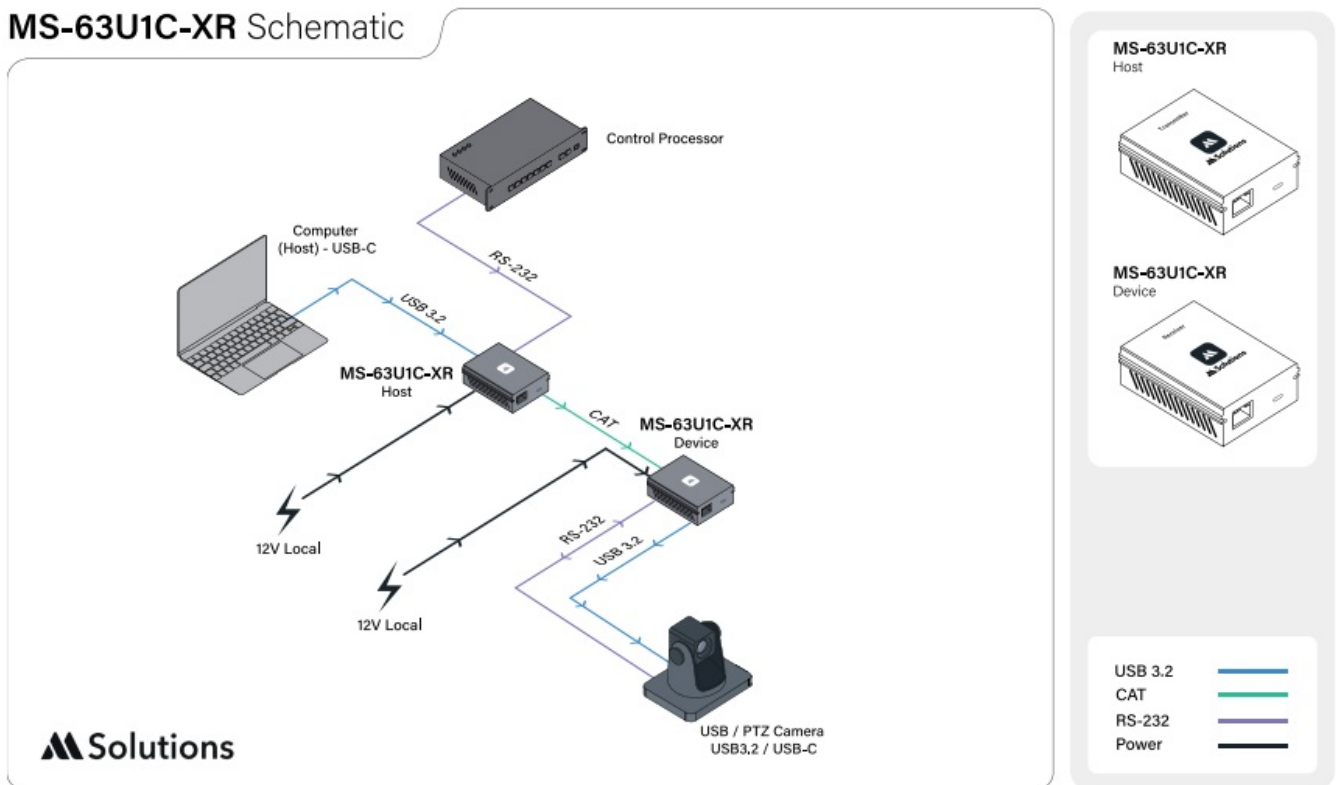

[www.m4sol.com](http://www.m4sol.com)

## FAQ

• **Q: Can I use Cat5e cable instead of Cat6A for this extender?**

A: It is recommended to use Cat6A (or above) cabling for optimal performance and to achieve the maximum distance of 100m. While Cat5e may work, it may not provide the same level of performance and distance extension.


• **Q: What baud rate, stopgap, and parity settings are supported for serial communication?**

A: The extender kit supports transparent communication of serial data with the ability to use any baud rate, stopgap, and parity settings as long as both connected devices are configured with the same parameters.


• **Q: Can I use a different power supply other than the supplied 12V/2A DC PSUs?**

A: It is recommended to only use the provided 12V/2A DC power supplies to ensure proper power delivery and safe operation of the MS-63U1C-XR extender kit.

## Documents / Resources

<p><b>M Solutions</b></p> <p>User Guide</p> <p>MS-63U1C-XR</p> <p>USB-C Extender Set - 100m 100m</p> <p>Power Supply (12V/2A)</p> 	<p><a href="#">Msolutions MS-63U1C-XR USB-C Extender Set</a> [pdf] User Guide</p> <p>MS-63U1C-XR, MS-63U1C-XR USB-C Extender Set, MS-63U1C-XR, USB-C Extender Set, Extender Set, Set</p>
---	--

## References

-  [Msolutions - Pro AV Solutions, HDBaseT Products and Tools!](#)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.