




MULTIPLEX FreshBlender Decal Installation Guide

[Home](#) » [MULTIPLEX](#) » MULTIPLEX FreshBlender Decal Installation Guide 

MULTIPLEX FreshBlender Decal

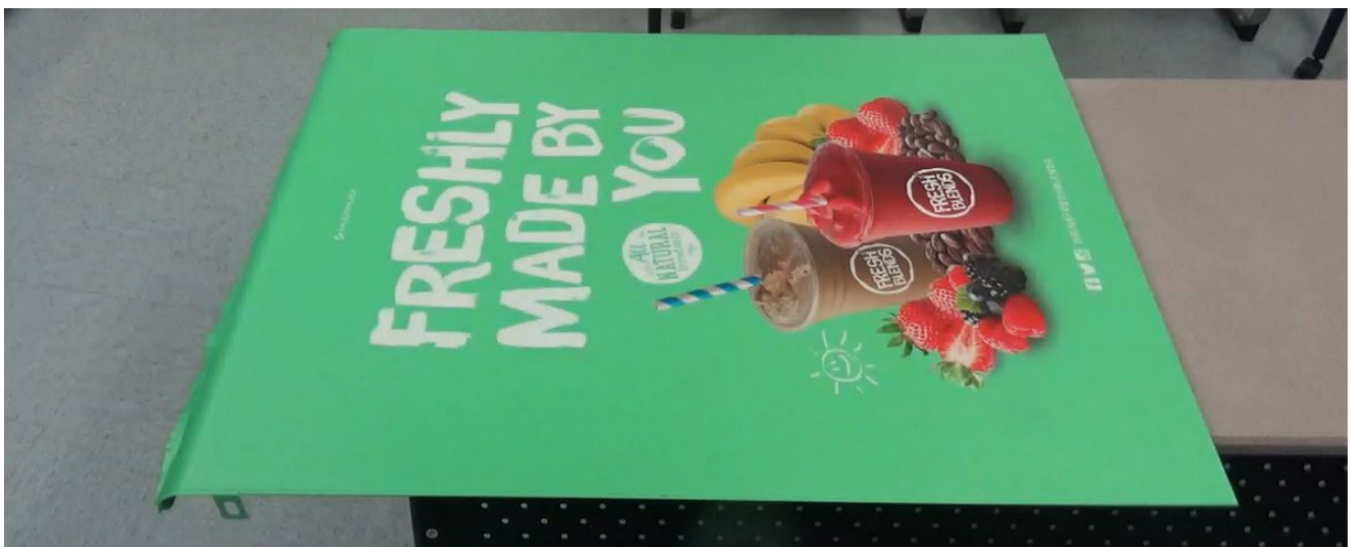

Contents

- [1 TOOLS REQUIRED](#)
- [2 PARTS REQUIRED](#)
- [3 TECHNICAL SUPPORT](#)
- [4 CUSTOMER SUPPORT](#)
- [5 Documents / Resources](#)
- [6 Related Posts](#)

TOOLS REQUIRED

- Scissors

- Hand Decal Applicator/Smoothing Tool
- Clean Cloths, low-lint
- Isopropyl Alcohol (70-90%)

PARTS REQUIRED

- Decals

NOTE: Contact Multiplex Technical Support for part numbers.

TECHNICAL SUPPORT


Country	Tech Support Phone Number
AUSTRALIA	1800-423-626
CANADA	1-844-724-2273
USA	1-844-724-2273



Warning

Power unit OFF and unplug from powersource to prevent electrical shock.

1. If decals are rolled up, lay decal on a flat surface to remove curling.
2. Power unit OFF and unplug, then unlock door.

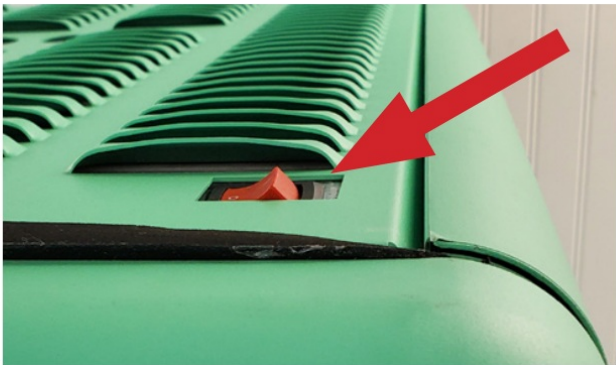

3. Remove left and right side panels if replacing decals on side panels.

NOTE: Front top door must be open to remove right-side panel.

SIDE PANEL DECAL



4. Lay side panel on flat surface with clips and curve hanging over edges so panel is flat.



5. Peel 2-3 inches (5-8cm) of old decal back along one edge.



6. Using scissors cut 2-3 inch (5-8cm) slits 6 inches (15cm) apart along loose edge.





7. Using scissors cut 2-3 inch (5-8cm) slits 6 inches (15cm) apart along loose edge.



8. Continue peeling old decal off in strips.



9. Spray panel surface with isopropyl alcohol , scrub surface with clean cloth to remove dirt or adhesive residue. Dry thoroughly with a different clean cloth. Make sure surface is dry and dirt/lint free.

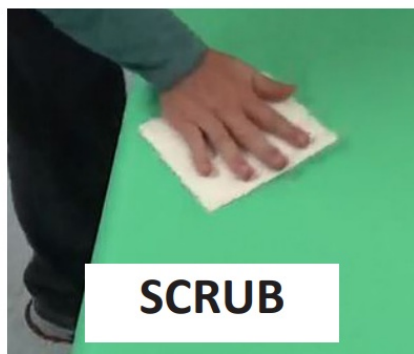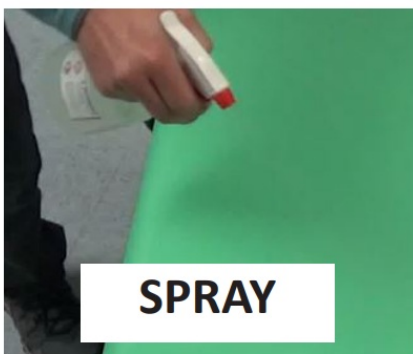


10. Lay new decal face-up over clean panel and peel back 4- inches (10-13cm) along top edge. Do not take back of new decal off at this time.

NOTE: Curved edge is top of panel. Top of decal should be oriented along top of panel.




11. Locate two (2) alignment marks on new decal.

ALIGNMENT MARKS

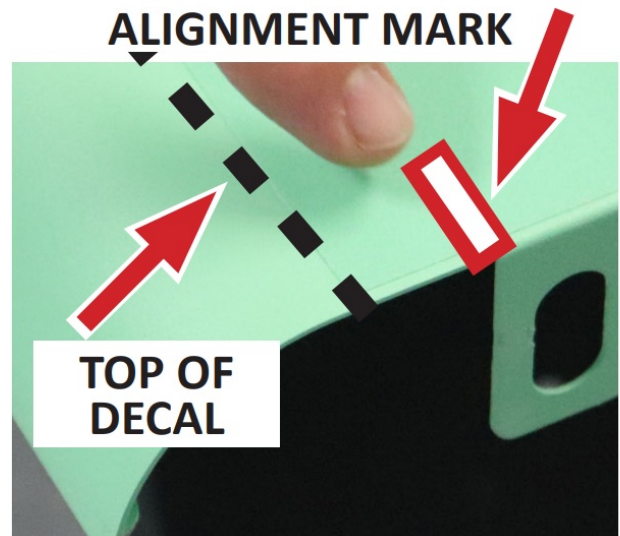

12. Align two (2) decal alignment marks with the two (2) clips located toward top of panel.

NOTE: Do NOT align top of decal with top edge of panel, use alignment marks.

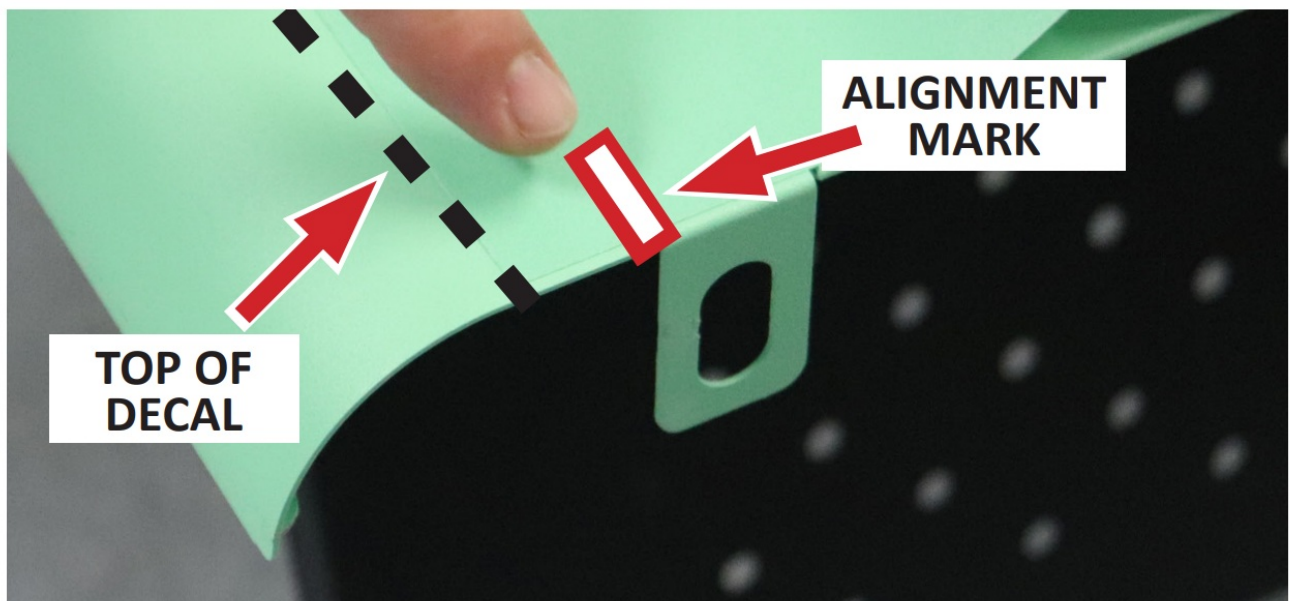

13. Using clean hands start at center of decal and gently press outwards to secure the exposed adhesive back of decal to panel.



14. Use decal applicator/smoothing tool to press out bubbles along top edge of decal to firmly secure exposed adhesive to panel.



15. With one hand remove remaining backing while guiding the decal onto the panel with other hand.



16. With one hand remove remaining backing while guiding the decal onto the panel with other hand.



17. Repeat process for other panel if necessary.
18. Reinstall both panels.
19. Close and lock upper front door.
20. Plug in unit and power ON.
21. Verify drain is correctly connected.

REFRIGERATED CABINET DOOR DECAL

22. Peel 2-3 inches (5-8cm) of old decal back along one edge.




23. Using scissors cut 2-3 inch (5-8cm) slits 6 inches (15cm) apart along loose edge.



24. Starting at edge with slits, peel away old decal in strips.



25. Spray panel surface with isopropyl alcohol , scrub surface with clean cloth to remove dirt or adhesive residue. Dry thoroughly with a different clean cloth. Make sure surface is dry and dirt/lint free.

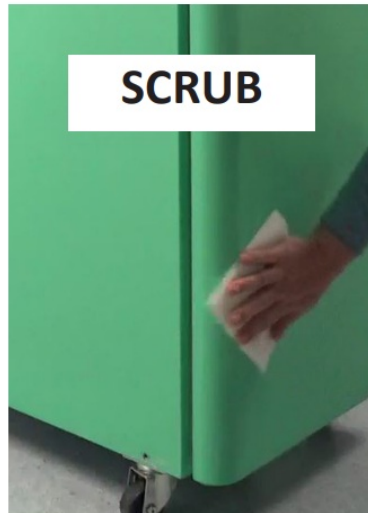

26. Lay new decal face-up on clean surface and peel back 4- inches (10-13cm) along top edge. Do not take back of new decal off at this time.



27. Center and align top of new decal with refrigerated cabinet door.



28. Using clean hands start at center of decal and gently press outwards to secure the exposed adhesive back of

decal to panel.

29. Use decal applicator/smoothing tool to press out bubbles along top edge of decal to firmly secure exposed adhesive to panel.



30. With one hand remove remaining backing while guiding the decal onto the panel with other hand.



31. Starting at the top of the decal use decal applicator tool to press bubbles out of decal using short strokes moving down towards floor.



CONFIRM OPERATION


32. Verify drain is correctly connected.
33. Make several drinks with manager present to confirm operation.

CUSTOMER SUPPORT

MULTIPLEX
645 PARK EAST BLVD SUITE 5, NEW ALBANY, IN 47150
800-689-0157 OR 844-724-CARE
WWW.MULTIPLEXBEVERAGE.COM
Refreshing the Experience



Documents / Resources

	<p>MULTIPLEX FreshBlender Decal [pdf] Installation Guide FreshBlender Decal, FreshBlender, Decal</p>
---	--