



NavAtlas NA1BT Digital Bluetooth Controller Owner's Manual

[Home](#) » [NavAtlas](#) » NavAtlas NA1BT Digital Bluetooth Controller Owner's Manual

Contents [[hide](#)]


- [1 NavAtlas NA1BT Digital Bluetooth Controller](#)
- [2 CONTROLLER MOUNTING](#)
- [3 UNIVERSAL INSTALLATION](#)
- [4 GETTING STARTED](#)
- [5 BLUETOOTH OPERATION](#)
- [6 STREAMING MUSIC](#)
- [7 AUX-INPUT](#)
- [8 FCC Compliance](#)
- [9 Documents / Resources](#)
- [10 Related Posts](#)




NavAtlas NA1BT Digital Bluetooth Controller




CONTROLLER MOUNTING

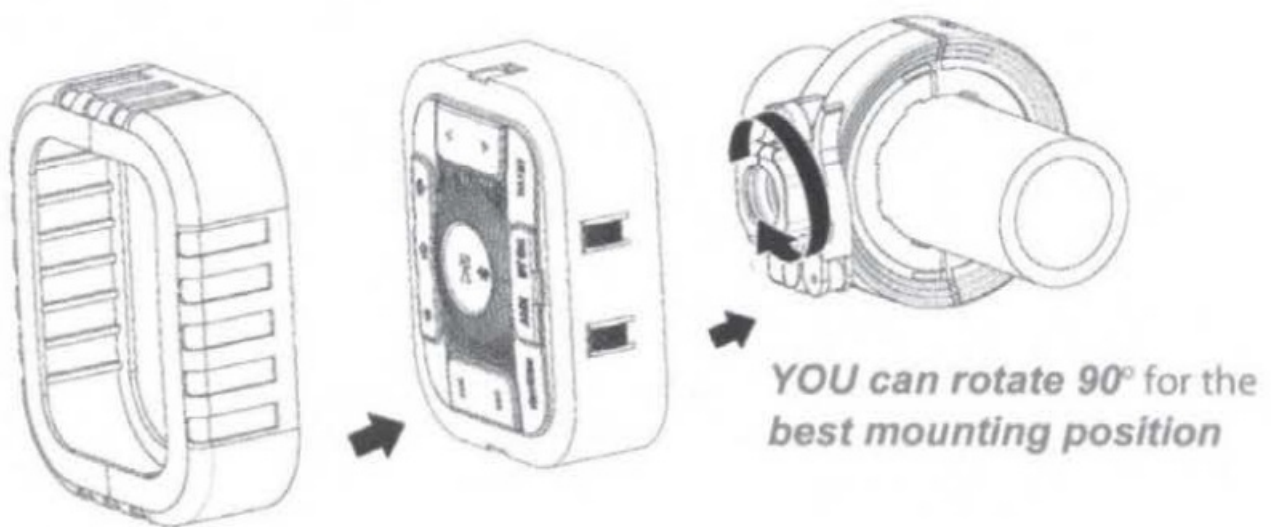

ROLLBAR | CAGE MOUNT

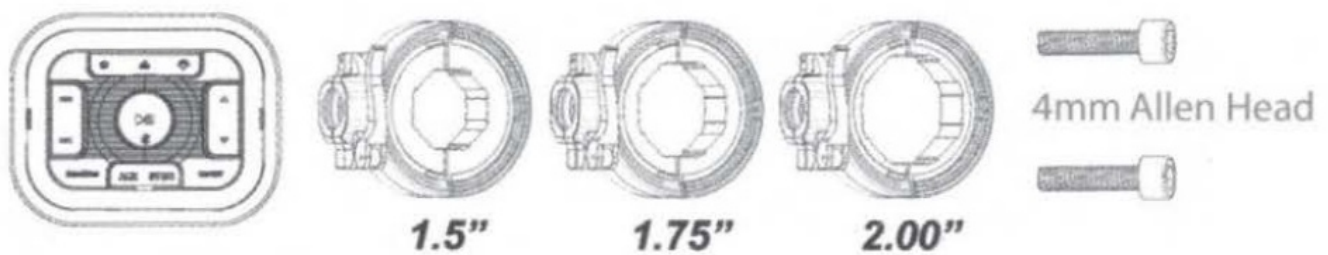


FLUSH MOUNT

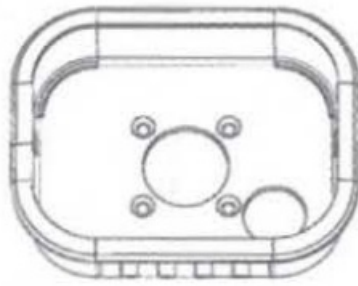


1. Always check mounting depth before cutting
2. Use the flush bezel as template
3. Cutout hole exactly
4. Insert flush mount bezel, push side tabs outwards
5. Use optional silicon glue to give extra hold
6. Insert CONTROLLER

SURFACE MOUNT

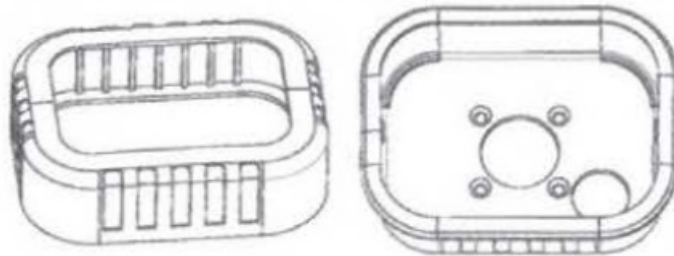


1. Check mounting depth before drilling
2. Use the flush bezel as template
3. Drill or cut wire hole exactly
4. Insert rubber bim around flush bezel, screw in place
5. Insert CONTROLLER

TOOLS NEEDED:



- Crimp Tool
- Wrench or Pliers
- 4mm Allen Wrench

UNIVERSAL INSTALLATION

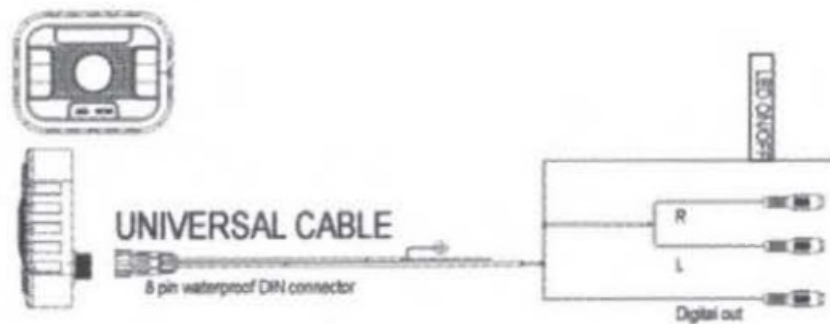

POWER


- **RED** – 12V+ACC
- **BLACK** – CHASSIS GROUND
- **BLUE** – OPTIONAL LED CONTROL

AUDIO

- **RED RCA** – ANALOG RIGHT
- **WHITE RCA**-ANALOG LEFT
- **GREY RCA**- DIGITAL CO-AXIAL OUTPUT


ANALOG INSTALLATION WIAFTERMARKET AMPS

WHEN USING AFTERMARKET AMPLIFIERS WITH SOUNDBARS. YOU MUST USE ANALOG CABLES FOR DASIY CHAIN FUNCTION TO WORK. A2A CABLE(SOLO SEPARATELY) IS REQUIRED FOR ANALOG AUDIO OUTPUT TO WORK IN THIS SETUP.

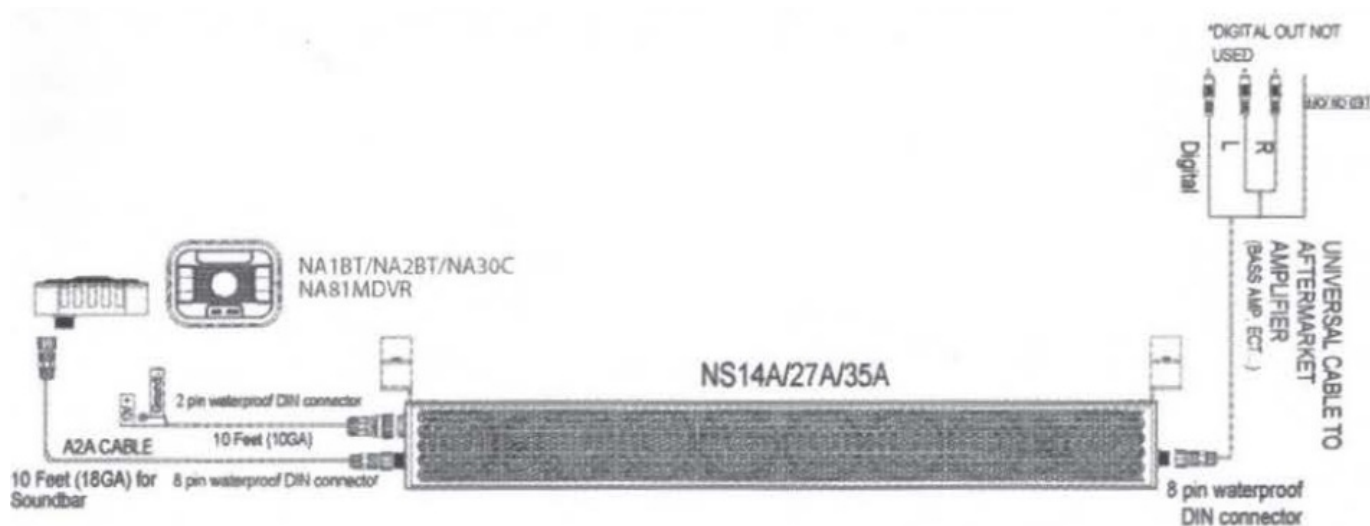


EXAMPLE OF DAISY CHAIN DIGITAL CONFIGURATIONS FOR ANY VEHICLE

*OPTIONAL ACCESSORIES ARE D2Y AND D2D CABLES (SOLD SEPARATELY)

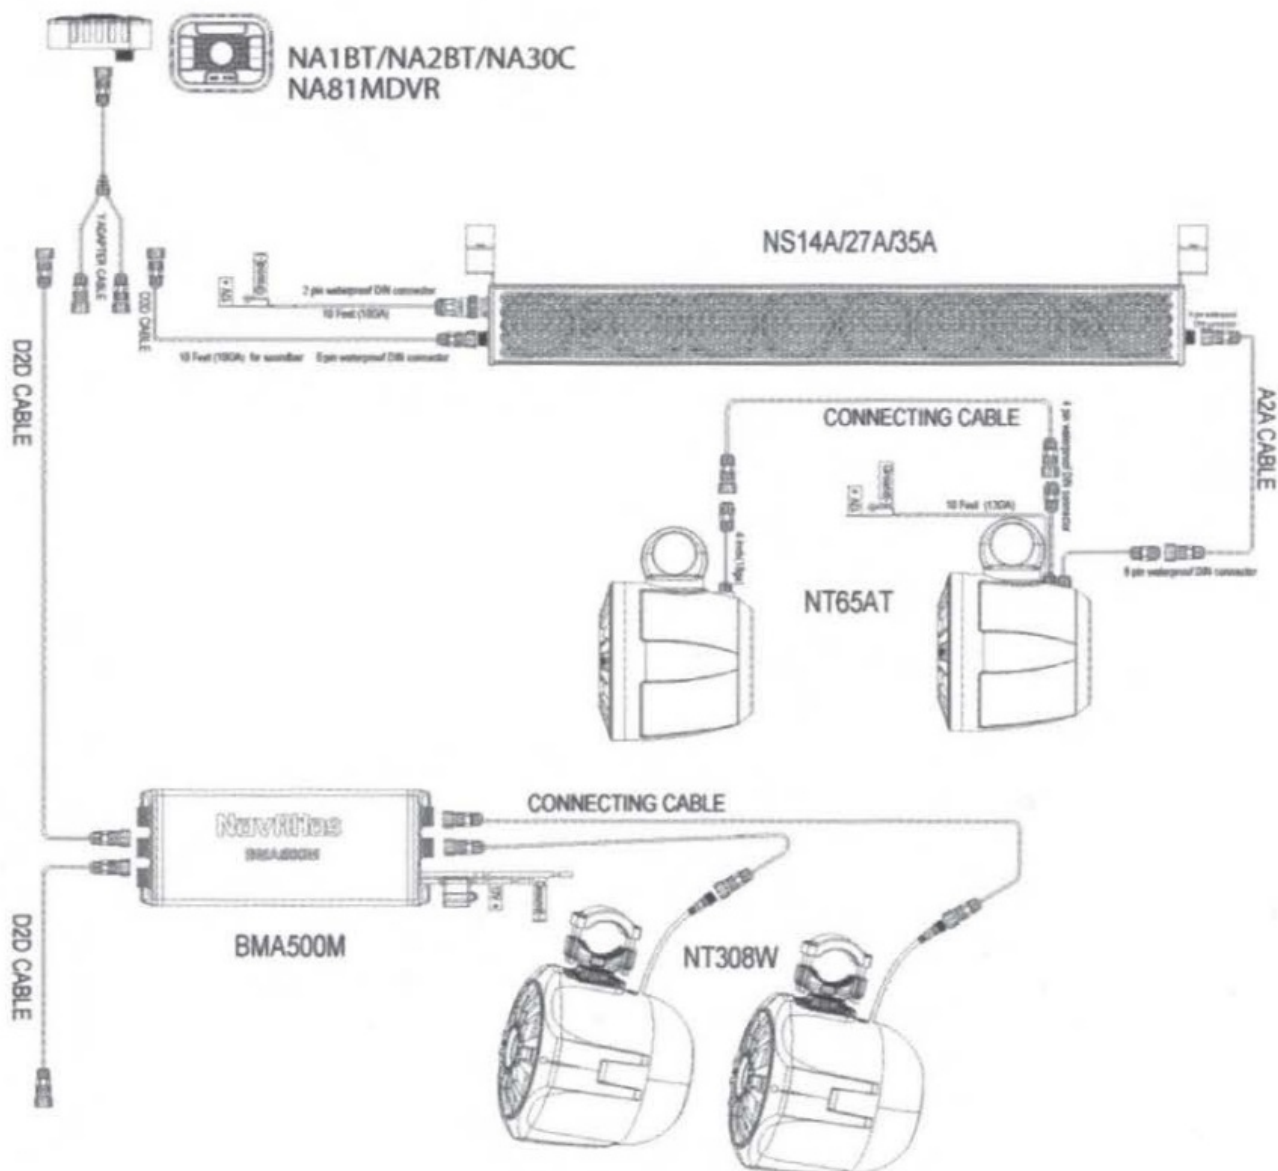

GETTING STARTED

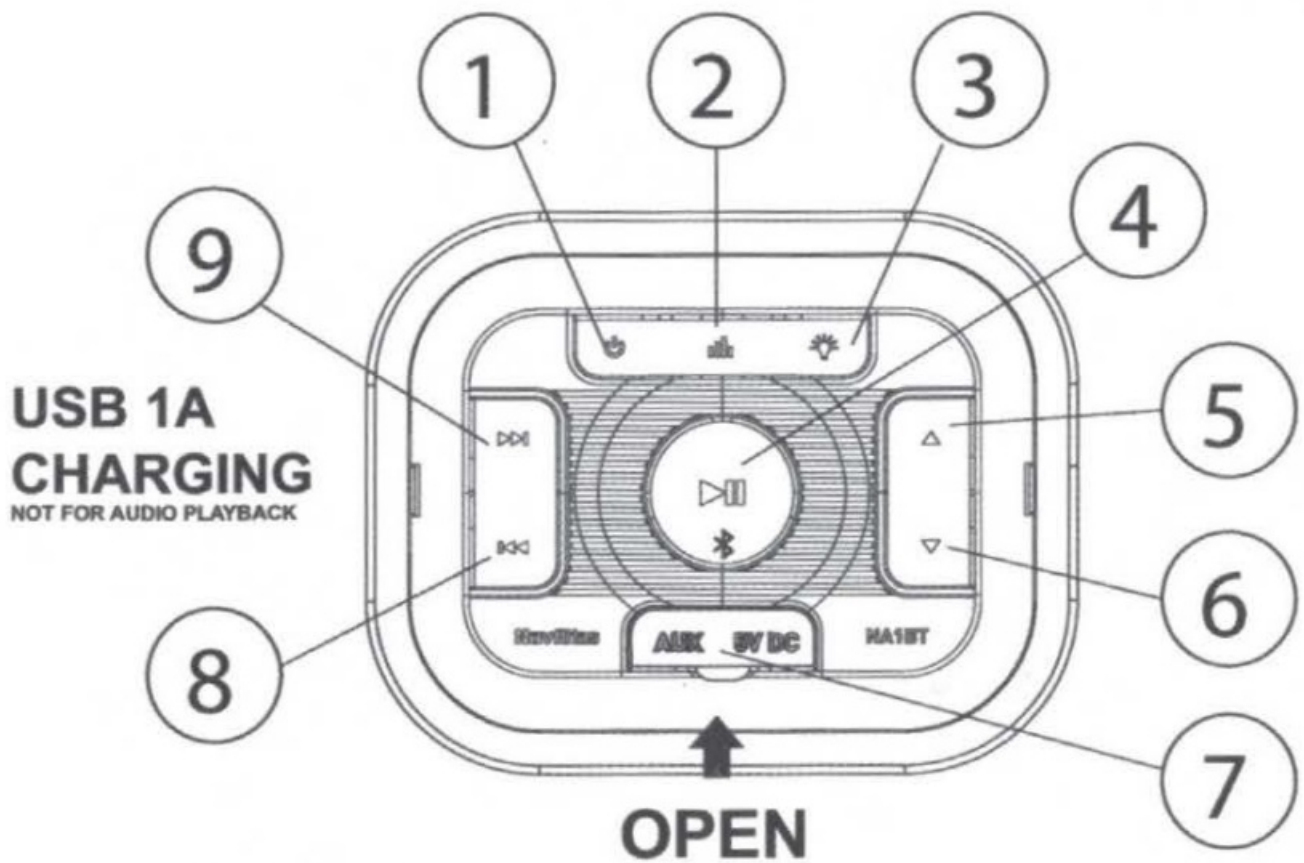


NOTE: TO AVOID WATER DAMAGE, PLEASE KEEP AUX/USB COVER CLOSED WHEN NOT IN USE.

1. POWER ON
2. EQ MODES: FLAT – LOW – MID-HIGH*
3. LED LIGHT ON/OFF
4. PLAY/PAUSE/MUTE
5. VOLUME UP
6. VOLUME DOWN
7. AUX INPUT/USB CHARGING
8. PREVIOUS TRACK
9. NEXT TRACK

NOTE: WHEN USING EQ MODES, SOME MUSIC CAN DISTORT AT MAX VOLUME ON CERTAIN PHONES/DEVICES

BLUETOOTH OPERATION

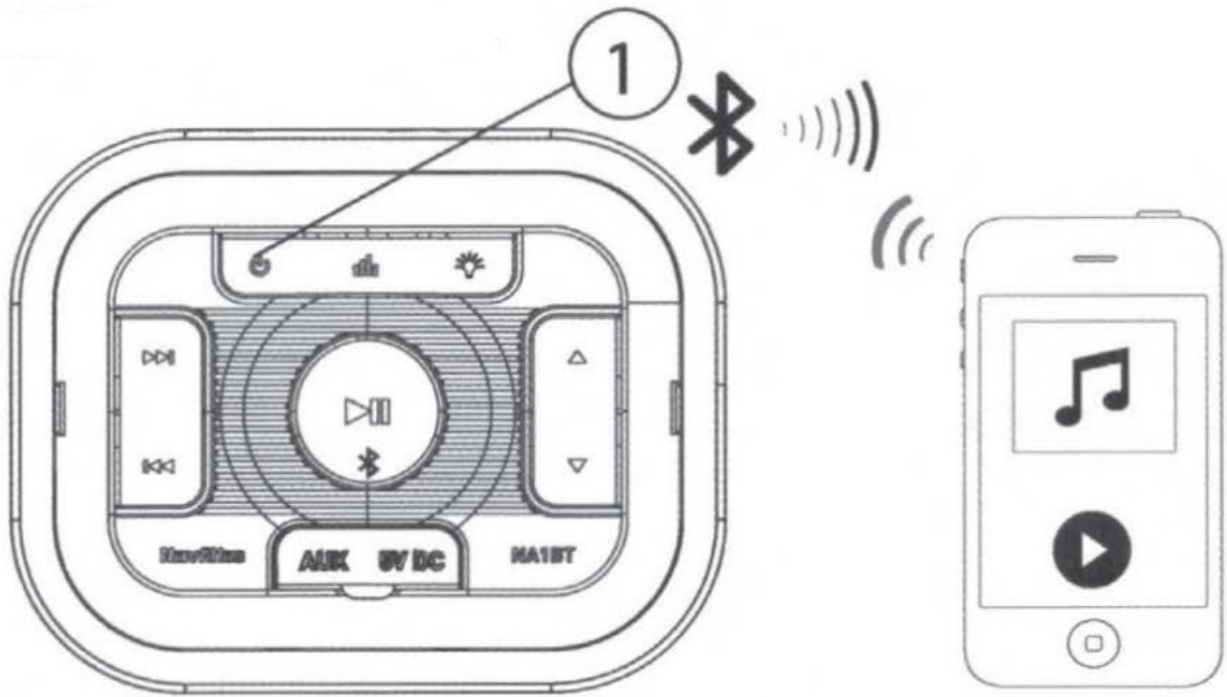

PAIRING & DISCOVERING A NEW BLUETOOTH CONNECTION

1. Power on the CONTROLLER by short-pressing the G) Power button

NOTE: You have 2 minutes before you must restart this procedure over again.

2. The CONTROLLER is now in pairing mode:

- **ANDROID users:**


- a. Go into the Settings Menu of your device
- b. Enter the Bluetooth Menu
- c. TURN ON Bluetooth and press SCAN
- d. "NA 1 BT " will now be displayed under AVAILABLE DEVICES

- **OS users:**

- a. Go into the Settings Menu of your /OS device
- b. Enter the Bluetooth Menu
- c. TURN ON Bluetooth
- d. "NA1BT" will now be displayed

3. If NA 1 BT is not seen, repeat the above steps to refresh the "Device List"
4. When the connection is successful a tone will be heard, and the Bluetooth LED indicator will light solid, you are now ready to stream music from your player to the CONTROLLER


RECONNECTION

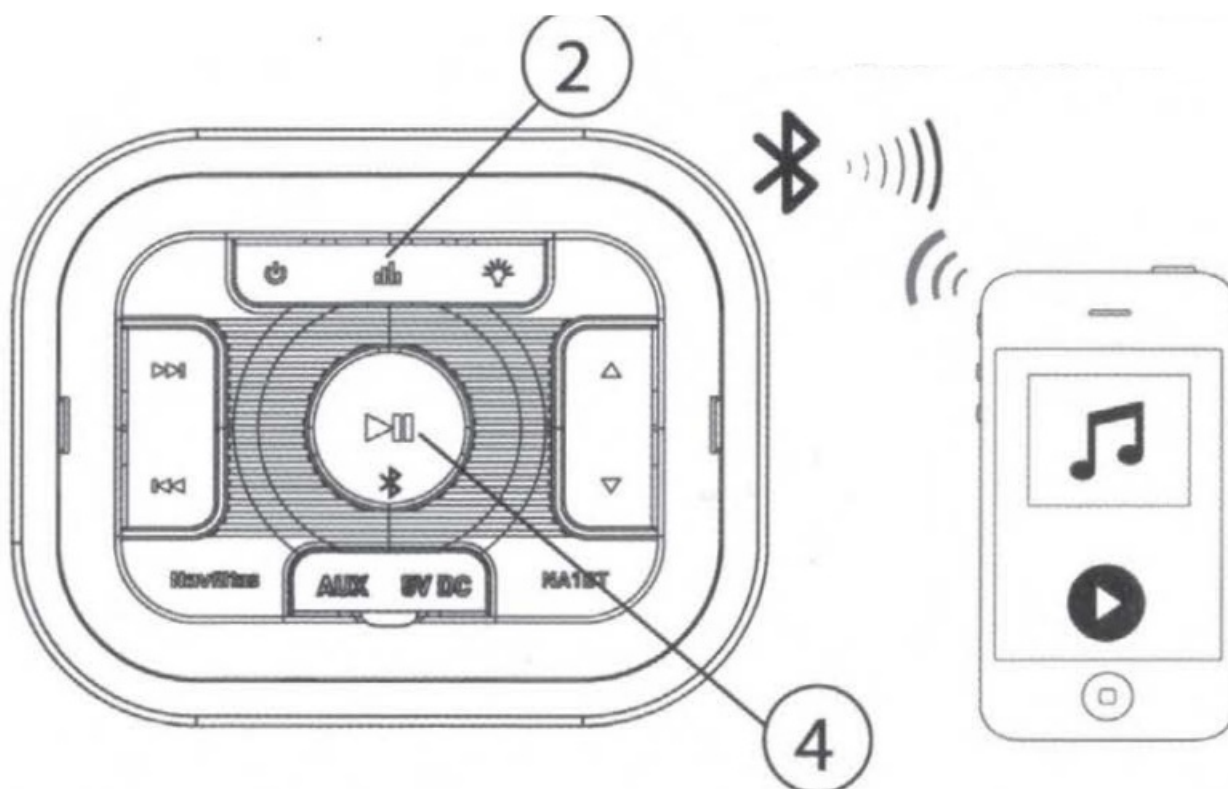

1. Power on the CONTROLLER and your last paired device Bluetooth.
2. Ensure you are within range of the CONTROLLER, the unit will now automatically reconnect
3. If the device is out of range from the CONTROLLER, it will disconnect automatically:
 - **a.** The CONTROLLER will reconnect automatically to your device when in range
4. If your device was previously paired with the CONTROLLER, but it wasn't the last paired device:
 - **a.** Ensure no other devices are currently paired
 - **b.** Enter the Bluetooth Menu on your device being paired
 - **c.** "NA1BT" will display under AVAILABLE DEVICES
 - **d.** Choose the "NA1Br" to reconnect
5. long press 0 ml& EQ button 3~6 seconds, reset paired device list.
6. Long press ©[>(I) PLA YIPAUSE button 3~6 seconds, enter pairing mode.

NOTE: Some devices may require a manual Bluetooth reconnection once the devices Bluetooth is powered OFF I ON and/or back in range.

STREAMING MUSIC

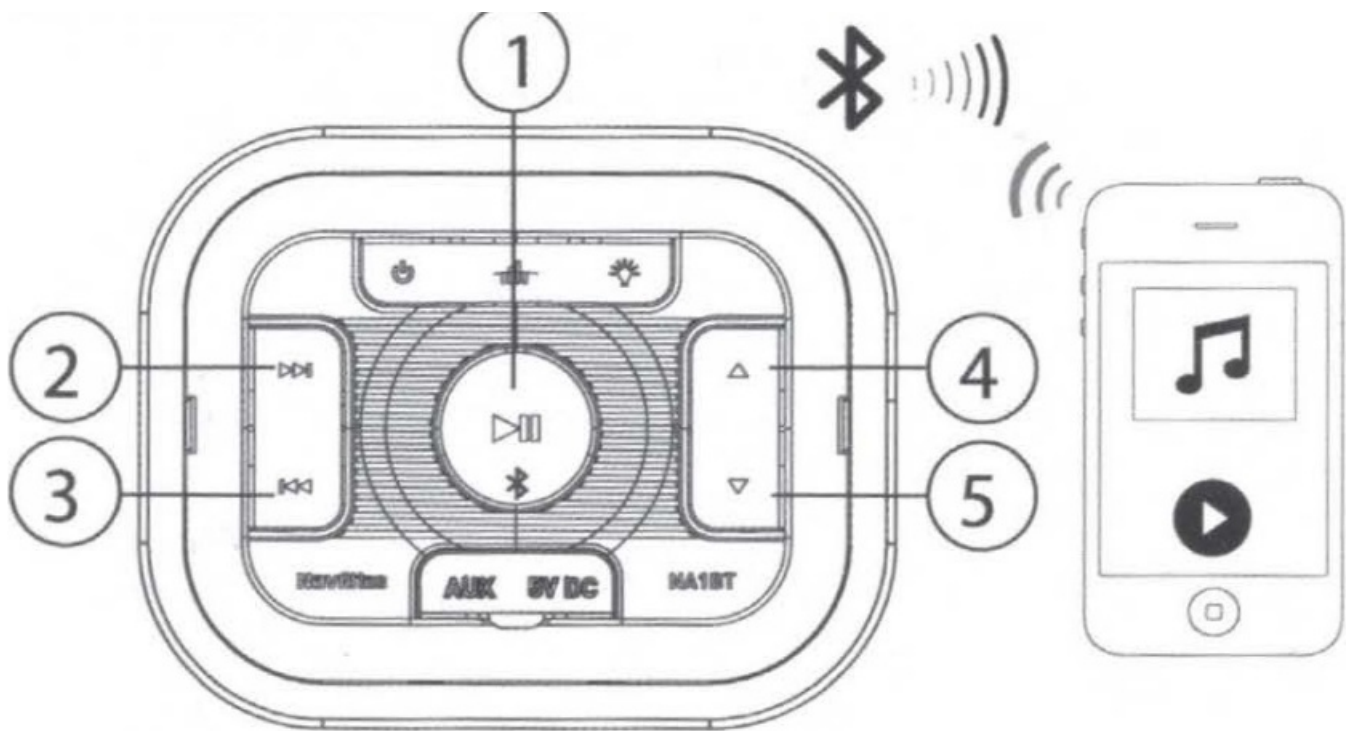

BLUETOOTH OPERATION

1. Press the **1** PLA YIPAUSE once to start playing music or press the PLAY button from your devices touch screen
2. To skip songs or advance, press the **2** NEXT TRACK button
3. To select the previous song, press the **3** PREVIOUS TRACK button

VOLUME CONTROL


4. To raise the volume press the **4** VOLUME UP button or use your devices contra!
5. To lower the volume press the **5** VOLUME DOWN button or use your device's controls

NOTE: Some devices use independent volume control, for most devices the volume control on the controller will adjust the phone volume, in other cases you will need to raise the phone volume to max in order hear the music clearly.

WARNING: DO NOT USE AUX AND BLUETOOTH AT THE SAME TIME.

NOTE: Bluetooth HD Streaming is available on devices/phones that support this function/codec.

AUX-INPUT

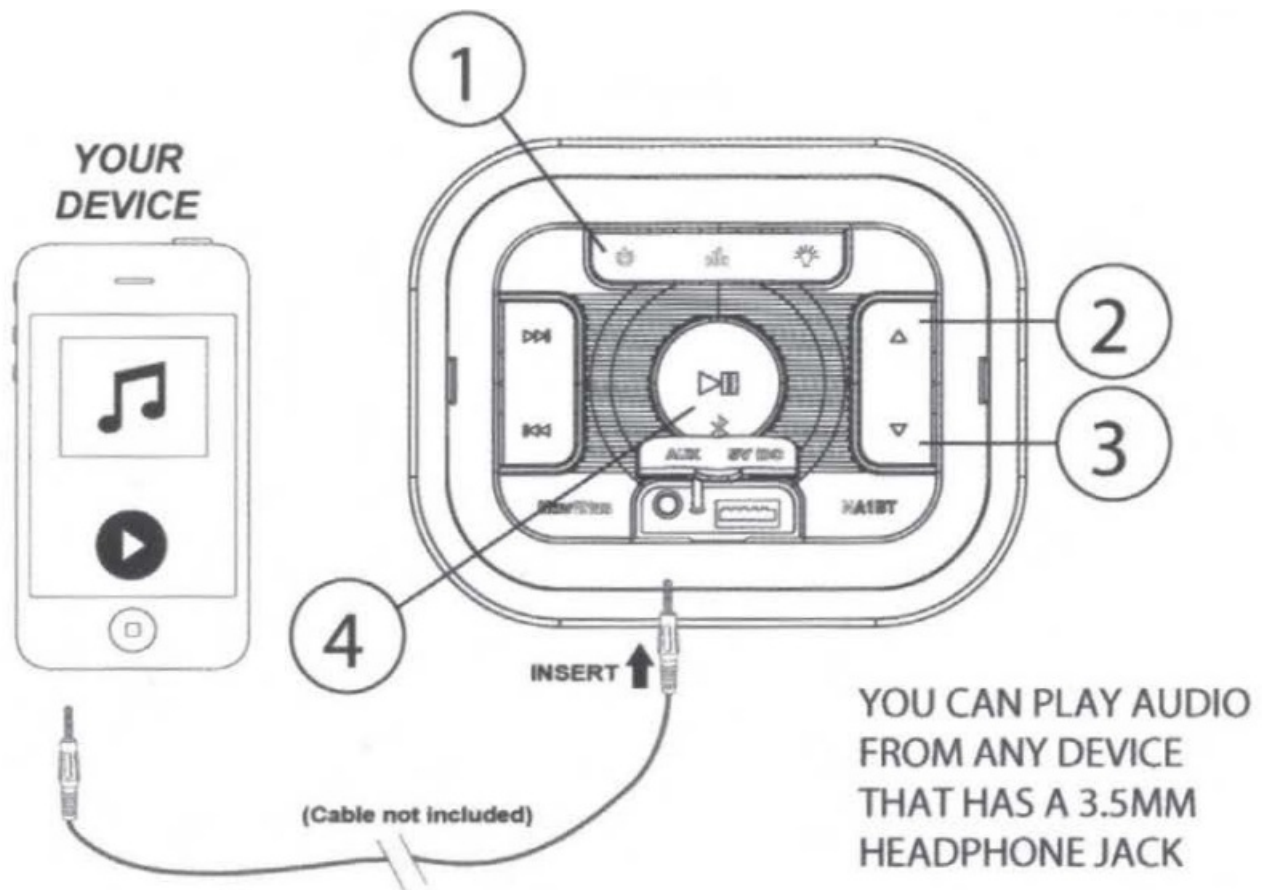

CONTROLLER AUX-IN OPERATION

1. Power on the CONTROLLER by pressing and holding down the **1** POWER button for 3 seconds
2. Disconnect any paired Bluetooth device by turning off Bluetooth in your devices Settings Menu
3. Connect your 3.5mm AUX-IN cable located on front side of the CONTROLLER to your devices headphone jack
4. Route the wire back to CONTROLLER, secure your device in a safe location

VOLUME CONTROL

5. To raise the volume press the **2** VOLUME UP button
6. To lower the volume press the **3** VOLUME DOWN button

FCC Compliance

This device complies with part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.

- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

To maintain compliance with FCC's RF Exposure guidelines, This equipment should be installed and operated with a minimum distance between 20cm the radiator your body: Use only the supplied antenna.

Support Line: 1-562-946-7471

9AM-5PM PST Monday-Friday


www.navatlas.com

All rights reserved.

NSA0318-Vo1

Printed in China

Documents / Resources

 <p>NA1BT INSTALLATION/OWNER'S MANUAL Digital Bluetooth® Controller</p>	<p>NavAtlas NA1BT Digital Bluetooth Controller [pdf] Owner's Manual NA1BT Digital Bluetooth Controller, NA1BT, Digital Bluetooth Controller, Bluetooth Controller, Controller</p>
--	---