

81550 Bar Collaboration Bar designed for Microsoft Teams with Neat Pad User Manual

Home » neat » 81550 Bar Collaboration Bar designed for Microsoft Teams with Neat Pad User Manual



Contents

- 1 81550 Bar Collaboration Bar designed for Microsoft Teams with Neat
- 2 Simple setup
- 2.1 Wall mount
- 2.2 Screen mount
- 2.3 Table stand
- 3 Neat Bar
 - 3.1 In the box
- 4 Neat Pad
 - 4.1 In the box
- 5 Mounting & releasing
 - 5.1 Mounting
 - 5.2 Releasing
- 6 Size & weight
 - 6.1 Neat Bar
 - 6.2 Neat Pad
- 7 Setup & connectivity
 - 7.1 Setup
 - 7.2 Requirements for a complete setup Display
- **8 Environmental Requirements**
- 9 Documents / Resources
 - 9.1 References
- **10 Related Posts**





Neat Bar is a compact and highly capable meeting device. It's perfect for bringing superior quality audio and video to your huddle, focus and meeting spaces. Neat Bar includes Camera, Speakers, Microphones and environmental sensors all in one compact design. Neat Bar comes with a dedicated Neat Pad Controller and optional Scheduling Display.

Simple setup

All you need is in the box, including mounts, cables and clear instructions. So it's easy for anyone to install and set-up, above or below one or two screens.

Wall mount







Screen mount







Table stand





Neat Bar

Neat Bar comes with everything you need to get started, including cables, wall mount, screen mount and table stand.

In the box

Neat Bar: All-in-one audio and video device

HDMI cable: 6.5t (2m)Ethernet cable: 9.8t (3m)Power cord: 9.8t (3m)

• Mount adapter, wall mount, screen mount and table stand.


• 4 × M4 screw (0.94 in / 24 mm) for VESA mount.

• $4 \times M4$ screw (0.94 in / 24 mm) for VESA mount.

• 2 × spacer to secure parallel TV mount.

• 1 × 5 mm hex key for the screen mount.

• 1 × 2 mm hex key for the mount adapter.

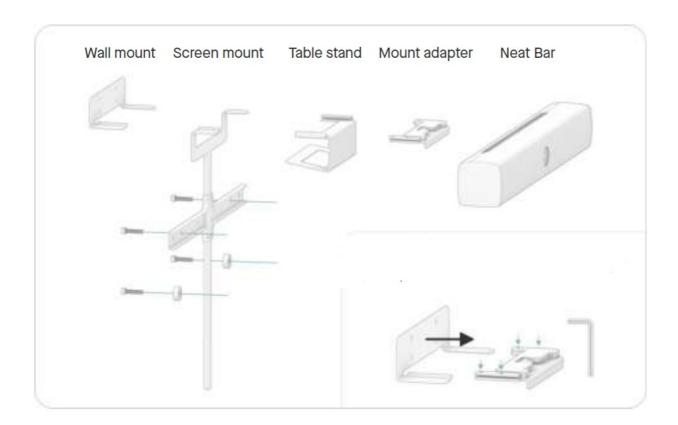


Slide the selected bracket onto the mount adapter and secure with the hex wrench. Screws for mounting to the wall are not included. Mounting on a wall should only be performed by qualified personnel in line with applicable facility and state regulations. The wall and the mounting equipment must safely withstand the load of the product.

Neat Pad

Neat Pad works as a Controller for Neat Bar and can also be configured as a Scheduling Display for the Meeting Room. It comes with everything you need to get started, including cables and mounting options.

In the box

- Neat Pad: 8-inch touch screen.
- 2 × Ethernet cable: 9.8ft (3m) + 16.4ft (5m) PoE power adapter.
- Mount adapter, side mount and wall mount.
- $4 \times M4$ screw (0.30 in / 7.5 mm) for the wall mount.
- $3 \times M4$ screw (0.19 in / 4.7 mm) for the side mount.
- 1×2.5 mm hex key for the adapters.
- 1 × 2 mm hex key to secure Neat Pad to the wall mount.

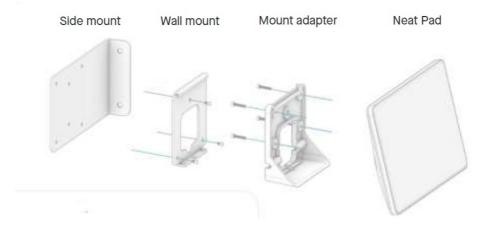

Hook the mount adapter onto the wall mount and secure with the hex wrench.



Screws for mounting to the wall are not included. Mounting on a wall should only be performed by qualified personnel in line with applicable facility and state regulations. The wall and the mounting equipment must safely withstand the load of the product.

Mounting & releasing

Mounting



Slide Neat Bar onto the selected mounting option (1). When fully inserted tilt Neat Bar back to horizontal and check if it is secure by carefully pulling it towards you.

Releasing



To release Neat Bar from the selected mounting option, tilt the unit to maximum tilt (1) and carefully slide the unit towards you (2).

Warning

Do not leave Neat Bar in a max tilted position with the red indicator showing as it is not secured by the lock spring.



Size & weight


Neat Bar

• Width: 21.9 in (556 mm)

• Height: 3 in (76 mm)

• Depth: 3 in (76 mm)

• Weight: 3.75 pounds (1.7 kg)

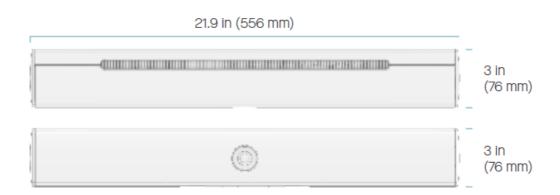


• Width: 7.8 in (198 mm)

• Height: 1.7 in (42 mm)

Neat Pad

Width: 7.8 in (198 mm)Height: 1.7 in (42 mm)




Setup & connectivity

Setup


Use the provided cables to set up Neat Bar. Connect the cables according to the illustration. Cables marked are included. Cables marked are optional and not required for basic use of the system.

Requirements for a complete setup Display

Internet connection Video service.

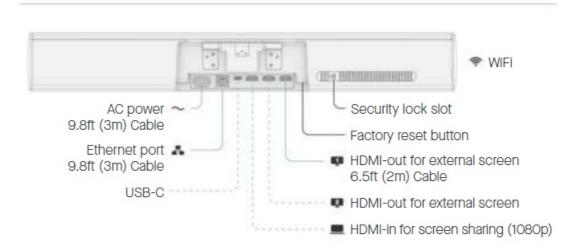

The 16.4ft (5m) Ethernet Cable provided is not to be used for in-wall installation. In-wall cable routing should only be performed by qualified personnel using appropriate equipment.

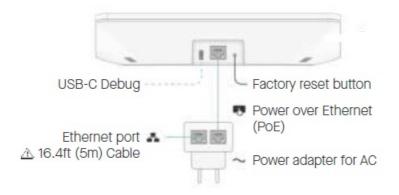

Environmental Requirements

• Ambient operating temperature: 32° to 95° F (0° – 35° C)

• Storage temperature: 5° - 149° F (-15° - 65° C

• Relative humidity: 20% to 80%

Additional Product Information

htps://neat.no/bar

Documents / Resources



neat 81550 Bar Collaboration Bar designed for Microsoft Teams with Neat Pad [pdf] User Manual

81550 Bar Collaboration Bar designed for Microsoft Teams with Neat Pad, 81550, Bar Collaboration Bar designed for Microsoft Teams with Neat Pad, Neat Pad, Pad

References

• Neat Bar - Neat

Manuals+,