

Gen 2 Neat Bar Video Conferencing Device



Gen 2 Neat Bar Video Conferencing Device User Manual

[Home](#) » [neat](#) » Gen 2 Neat Bar Video Conferencing Device User Manual 

Contents

- 1 Gen 2 Neat Bar Video Conferencing Device
- 2 Product Usage Instructions
- 3 Simple setup
- 4 In the box
- 5 Mounting & releasing
- 6 Size & weight
- 7 Setup & connectivity
- 8 Documents / Resources
 - 8.1 References

neat.

Gen 2 Neat Bar Video Conferencing Device



Specifications

- Neat Bar Gen 2:
 - Width: 25.59 in (650 mm)
 - Height: 2.76 in (70 mm)
 - Depth: 2.76 in (70 mm)

- Weight: 3.44 pounds (1.56 kg)
- Neat Pad:
 - Width: 7.8 in (198 mm)
 - Height: 1.7 in (42 mm)
 - Depth: 5 in (127 mm)
 - Weight: 1.15 pounds (520 g)

Product Usage Instructions

Neat Bar Setup

To set up the Neat Bar, follow these steps:

1. Use the provided HDMI, Ethernet, and power cables to connect the Neat Bar.
2. Mount the Neat Bar using the included mounts or stands.
3. Ensure the Neat Bar is securely installed above or below the screens.

Neat Pad Setup

Setting up the Neat Pad involves:

1. Hook the mount adapter onto the wall mount and secure it with the hex wrench.
2. Mount the Neat Pad in the desired location, ensuring it is securely attached.

Mounting & Releasing Neat Bar

To mount and release the Neat Bar:

- **Mounting:**
 1. Slide Neat Bar onto the selected mounting option.
 2. Tilt the Neat Bar back to horizontal and check if it is secure by gently pulling it towards you.
- **Releasing:**
 1. Tilt Neat Bar fully forward.
 2. Pull towards you until the red release lever appears.
 3. Push the release lever up and pull Neat Bar gently off the mount adapter.

Setup & Connectivity

To complete the setup:

1. Use the provided cables to connect the Neat Bar according to the illustration.
2. Certain cables are optional and not required for basic system use.

FAQ

Q: Are screws for mounting included in the package?

A: No, screws for mounting to the wall are not included.

Mounting on a wall should only be performed by qualified personnel.

Q: What is the weight of the Neat Bar Gen 2?

A: The weight of the Neat Bar Gen 2 is 3.44 pounds (1.56 kg).

Neat Bar is a compact and highly capable meeting room device.


It's perfect for bringing superior-quality audio and video to your huddle, focus, and meeting spaces for up to ten people.

Neat Bar includes a camera system, speakers, microphones and environmental sensors in one compact design and comes with a dedicated Neat Pad controller.



Neat Bar also has a USB-C port for optional single cable connection to your PC.

Simple setup

All you need is in the box, including mounts, cables and clear instructions. So it's easy to install and set up, above or below one or two screens (screen mount sold separately).

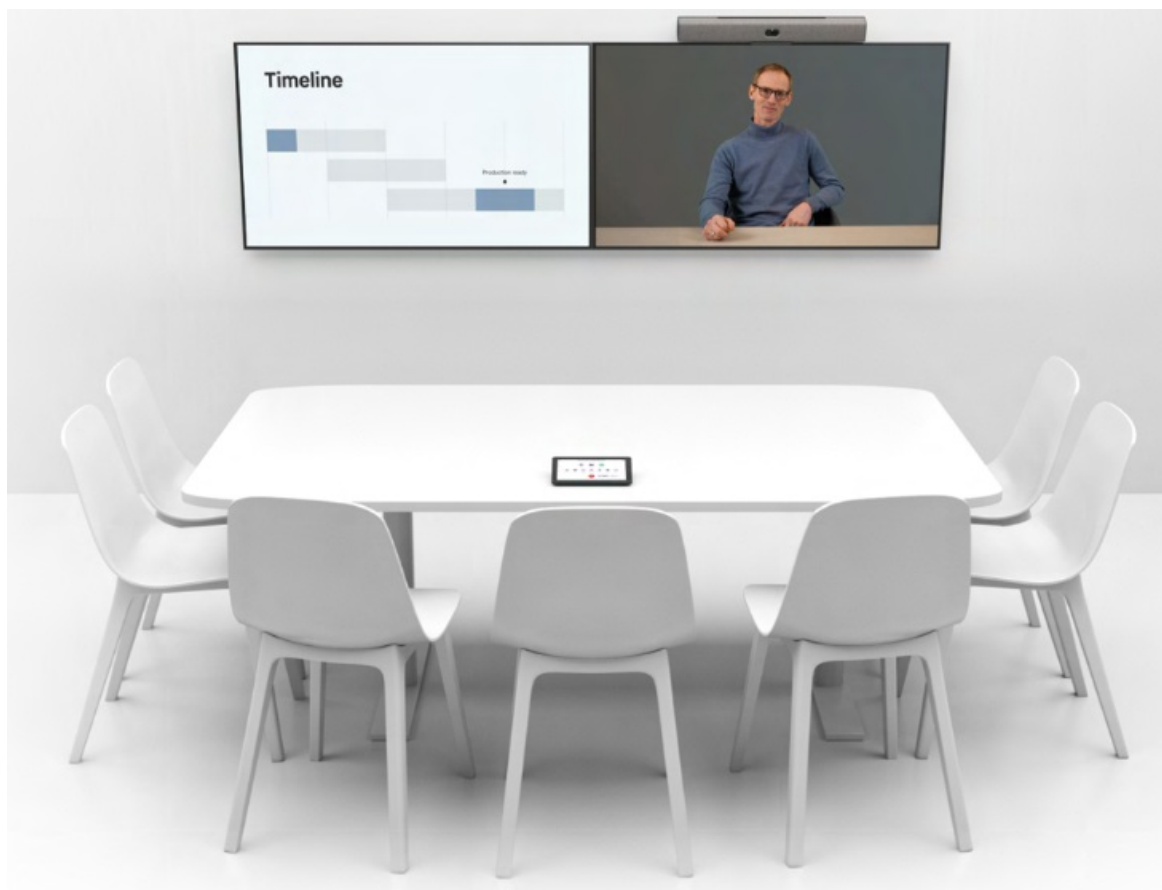


Wall mount

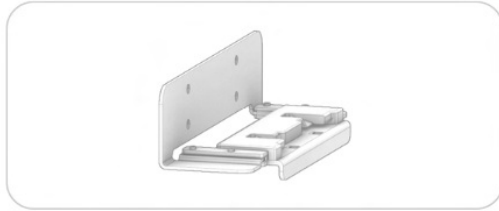


Screen mount Sold separately



Table stand

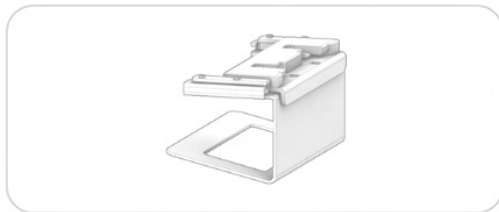

Snap-on mount

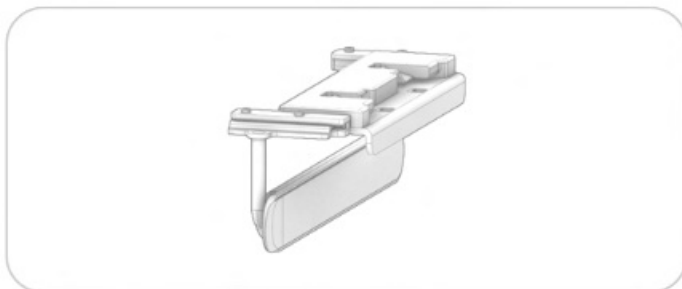

Neat Bar comes with everything you need to get started, including cables, wall mount, table stand and snap-on mount.


In the box

- Neat Bar: Video conferencing device
- HDMI cable: 6.5ft (2m)
- Ethernet cable: 9.8ft (3m)
- Power cord: 9.8ft (3m) Mount adapter, wall mount, table stand and snap-on mount

Screen mount sold separately

- 4 × M8 screw (0.94 in / 24 mm) for VESA mount
- 4 × M6 screw (0.94 in / 24 mm) for VESA mount
- 2 × spacer (to secure parallel TV mount)
- 1 × 2 mm hex key for the mount adapter

- 1 × 5 mm hex key for the screen mount
- 1 additional screw bag for dual screen setup
- 4 × M8 screw (0.94 in / 24 mm) for VESA mount
- 4 × M6 screw (0.94 in / 24 mm) for VESA mount
- 4 × spacer (to secure alignment of all screens)

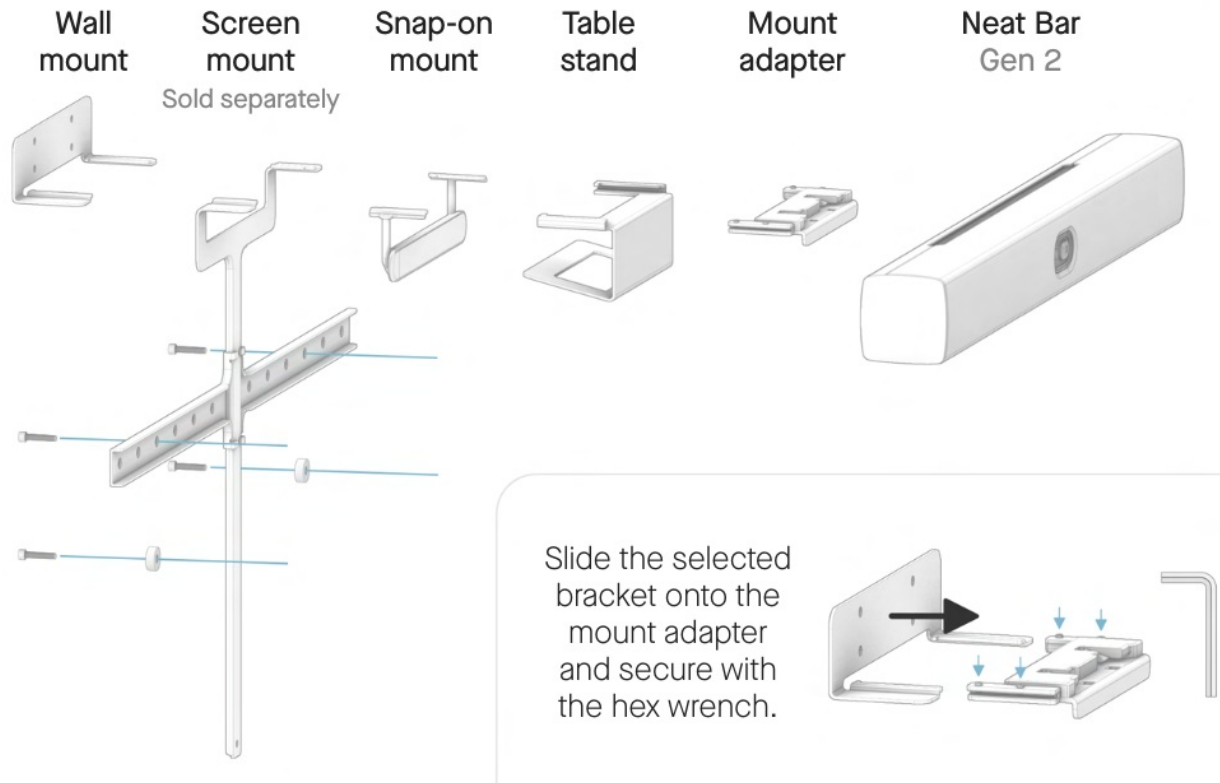

Screws for mounting to the wall are not included. Mounting on a wall should only be performed by qualified personnel in line with applicable facility and state regulations. The wall and the mounting equipment must safely withstand the load of the product.

Neat Pad works as a Controller for Neat Bar and can also be configured as a Scheduling Display for the Meeting Room. It comes with everything you need to get started, including cables and mounting options.

In the box




- Neat Pad: 8-inch touch screen
- 2 × Ethernet cable: 9.8ft (3m) + 16.4ft (5m)

PoE power adapter

Mount adapter, side mount and wall mount

Glass mount sold separately

- 4 × M4 screw (0.30 in / 7.5 mm) for the mount adapter
- 3 × M4 screw (0.19 in / 4.7 mm) for the side mount
- 1 × 2.5 mm hex key for the mounts
- 1 × 2 mm hex key to secure Neat Pad to the wall mount

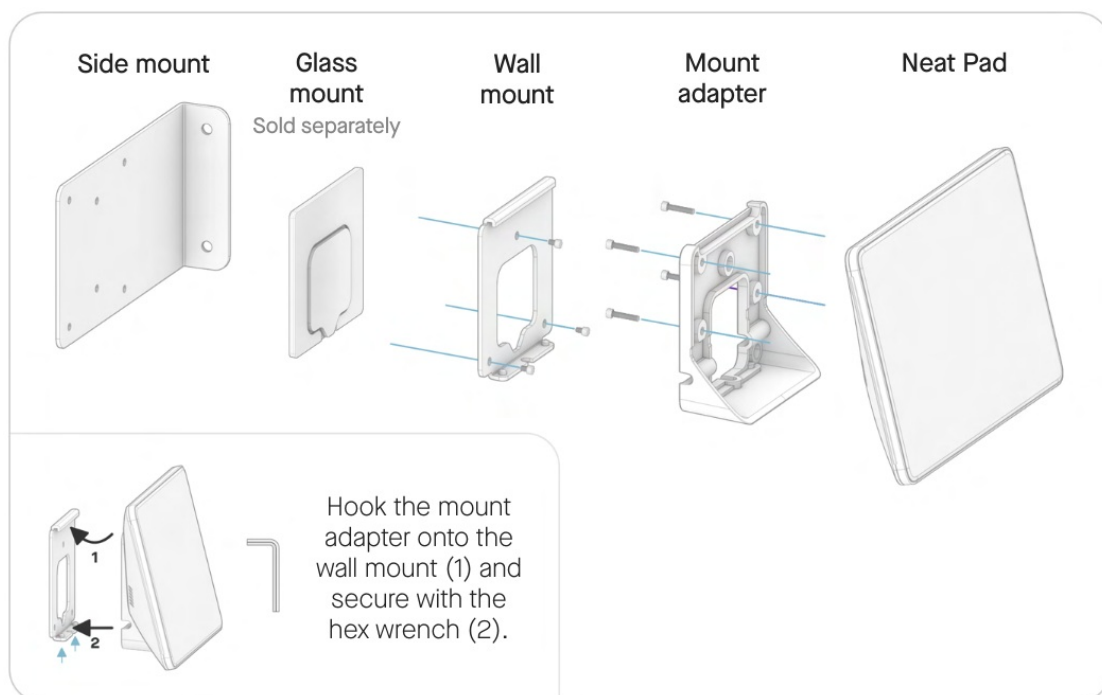


Screws for mounting to the wall are not included. Mounting on a wall should only be performed by qualified personnel in line with applicable facility and state regulations. The wall and the mounting equipment must safely withstand the load of the product. Glass mount must be mounted less than 6,56 ft (2 m) above floor.

Mounting & releasing


Mounting

Slide Neat Bar onto the selected mounting option (1). When fully inserted tilt Neat Bar back to horizontal and check if it is secure by carefully pulling it towards you.

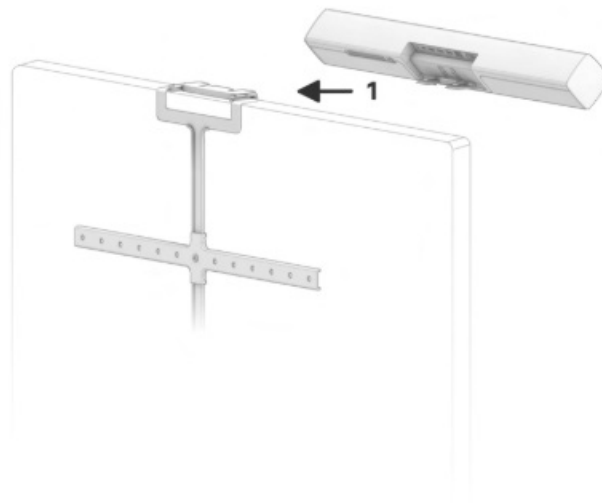

Releasing

Tilt Neat Bar fully forward (1). Pull towards you (2) until the unit stops and the red release lever appears (3). Push the release lever up and pull Neat Bar gently off the mount adapter.

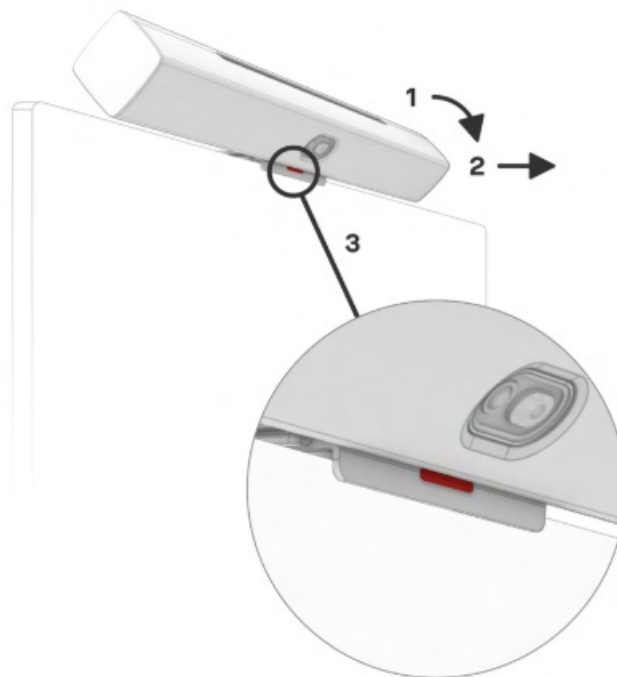


Size & weight

Neat Bar Gen 2


- **Width:** 25.59 in (650 mm)
- **Height:** 2.76 in (70 mm)
- **Depth:** 2.76 in (70 mm)

- **Weight:** 3.44 pounds (1,56 kg)

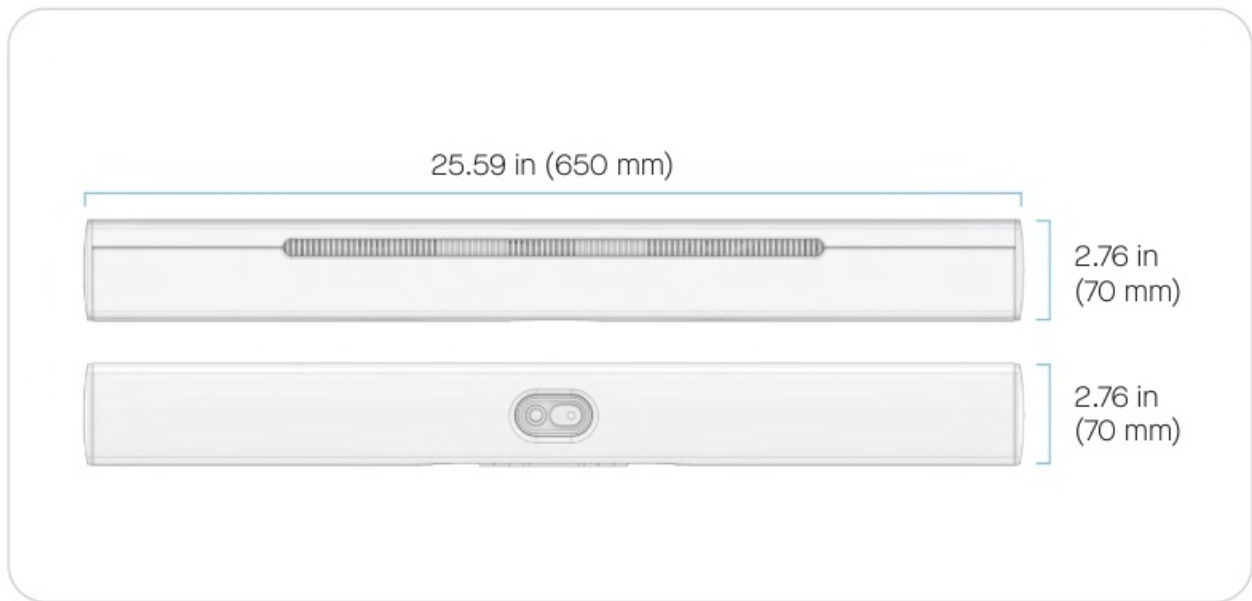

Neat Pad

- **Width:** 7.8 in (198 mm)
- **Height:** 1.7 in (42 mm)
- **Depth:** 5 in (127 mm)
- **Weight:** 1.15 pounds (520 g)

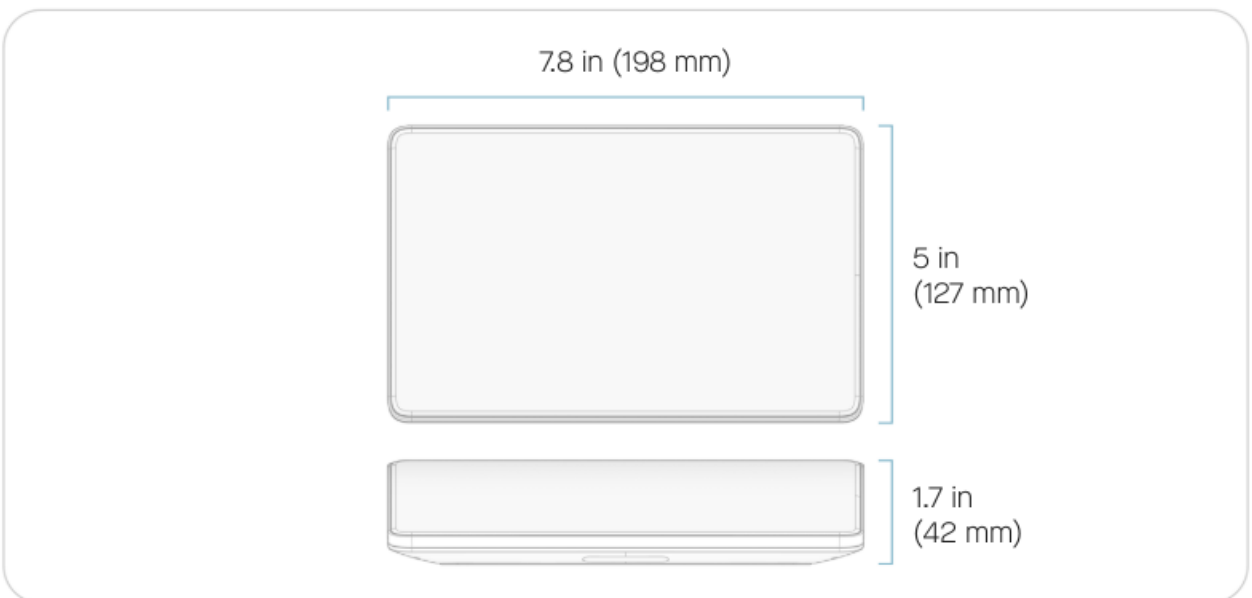

Setup & connectivity

Setup


Use the provided cables to set up Neat Bar.
Connect the cables according to the illustration.

Cables marked  are included. Cables marked  are optional and not required for basic use of the system.

Requirements for a complete setup

Display

Internet connection Video service

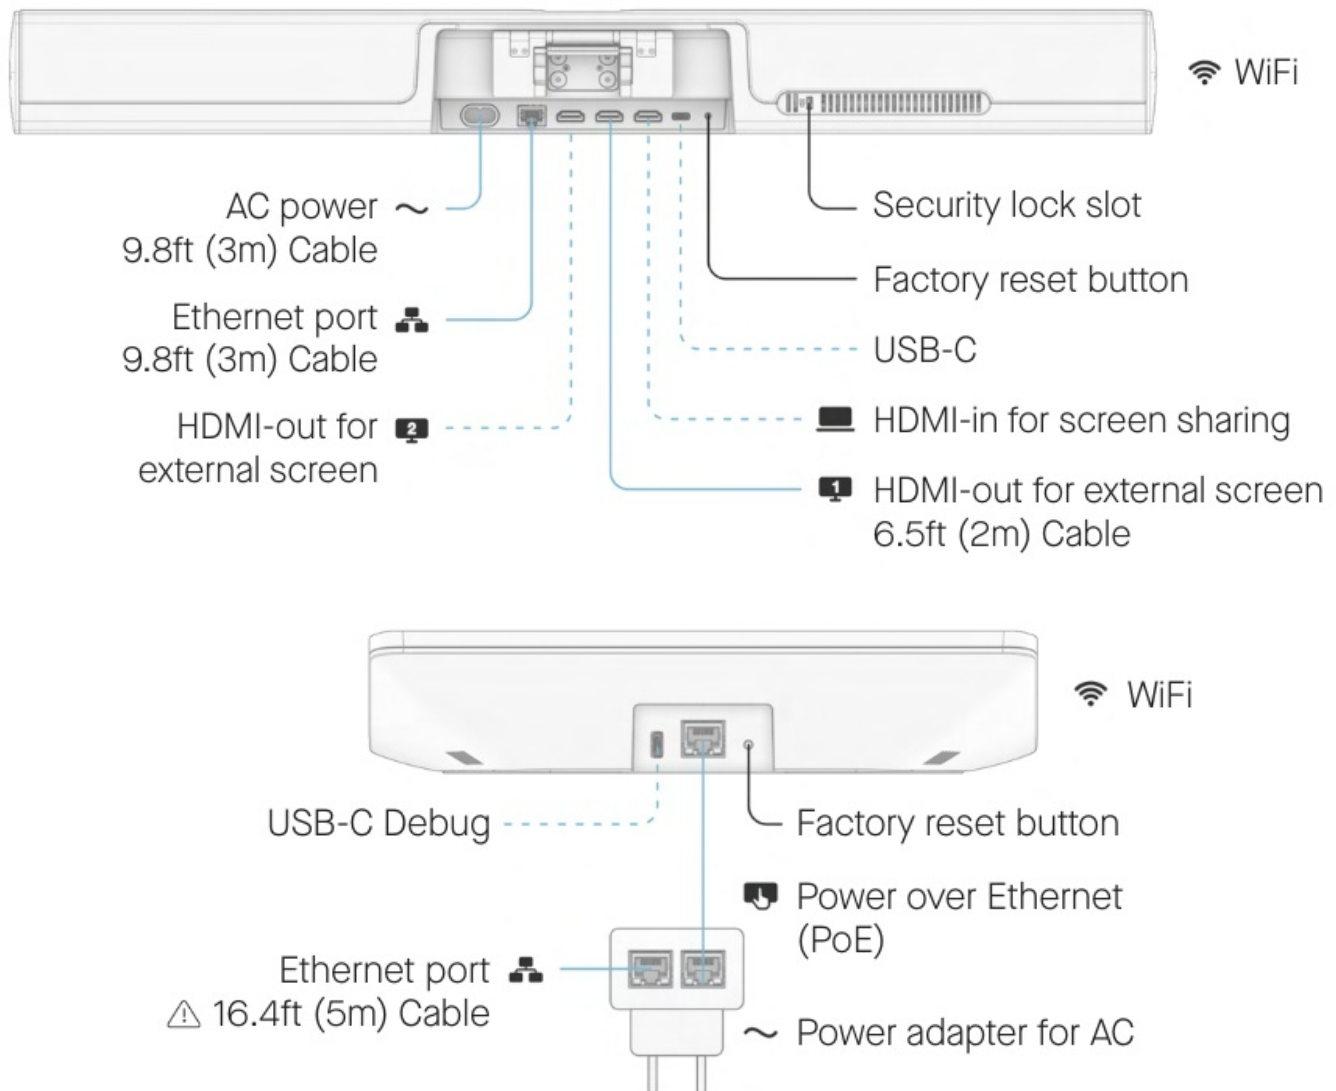

The 16.4ft (5m) Ethernet Cable provided is not to be used for in-wall installation. In-wall cable routing should only be performed by qualified personnel using appropriate equipment.

Environmental Requirements


- **Ambient operating temperature:** 32° to 95° F (0° – 35° C)
- **Storage temperature:** -4° – 140° F (-20° – 60° C)
- **Relative humidity:** 10% to 90%
- **Network standby:** <8W (after 20 minutes)

Additional Product Information

<https://neat.no/bar-2>

Neat Bar (Gen 2) and Neat Pad – User Manual rev03

Documents / Resources

 A photograph of the Neat Bar and Neat Pad video conferencing setup. The Neat Bar is a horizontal device mounted on a wall, displaying a video call with two participants. Below it is the Neat Pad, a small tablet on a stand. The background is a plain wall. Text at the top left of the image reads 'Neat Bar & Neat Pad Generation 2'. The Neat logo is at the bottom left.	<p>neat Gen 2 Neat Bar Video Conferencing Device [pdf] User Manual</p> <p>Gen 2 Neat Bar Video Conferencing Device, Gen 2, Neat Bar Video Conferencing Device, Bar Video Conferencing Device, Video Conferencing Device, Conferencing Device, Device</p>
---	--

References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.