



NEMO MINIFLUX OPAL Modular LED System User Guide

[Home](#) » [NEMO](#) » NEMO MINIFLUX OPAL Modular LED System User Guide 

Contents

- [1 NEMO MINIFLUX OPAL Modular LED System](#)
- [2 ABOUT](#)
- [3 1M | 3000K](#)
- [4 1M | 4000K](#)
- [5 2M | 3000K](#)
- [6 2M | 4000K](#)
- [7 Documents / Resources](#)
 - [7.1 References](#)
- [8 Related Posts](#)

NEMO

NEMO MINIFLUX OPAL Modular LED System




ABOUT

- MINI FLUX is a modular LED system for indoor/outdoor suitable for cornice, decorative and accent lighting.

- High-emission LED strip (24V DC) installed in an aluminum profile.
- Opal polycarbonate diffuser for a homogenous emission of light.
- Installation is realized through transparent polycarbonate clips that are adjusted for the customer's needs.
- Miniflux can be supplied in numerous lengths and colour temperatures.
- LED driver not included.

1M | 3000K

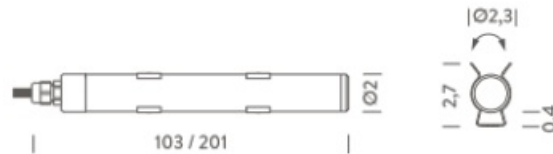


LAMPING

- Source Linear LED
- Total power 15W
- Emission Diffused orientable
- Switching according to driver
- Tension 24VDC
- Color temperature 3000K
- Luminous flux 905lm
- Initial luminaire efficacy 60lm/W
- Initial chromaticity SDCM < 3
- Typ CRI 97
- IP class 65
- Dimensions ø2x103cm
- Materials Polycarbonate
- Ambient temperature range – 20°C / 50°
- Performance ambient temperature 25°
- Mechanical impact protection code IK08
- Notes cable 2m; driver not included
- Customization options LED colour temperature, tube length, 1-10V, DALI, DMX, Casambi
- Accessories Connectors kit IP68, | Drivers 24VDC + DALI interface,
- Net lamp weight 0,30 kg
- Codes Structure
- BBOK0910G26WPO opal white

PACKAGE

Package 01 Dimension: 120x8,5x4 cm / Gross weight: 0,40 kg

1M | 4000K

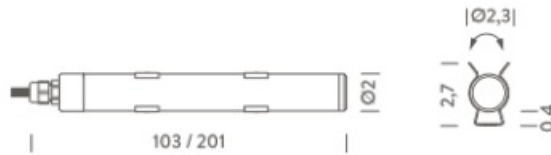


LAMPING

- Source Linear LED
- Total power 15W
- Emission Diffused orientable
- Switching according to driver
- Tension 24VDC
- Color temperature 4000K
- Luminous flux 905lm
- Initial luminaire efficacy 60lm/W
- Initial chromaticity SDCM < 3
- Typ CRI 94
- IP class 65
- Dimensions ø2x103cm
- Materials Polycarbonate
- Ambient temperature range – 20°C / 35°
- Performance ambient temperature 25°
- Mechanical impact protection code IK08
- Notes cable 2m; driver not included
- Customization options LED colour temperature, tube length, 1-10V, DALI, DMX, Casambi
- Accessories Connectors kit IP68, | Drivers 24VDC + DALI interface,
- Net lamp weight 0,30 kg
- Codes Structure
- BBOK0910G26NPO opal white

PACKAGE

Package 01 Dimension: 120×8,5×4 cm / Gross weight: 0,40 kg

2M | 3000K

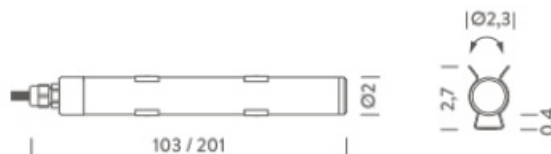

LAMPING


- Source Linear LED
- Total power 30W

- Emission Diffused orientable
- Switching according to driver
- Tension 24VDC
- Color temperature 3000K
- Luminous flux 1800lm
- Initial luminaire efficacy 60lm/W
- Initial chromaticity SDCM < 3
- Typ CRI 97
- IP class 65
- Dimensions ø2x201cm
- Materials Polycarbonate
- Ambient temperature range – 20°C / 50°
- Performance ambient temperature 25°
- Mechanical impact protection code IK08
- Notes cable 2m; driver not included
- Customization options LED colour temperature, tube length, 1-10V, DALI, DMX, Casambi
- Accessories Connectors kit IP68, | Drivers 24VDC + DALI interface,
- Net lamp weight 0,60 kg
- Codes Structure
- BBOK0920G26WPO opal white

PACKAGE

Package 01 Dimension: 220×8,5×4 cm / Gross weight: 0,72 kg

2M | 4000K

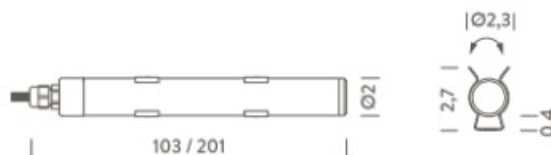

LAMPING

- Source Linear LED
- Total power 30W
- Emission Diffused orientable
- Switching according to driver
- Tension 24VDC
- Color temperature 4000K
- Luminous flux 1800lm
- Initial luminaire efficacy 60lm/W
- Initial chromaticity SDCM < 3
- Typ CRI 94
- IP class 65

- Dimensions ø2x201cm
- Materials Polycarbonate
- Ambient temperature range – 20°C / 35°
- Performance ambient temperature 25°
- Mechanical impact protection code IK08
- Notes cable 2m; driver not included
- Customization options LED colour temperature, tube length, 1-10V, DALI, DMX, Casambi
- Accessories Connectors kit IP68, | Drivers 24VDC + DALI interface,
- Net lamp weight 0,60 kg
- Codes Structure
- BBOK0920G26NPO opal white

PACKAGE

Package 01 Dimension: 220×8,5×4 cm / Gross weight: 0,72 kg

www.nemolighting.com

Documents / Resources

 MINIFLUX OPAL MINIFLUX OPAL is a modular LED system that can be used in a variety of applications. It is a compact, lightweight, and easy to install system that can be used in a variety of applications. It is a compact, lightweight, and easy to install system that can be used in a variety of applications.	NEMO MINIFLUX OPAL Modular LED System [pdf] User Guide MINIFLUX OPAL Modular LED System, MINIFLUX OPAL, MINIFLUX LED System, OPAL LED System, Modular LED System, LED System, Modular LED
---	---

References

- NEMO [NEMO LIGHTING USA](#)