

Nero NRFW006 Square Tile Insert Floor Waste Instructions

Home » Nero » Nero NRFW006 Square Tile Insert Floor Waste Instructions

Contents

- 1 Nero NRFW006 Square Tile Insert Floor
- **2 Product Usage Instructions**
- 3 FAQ
- 4 Drawing
- **5 Specifications**
- 6 Packaging Includes
- 7 Finish
- **8 Installation Instruction**
- 9 Documents / Resources
 - 9.1 References
- **10 Related Posts**



Nero NRFW006 Square Tile Insert Floor Waste



Product Specifications

• Product Name: 100mm Square Tile Insert Floor Waste

• Outlet Size: 50mm

Material: 304 Stainless SteelLive Load Bearing: 100KG

Product Usage Instructions

Installation

The installation of the 100mm Square Tile Insert Floor Waste with a 50mm outlet should be done in compliance with the National Construction Code Volume, Plumbing Code of Australia (PCA), associated reference standards, and WMTS040.

Floor Waste Width Spiggot Size:

- 100mm
- 50mm

Nominal OD Floor Waste Pipe: 50mm PVC

Notes:

1. The nominal OD aligns with the floor waste pipe.


Steps:

- 1. Cut the grate to suit the floor waste, leaving at least 3mm of clearance in overall length to allow for easy removal for cleaning.
- 2. Install the floor waste according to the provided picture. It can be installed in two ways: tile insert placement and normal placement.

FAQ

- Q: Can the floor waste be installed in other sizes?
 - A: The product is specifically designed for a 100mm square tile insert floor waste with a 50mm outlet.
 Other sizes may not be compatible.
- Q: What is the material of the product?
 - A: The product is made of 304 Stainless Steel, ensuring durability and longevity.

Drawing

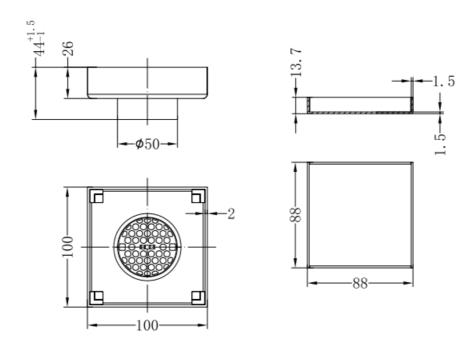

Specifications

- SKU
 - NRFW006
- Watermark License
 - WM-032203

Packaging Includes

• 1x floor waste

Finish













Installation Instruction

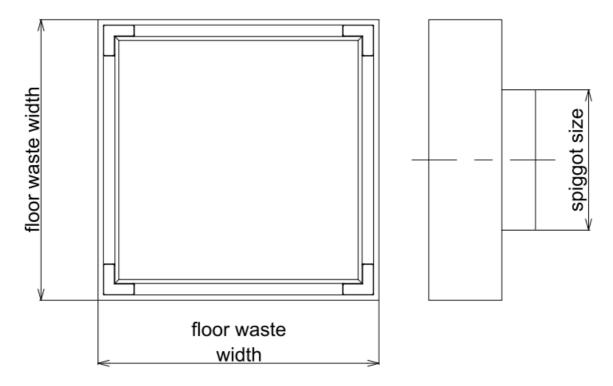

Floor Waste Width	Spiggot Size	Nominal OD Floor Waste Pipe
100mm	50mm	50mm PVC

- The installation of this Shower Grate is subject to the requirement of National
- Construction Code Volume. The Plumbing Code of Australia (PCA), associated reference standards as applicable at the time and WMTS040.
- The Maximum live load bearing is 100KG.

Notes

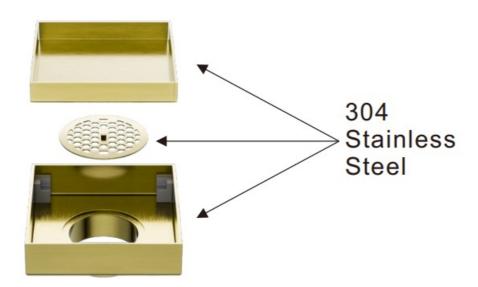









 Cut grate to suit floor waste allowing at least 3mm of clearance in overall length to facilitate removal for cleaning.

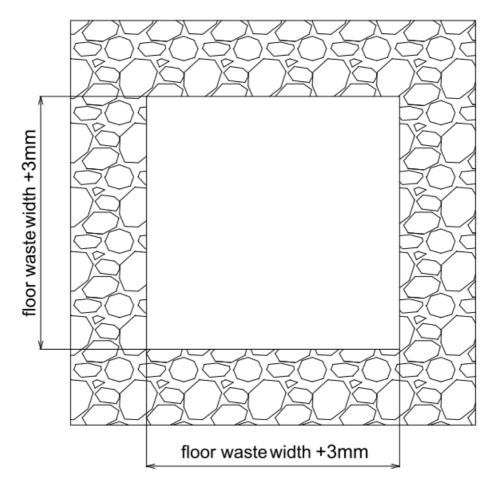

• Install floor waste as above picture. Note: it can be installed 2 ways: tile insert placement and normal placement.

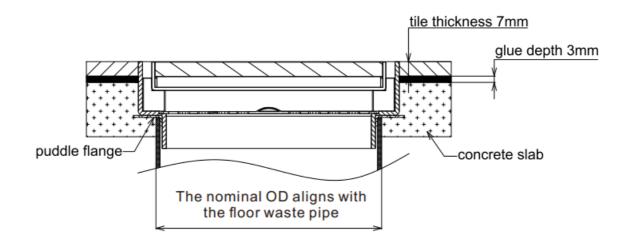

• www.nerotapware.com.au

Documents / Resources



Nero NRFW006 Square Tile Insert Floor Waste [pdf] Instructions
NRFW006, NRFW008, NRFW006 Square Tile Insert Floor Waste, NRFW006, Square Tile Insert Floor Waste, Tile Insert Floor Waste, Floor Waste, Waste

References

• User Manual

Manuals+, Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.