



# NEXCOM Neu-X60 Integral System Instruction Manual

[Home](#) » [NEXCOM](#) » NEXCOM Neu-X60 Integral System Instruction Manual 



**Neu-X60**  
**Edge Computing System**  
**Powered by Intel Alder**  
**Lake N50 Processor**



## Contents

- [1 Neu-X60 Integral System](#)
- [2 Product Overview](#)
- [3 Specifications](#)
- [4 Dimension Drawing](#)
- [5 Documents / Resources](#)
  - [5.1 References](#)

## Neu-X60 Integral System

### Main Features

- Intel® Processor N50
- Small footprint in Palm size

- Pre-installed 4G memory
- Pre-installed 64G M.2 storage
- Support 1x Intel I226-V 2.5GbE LAN
- 1x HDMI, 1x RS232/422/485, 2x USB3.2
- 1x miniPCIe full size for optional wireless module
- Great value for indoor applications

## Product Overview

Neu-X60 is powered by Intel® processor N50 processor with with low-power, highly efficient performance designed. Neu-X60 is ideal for edge computing application with limited space or low-power-consumption designs. It supports 1x HDMI display, 1x 2.5GbE LAN port, 2x USB3.2, and 1x RS232/RS422/ RS485 interface. Also pre-installed 4GB memory and 64GB M.2 storage in system. The Neu-X60 is well-suited for applications that needs a simple but dependable controller.

The palm-sized fanless edge computing system is dedicated to digital signage, industrial controller system, IOT gateway, self-service kiosks, indoor application and retail equipment.

## Specifications

### CPU Support

- Intel® Processor N50 (up to 3.4 GHz, TDP 6W)

### Graphic

- Intel® UHD Graphics 750 MHz

### Main Memory

- 1 x SO-DIMM socket, supports up to 16GB DDR4 3200MHz, non-ECC and un-buffered memory
- Pre-installed with one 4G DDR4 memory in system

### I/O Interface-Front

- 1 x 12V DC Jack, lockable design
- 1 x HDD Active LED
- 1 x Power button with LED
- 1 x RJ45 with LED for 2.5GbE LAN
- 2 x USB3.2
- 1 x HDMI1.4
- 1 x DB9 RS232/422/485

### I/O Interface-Rear

- 2 x Antenna hole

## Internal I/O

- 2 x 5-pin header for two USB 2.0 ports

## Expansion

- 1x Full size miniPCIe slot with nano sim slot onboard, support optional WiFi / BT/ 4G module

## Storage

- 1x M.2 Key M 2242 storage, supports both SATA & PCIe signals
- Pre-installed with one M.2 Key M 64G SSD in system


## Power Supply

- +12V DC Input
- One AC/DC 12V/5A, 50W power adapter in accessory

## Environment

- Operating temperature: 0°C to 40°C ambient with 0.7m/s air flow
- Relative humidity: 10% to 95% (non-condensing)
- Vibration protection:
  - Random: 2 Grms @ 5~500 Hz, IEC60068-2-64
  - Sinusoidal: 2G @ 5~500 Hz, IEC60068-2-6

## Dimension Drawing

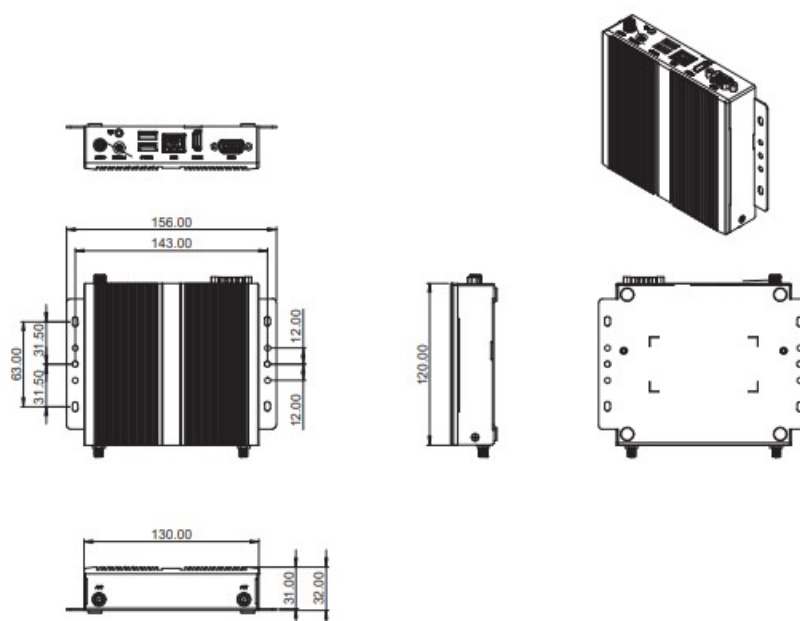

## Dimensions

- System dimension: 156mm (L) x 119.6mm (W) x 31mm (H) (With bracket)
- System weight: 0.0553 kg
- Package dimension: 230x215x115mm
- Package weight: 1.15Kg

#### Operating System

- Win10 64-bit
- Linu x 4.1

#### Ordering Information

- Neu-X60 (P/N: 10W100X6000X0) Intel® N50 processor, Palm-sized Fanless Edge Computing System

We reserve the right to change specifications and product descriptions at any time without prior notice.



Last update: 03/22/2024  
Edge Computing System  
[www.nexcom.com](http://www.nexcom.com)

#### Documents / Resources

A thumbnail image of the instruction manual cover for the NEXCOM Neu-X60 Integral System. The cover is white with a blue header and footer. It features a photograph of the device and some text.	<p><a href="#">NEXCOM Neu-X60 Integral System</a> [pdf] Instruction Manual Neu-X60 Integral System, Neu-X60, Integral System</p>
---	--

#### References

- [NEXCOM International Co., LTD.](#)
- [User Manual](#)

#### Manuals+, Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.