

# niko 226-56102 Rocker Onefold Faceplate for Double Switch Functions Instructions


## Contents

- [1 Onefold faceplate, for double switch functions, Niko Rocker alu blue grey brushed](#)
  - [1.1 226-56102](#)
    - [1.1.1 Technical data](#)
- [2 Documents / Resources](#)
  - [2.1 References](#)
- [3 Related Posts](#)

## Onefold faceplate, for double switch functions, Niko Rocker alu blue grey brushed

226-56102

4 year warranty

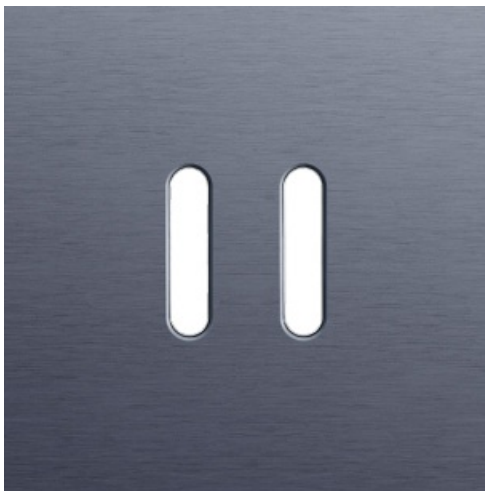

The Niko Rocker onefold faceplate for a double switch clicks onto a single installed double switch function. The faceplate combines with any available Niko Rocker for double switch functions. It consists of an upper frame, light guide and lower frame that are mechanically interconnected. The light guide is made of a translucent plastic and transports the light from the optional LED to the lever. The upper frame is made of anodised aluminium (alu grey). The lower frame is made of dark grey polycarbonate (PC) + acrylic-styrene-acrylate (ASA), blue grey coated. The upper frame is 6 mm thick and the lower frame 2 mm. Niko recommends a design combination with the Niko Rocker in the following colour: alu blue grey.

### Technical data

Onefold faceplate, for double switch functions, Niko Rocker alu blue grey brushed.

- Simple faceplate for one switch.
- Colour: alu blue grey (approximately NCS S 8005 – R80B, RAL 240 30 05)

- Recommended colour central plate: alu blue grey
- Frame composition: It consists of an upper frame, light guide and lower frame that are mechanically interconnected.
- Material upperframe: The upperframe is made of anodised aluminium (alu grey).
- Material lower frame: The lower frame is made of dark grey polycarbonate (PC) + acrylic-styrene-acrylate (ASA), blue grey coated
- Frame thickness: The upper frame is 6 mm thick and the lower frame 2 mm.
- Lighting element
  - the faceplate is fitted with a light guide
  - the light guide is made of a translucent plastic
  - the light guide transports the light from the optional LED to the lever
  - please note that the faceplate should not be mounted upside down to ensure that the optional LED fits nicely with the light guide
- Surface-mounting height: max. 8.5 mm
- Fire safety
  - self-extinguishing: complies with a filament test of 650°C
  - halogen-free
- Protection degree: IP41 for the combination of a mechanism, central plate and faceplate
- Impact resistance: The combination of a mechanism, a central plate and a faceplate has an impact-resistance of IK06
- Dimensions (HxWxD): 83 x 83 x 13 mm
- Dimensions visible (HxWxD): 83 x 83 x 8 mm
- Marking: CE




[www.niko.eu](http://www.niko.eu)

**niko**

226-56102 – 13-04-2024

---

**Documents / Resources**

	<p><a href="#">niko 226-56102 Rocker Onefold Faceplate for Double Switch Functions</a> [pdf] Instructions 226-56102 Rocker Onefold Faceplate for Double Switch Functions, 226-56102, Rocker Onefold Faceplate for Double Switch Functions, Onefold Faceplate for Double Switch Functions, Faceplate for Double Switch Functions, Double Switch Functions, Switch Functions, Functions</p>
--	---

References

- [n Niko - home automation, switches, socket outlets and detector](#)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.