

Nilight 18004C-A LED Light Bar Set User Manual

Home » Nilight » Nilight 18004C-A LED Light Bar Set User Manual

Contents


- 1 Nilight 18004C-A LED Light Bar Set
- U
- 2 installation
- 3 Documents / Resources
 - 3.1 References
- **4 Related Posts**



Nilight 18004C-A LED Light Bar Set U



installation

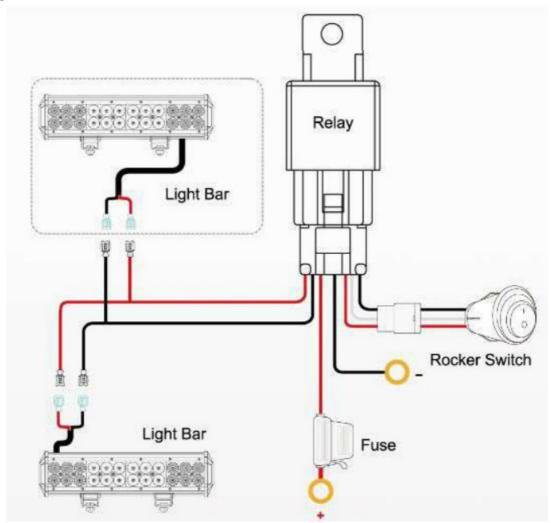

- 1. Connect light bar wires to wiring harness terminals respectively, black to black, red to red.
- 2. Connect the wiring harness to the car battery. Red wire (+) with fuse to positive, black wire(-) to negative
- 3. Turn on the power and press the switch on/off to test the light.

Caution:

- The operating voltage is 12V DC: 16AWG: Max. Wattage 180W/ 14AWG: Max. Wattage 300W /12AWG: Max. Wattage 450W
- 2. Please make sure all the exposed wires were securely wrapped by electrical insulating tape to prevent short circuits.
- 3. Please strictly follow the instructions to avoid any hazards. If you do not feel comfortable with the installation we recommend having a professional to install or install under his guidance.

Need Help?



If you're having an issue with the product or need technical support, Nilight team is always here to help and make sure you are 100% satisfied.

Scan the QR code to contact us



nilight.com/pages/contact

Documents / Resources



Nilight 18004C-A LED Light Bar Set [pdf] User Manual 18004C-A LED Light Bar Set, 18004C-A, LED Light Bar Set, Bar Set

References

User Manual