


NSW Nodestream Windows Application User Guide

[Home](#) » [NODESTREAM](#) » NSW Nodestream Windows Application User Guide 

NSW Nodestream Windows Application User Guide

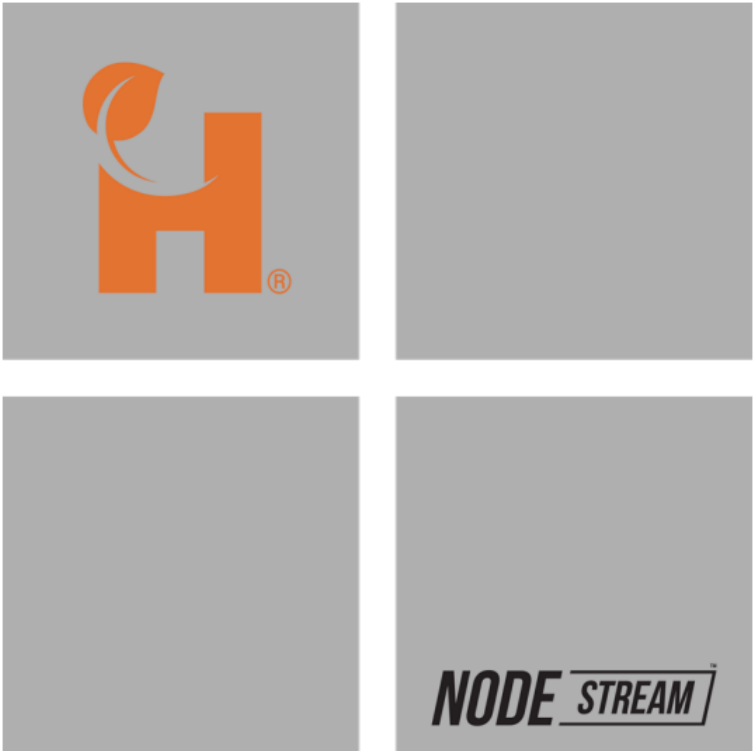

Contents

- 1 [Getting Started](#)
- 2 [Welcome](#)
- 3 [Installation](#)
- 4 [Server Configuration](#)
- 5 [Login](#)
- 6 [Sign Up](#)
- 7 [Account Activation](#)
- 8 [System Overview](#)
- 9 [Contacts Manager](#)
- 10 [Control Canvas](#)
- 11 [NSData](#)
- 12 [Configure a Data Channel](#)
- 13 [Setting Definitions](#)
- 14 [Network & Support](#)
- 15 [Firewall Settings](#)
- 16 [Support](#)
- 17 [Troubleshooting](#)
- 18 [Documents / Resources](#)
 - 18.1 [References](#)
- 19 [Related Posts](#)

Getting Started

Welcome


Welcome to the Nodestream Windows application. This application provides control of your Nodestream ecosystem and allows streaming of video, audio and/or data to or from another Nodestream device.

System Requirements

Please ensure your system meets or exceeds the below system requirements:

	Minimum Requirements	Recommended Requirements
Operating System	Windows® 10 64-bit Build 1809	Windows® 10 64-bit Build 1904 or later
Processor	10th Gen Intel® Core™ i3 @ 2.1GHz	10th Gen Intel® Core™ i5 @ 2.4GHz
Video	Intel Integrated	Intel Integrated or Nvidia with Hardware Decode
Memory	8 GB RAM	8 GB RAM
Hard Drive Space	200 MB	200 MB

Installation

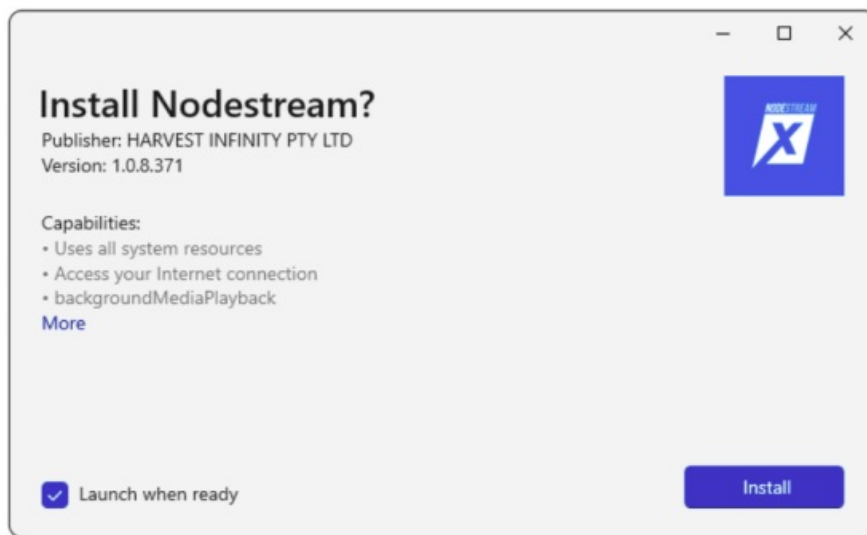

1. Run the Nodestream(version).msix installation file.
2. Deselect “Launch when ready” if you would not like the application to launch after installation.
3. Read through the capabilities list then click “Install” to proceed.
4. Once installation has completed, an icon will be available in your Windows start menu to run the application.

Server Configuration

Nodestream devices require connection to a server to manage connections and settings, you will need to enter the Server ID and key as provided by your organizations Nodestream Administrator.

Once configured, the server IP will be displayed



Contact Harvest support for further information@ support@harvest-tech.com.au

Login

Login

⚙️ Config

Email

✉️ Email

Password

🔒 Password

👁️

Login

☒ Remember Me

OR

New Here? Sign Up

Reset Password

If you already have an account, enter your login credentials to log in to the application.

When logging in for the first time, you will be required to create an account, click “New Here? Sign Up”.

Forgotten your password? Click “Reset Password”.

Need to change your Nodestream server details? Click the “Config” button.

Sign Up

Sign Up

First Name

Last Name

Date of Birth (optional)

Company (optional)

Position (optional)

Continue

Sign Up - Contact Details

Email

Contact Number

Password

Confirm Password

☐ I acknowledge that the email and contact number provided are correct as they are used for identifying user accounts.

☐ I have read and agree to the [Terms and Conditions](#).

Create Account


1. Enter your personal details, then click “Continue”.
2. Enter your contact details.
3. Check acknowledgment and agree to the Terms and Conditions.
4. Click “Create Account”.

Account Activation


Activate Your Account


Please enter a displayed name and software key to activate your account.

Displayed Name

 This is an alias or visible ID e.g. John Laptop

Software Key


 E.g. 1234-1234-1234-1234

 Please contact your administrator if you have not received a Software Key.


Activate Account

Once you have setup your account, you will need to activate your application.

1. Enter a Displayed Name.
2. Enter the software key provided to your organizations Nodestream Administrator.
3. Click “Activate Account”.

 Each software key can be used in multiple Nodestream applications; however, only one instance is allowed to be running at any given time when using the same key.

System Overview

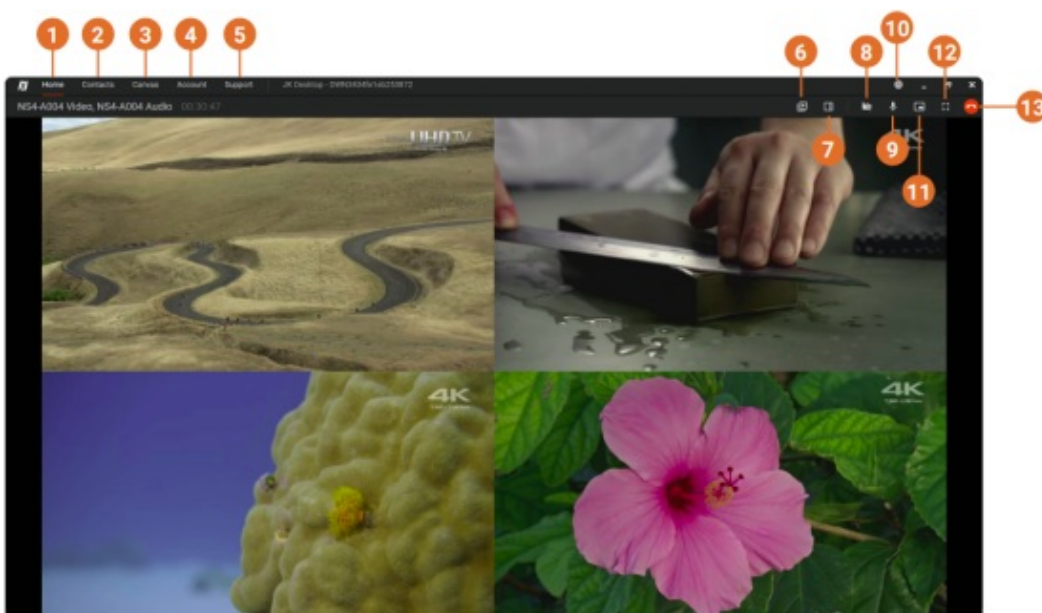

Streaming video from connected Nodestream Quad

1. Home “Stream View”

Displays video stream from a connected device.

2. Contacts Manager

Create/request a connection to another or multiple devices, manage favourites.

3. Control Canvas

Grouping and connection management of your Nodestream devices.

4. Account Settings

Go here to modify account attributes, security, preferences and logout

5. Support Help and support section-manuals & FAQ's

6. Snapshot

Takes a snapshot of the decoded video. Media output folder is configured in Account preferences.

7. Connection/Device Settings Panel

Manage settings for active video, audio or data connections.

8. Video Connection Status

On Video connection active.

9. Audio Connection Status

On Audio connection active (click to mute/unmute mic).

10. Server Connection Status

Solid Connected, Flashing = no connection to server or account details incorrect.

11. Picture in Picture

Opens the decoded video in a PIP window.


12. Full Screen

When streaming video, select to enter full screen mode

13. Disconnect Active Connections

Disconnects all active video, audio and data connections.

Contacts Manager

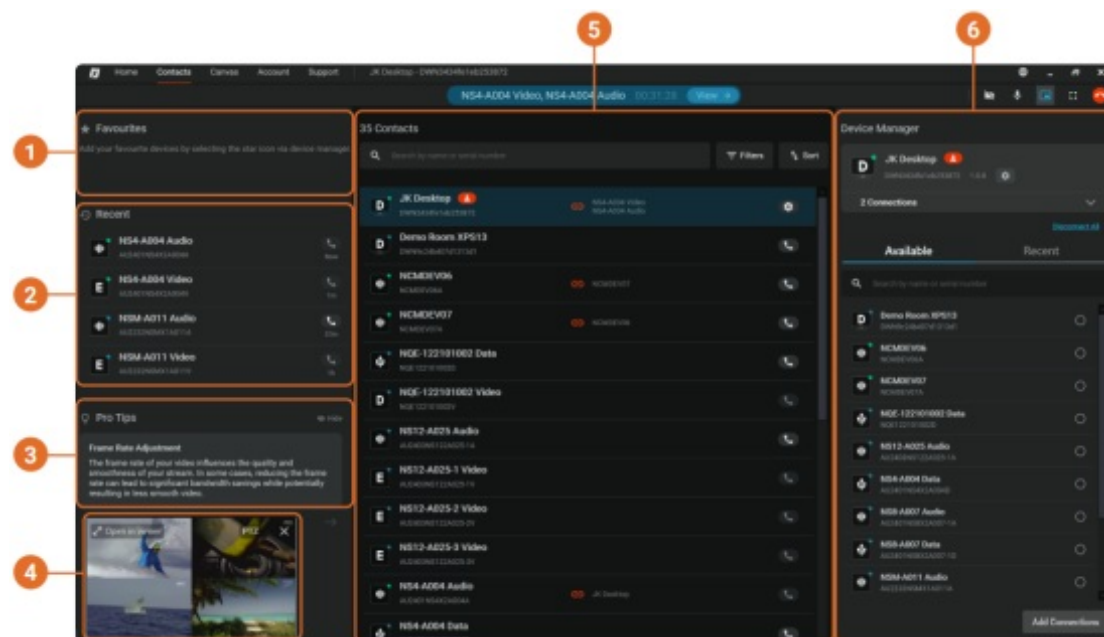

1. Favourites

You can add devices you contact often to this list. To add a device, select it from your contacts list and click on the star icon in the device manager section.

2. Recent

Displays a list of recently connected contacts for quick re-connection.

3. Pro Tips 3

Helpful tips to help achieve the best streaming experience

4. PIP Window

A preview/picture in picture view will be displayed if you have an active video stream.

5. Contacts

Displays a list of available contacts within your Nodestream group. Select the call icon associated with a device to make a connection.

Search: for when you know the name or serial of the device you would like to connect to.

Filter: select what type or status of device(s) you'd like to see.

Sort: sort devices by name, serial number or type.




Offline devices are not shown by default, enable them in filters to display.

6. Device Manager

Select a device to display active connections and compatible devices to connect to. To connect, select the devices then “Add Connection(s)”.

Manage device settings by clicking on the gear icon.

Control Canvas

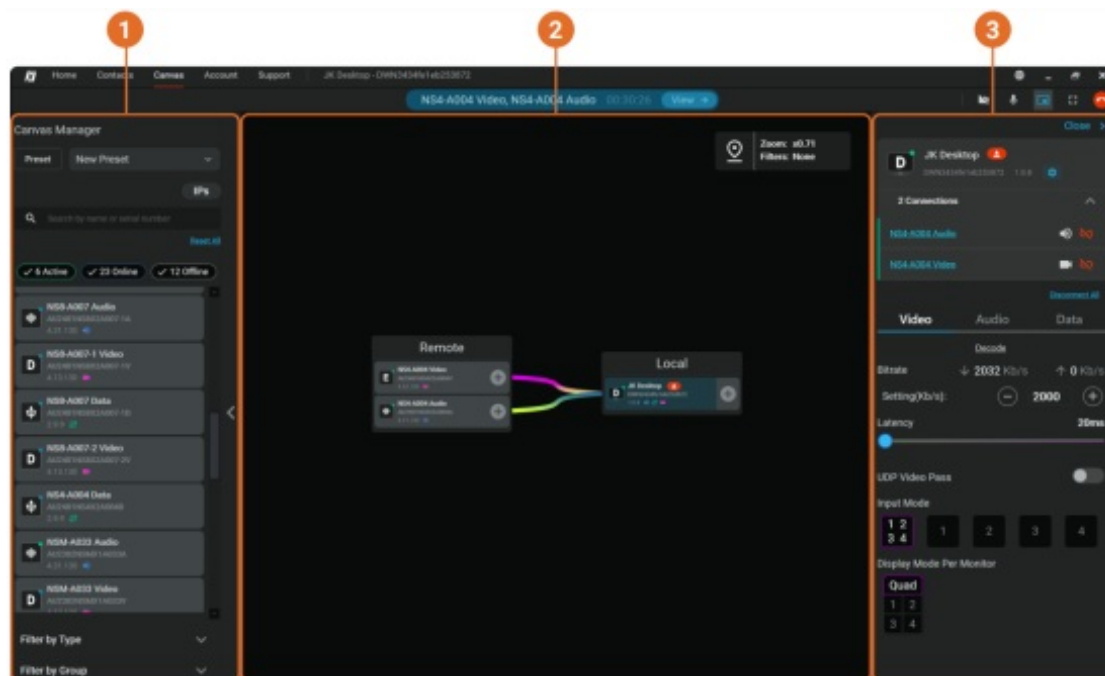

1. Unassigned Devices

A list of unassigned devices within your Nodestream group. Drag and drop devices of interest into groups on the connection canvas to visualise and manage connections.

Devices can be filtered by type, group or status.

2. Connection Canvas

When managing multiple connections across multiple groups or devices concurrently, the Connection Canvas

offers an intuitive visual interface to understand and manage device connections.

To establish a connection:

1. Click and drag the + icon of a device to another compatible device.
2. Release when the connection line is green to create the connection.



3. Device Manager

Select a device from the connection canvas to display and manage its active connections and manage settings.

NSData

NSData, built into the Nodestream Windows application, allows users to configure and connect up to 10 simultaneous channels of serial, TCP or UDP data between Nodestream devices.

This versatile function enables:

- Transaction of telemetry/sensor data to/from remote sites.
- Control of remote systems .
- Ability to access remote device web interfaces, e.g. IP camera, IOT device.
- Pass data from your Nodestream Decoder to a 3rd party device and/or local network device.



NSData should not be relied upon for critical control applications



Application Example

Configure a Data Channel

NSIXAVIERDEV01 Data
 NSIXAVIERDEV01D 2.9.4 ⚙️ ☆

0 Connections

Data

Bitrate ↓ 0 Kb/s ↑ 0 Kb/s

Latency 20ms

Forward Error Correction Off

Data I/O

Configured Channels: 0 Configure I/O

Configure I/O ✕

View Channels Configure Channel

Data on channel

0

0

1

2

will use

Protocol

serial

tcp

udp


1. From the Contacts Manager, select the Data Device you wish to configure then click the settings icon.
2. Click "Configure I/O". ⚙️
3. Click "Add New Channel" and select a channel from 0 to 9.
4. Select protocol, Serial, TCP or UDP.



NSData channels must match on both connected Nodestream devices to correctly pass data

Serial

1. Select your serial input or output device from the drop down menu.
2. Select the applicable Baud rate.
3. Click “Save” to confirm the channel

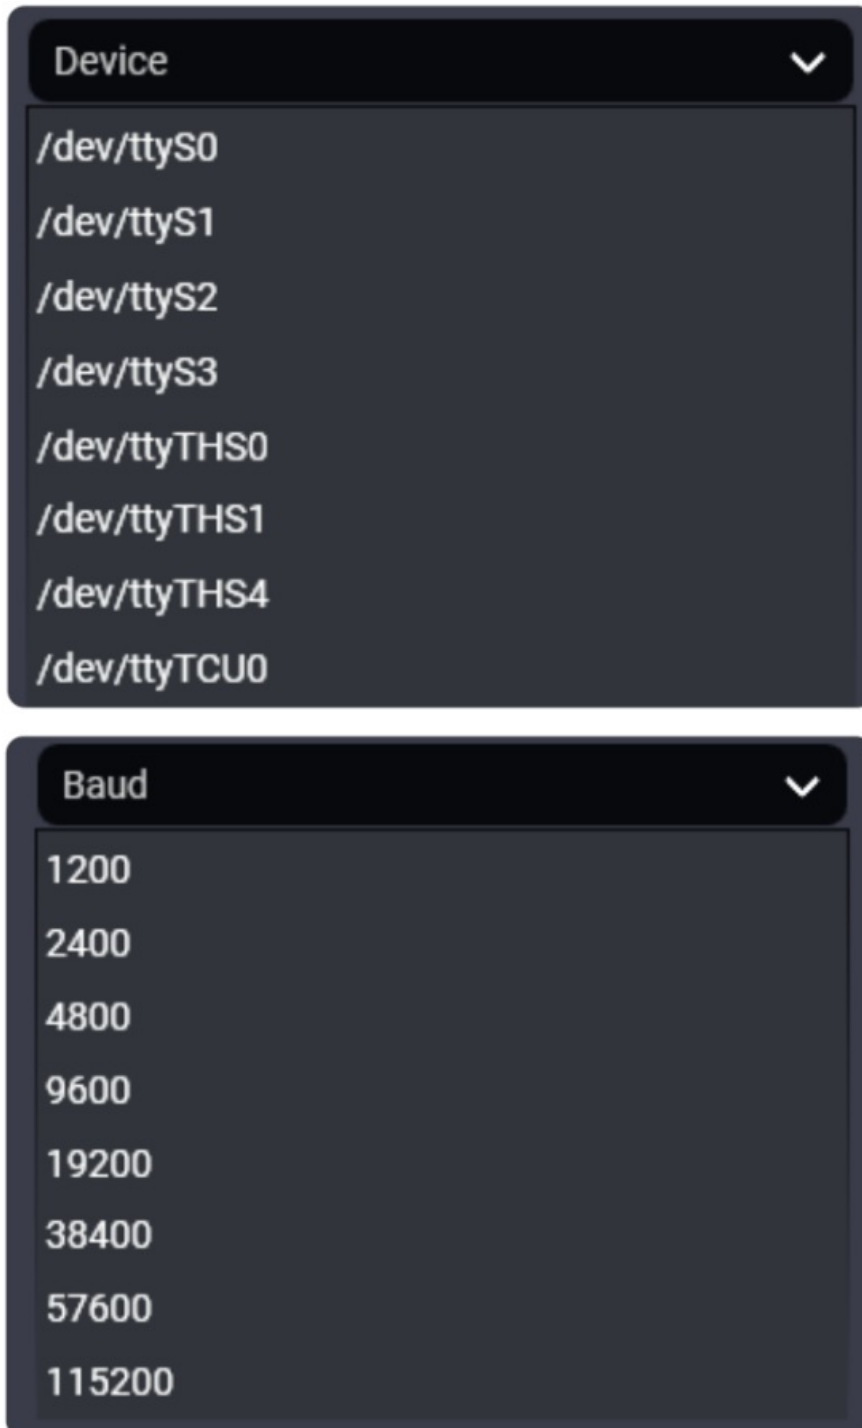

The image shows two dark-themed dropdown menus. The first menu is labeled 'Device' and contains a list of serial device paths: /dev/ttyS0, /dev/ttyS1, /dev/ttyS2, /dev/ttyS3, /dev/ttyTHS0, /dev/ttyTHS1, /dev/ttyTHS4, and /dev/ttyTCU0. The second menu is labeled 'Baud' and contains a list of baud rates: 1200, 2400, 4800, 9600, 19200, 38400, 57600, and 115200. Both menus have a white chevron icon in the top right corner of their header.

Device

- /dev/ttyS0
- /dev/ttyS1
- /dev/ttyS2
- /dev/ttyS3
- /dev/ttyTHS0
- /dev/ttyTHS1
- /dev/ttyTHS4
- /dev/ttyTCU0

Baud

- 1200
- 2400
- 4800
- 9600
- 19200
- 38400
- 57600
- 115200

TCP

1. Select mode.

Client – Remote device


1. Enter IP and Port of the TCP device you would like to connect to.

Server – Local device

2. Enter Port for local access of the remote TCP device via the IP of your Nodestream device.

2. Click “Save” to confirm the channel.

The image displays two screenshots of the Nodestream application's configuration interface. The top screenshot shows a 'client' configuration with a dropdown menu set to 'tcp', a 'Server Address' input field, and a 'Port' input field. The bottom screenshot shows a 'server' configuration with a dropdown menu set to 'tcp', a 'server' dropdown menu, and a 'Port' input field. Both interfaces have a dark theme.

-  When using the Windows Nodestream application, you can access the remote device from a browser @ 127.0.0.1:port.
- TCP can be used to create a “bridge” for connection to a remote IoT interface, i.e. Web configuration page, RTSP stream etc.

UDP


1. Enter “Output IP address” and “Port” (this is the device on your network, remote or local, that you would like to push data to)
2. Enter the “Listen Port” (this is the port that a device on your network is pushing UDP data to your Nodestream device, remote or local)
3. Click “Save” to confirm the channel.

udp

Output Address (zero = auto)

Output Port (zero = auto)

Listen Port

-  When using the Windows Nodestream application, you can access the UDP output @ 127.0.0.1:port.
- UDP can be used to transact data between a remote device to a local device, or output serial data from a remote location to a device on your network

Setting Definitions

Encoder

Input

Select from a list of available video sources what is to be streamed.

Frame Rate & Resolution

Adjust the frame rate and resolution of the selected input to achieve the desired output.

Higher = increased quality and more bandwidth requirement.

Lower = decreased quality and less bandwidth requirement.

For lower bandwidths, set a lower frame rate and/or resolution.

Aspect Ratio

Default 16:9, select 4:3 to prevent distortion of 4:3 input sources.

Add Input

For adding network stream inputs. Stream must be on same network as selected Encoder and URL known

Decoder

Bitrate

Live bitrate of the stream. Adjust "Setting" to suit available bandwidth and/or desired usage.

For best results, ensure set bitrate does not exceed 80% of available.

Latency

Increasing latency allows data more time to be transferred correctly.

Increase if the stability of your Internet connection is poor, or if you're transmitting high-definition video and decrease for less delay.

Input Mode

Select an individual input or all inputs to stream from a multichannel encoder.

When one input is selected, all available bandwidth is utilised for that input, i.e. higher quality.

Display Mode

Control what to view on each connected monitor (if connected)

Audio

Quality

Adjust quality of an audio stream (higher quality consumes more bandwidth).

Speaker

Select where to output audio from a list of connected audio devices.

Microphone

Select an audio source from a list of connected devices.

Passthrough

Enable passthrough of audio on the selected device. When selected, audio from all connected devices will be sent to other connected devices.

Network & Support

Firewall Settings

It is common for corporate network firewalls/gateways/anti-virus software to have strict rules in place that may require modification to allow Nodestream devices to function.

Nodestream X devices communicate with the server and each other via TCP/UDP ports, therefore the following permanent network rules for all inbound & outbound traffic must be in place:

Ports

TCP 8180, 8230, 45000, 55443 & 55555

UDP 13810, 40000 & 45000 – 45200

Server access to IP address



- IPv4 only, IPv6 is not supported
- All traffic is protected with 384-bit encryption with rolling keys
- All port ranges are inclusive
- Contact Harvest support for further information @ support@harvest-tech.com.au

Support



User Resources



Contact and Support

support@harvest-tech.com.au

Troubleshooting

Issue	Cause	Resolution
“Software Key in Use” is displayed	Software key is being used on another device	Only one instance can be used at any given time. Log out of and/or close Nodestream applications on other devices
Unable to login	Network not connected Firewall blocking access Login details incorrect	Confirm network is connected and correctly configured Ensure Firewall settings are implemented and correct, refer previous page Confirm email and password is correct Reset password if required
No video displayed in the Home screen video panel	No active connection Input not selected on connected encoder Video driver out of date	Connect to a device that is “online” Select an active input in encoder settings Use “test source” input for diagnosis Update your computer's video driver to latest
No devices available in Contacts view	License not assigned to correct account group on server Device type filters enabled	Contact support@harvest-tech.com.au De-select all set filters
“Streaming” constantly displays when connecting	Network blocking UDP traffic	Ensure Firewall settings are implemented and correct, refer previous page
Video stream starts then drops to the “Streaming” screen	Possible UDP flood detection rule on firewall Bandwidth setting greater than what is available	Contact your IT department to remove any UDP flood detection for your PC Reduce bandwidth setting until stream is stable, approx. 80% of available bandwidth


Harvest Technology Pty Ltd 7 Turner Ave, Technology Park Bentley WA 6102, Australia www.harvest-technology.com.au

All rights reserved. This document is the property of Harvest Technology Pty Ltd. No part of this publication may

be reproduced, stored in a retrieval system or transmitted in any form or by any means, electronic, photocopy, recording or otherwise without the written consent of the CEO of Harvest Technology Pty Ltd.



Documents / Resources

	NODESTREAM NSW Nodestream Windows Application [pdf] User Guide NSW Nodestream Windows Application, Nodestream Windows Application, Windows Applicatio n
---	---

References

- [🌐 Turner Rooms for Rent](#)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.