

[Home](#) » [NODON](#) » **NODON DCL-1-1-00 Couvercle DCL – Connector Module Zigbee and EnOcean User Guide**



The image shows a black and orange EnOcean Enspire 1000 receiver module. It features a green LCD display showing a battery level icon, a QR code, and the text "LED PRESS". The module has a terminal block with five terminals labeled "L", "L_{FP}", "N", "N", and "N". The EnOcean logo is visible on the bottom right.

Contents

- 1 Specification
- 2 USE CAUTIONS
- 3 DETAILED USER GUIDE
- 4 APPROVALS AND CERTIFICATIONS
- 5 DANGER OF ELECTROCUTION
- 6 INSTALLATION
- 7 Assembly
- 8 USE AND PAIRING
- 9 CONTACT
- 10 AFTER SALES SERVICE
- 11 Documents / Resources
 - 11.1 References
- 12 Related Posts

Specification

- **Reference:** DCL-1-1-00
- **Power supply:** 230V AC ~ 50Hz
- **Operational temperature:** 0°C to 40°C
- **Dimension:** diameter 90mm without flange, 120mm with flange, height 45mm, without relay switch
- **Protection rating:** IP20
- **Weight:** 45g without flange / 60g with flange, without relay switch
- **Warranty:** 2 years

USE CAUTIONS


The NodOn DCL is an accessory that cannot be used alone.

It is intended for mounting with compatible NodOn modules:
EnOcean Multifunction relay switch.
Zigbee Multifunction relay switch.

refer to nodon.fr/en/technical-support/ for a full list of compatible products.

DETAILED USER GUIDE

Directly access the detailed user guide on the Support section on



nodon.fr/en/technical-support/

APPROVALS AND CERTIFICATIONS



This product complies with all the requirements of the European directives



■ This logo means that the appliance should not be disposed of with household waste. The components contained in this product must be recycled selectively so as not to risk harming health or the environment. Have your dealer take back these appliances or use the separate collection facilities provided by your local authority.



This product must be used indoor only.

DANGER OF ELECTROCUTION




BEFORE ANY INSTALLATION MAKE SURE THE POWER SUPPLY IS DISCONNECTED TO AVOID ANY RISK OF ELECTROCUTION.

Directly cut the power supply from the breaker box to avoid any risk of electrocution. This relay switch is designed to be used power up, a wrong installation can create a fire or an electric shock. If you are not confident about electrical installation, please ask a professional.

The relay switch must be installed and connected carefully following the instructions of this user guide. We will not be responsible for any loss or damage resulting from a nonrespect of the instructions of this user guide. Cut the power supply before any operation and don't do any modification if the LED is still ON.

INSTALLATION

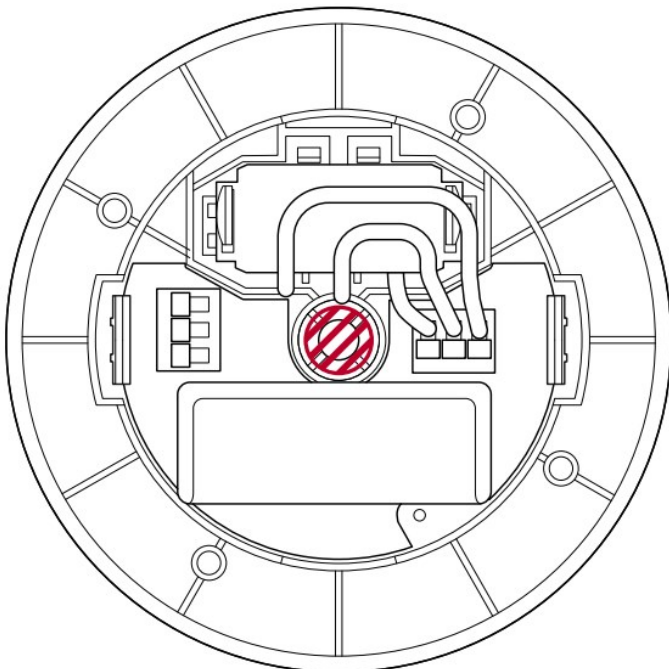

No cables in this area..

Assembly

1. Cut the power supply.

2. Insert the relay switch into its DCL, see **figure 1**.

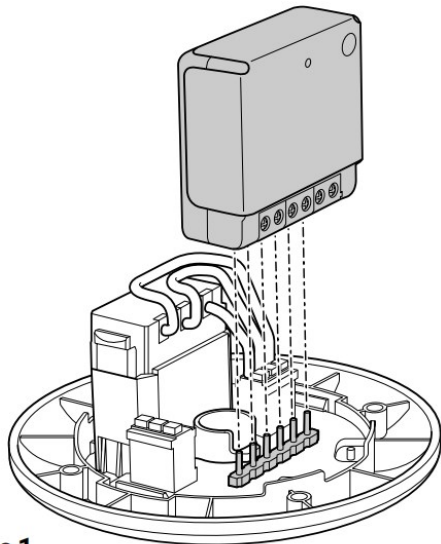


Figure 1

3. Screw in the 6 screws of the relay switch, see **figure 2**.

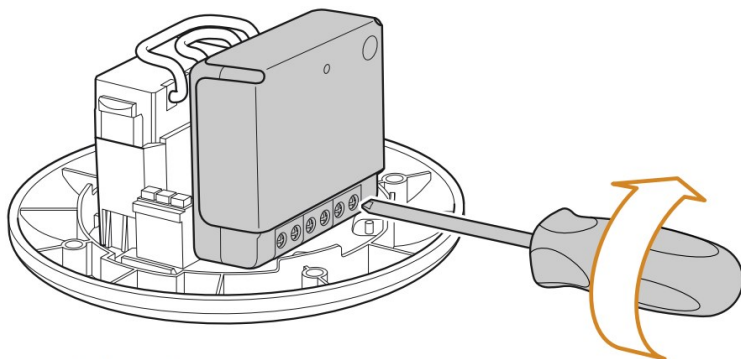


Figure 2

4. Assemble 120mm flange if required, see **figure 3**.

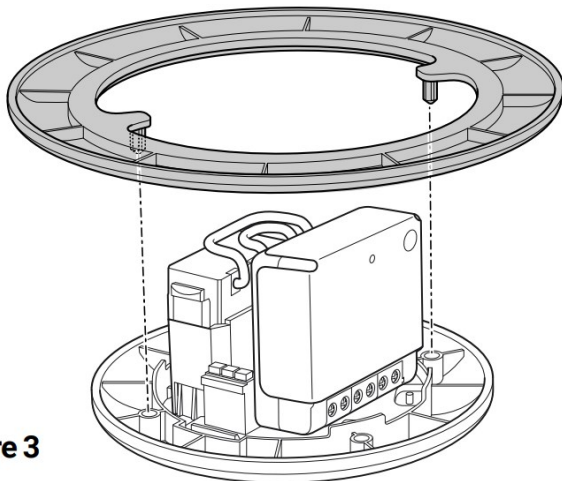


Figure 3

Caution: in this case a 110 mm piton is required.

5. Connect the power supply to the terminal block provided, see **figure 4**.

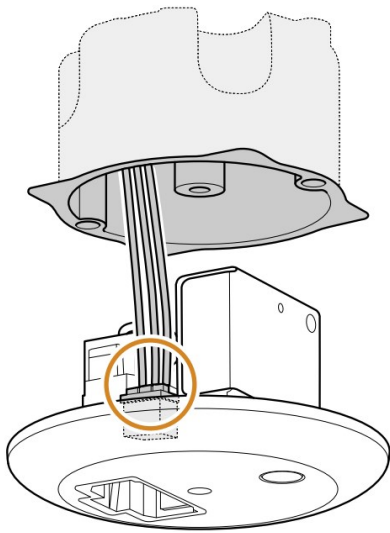


Figure 4

6. Screw the python to close the assembly, **see figure 5.**


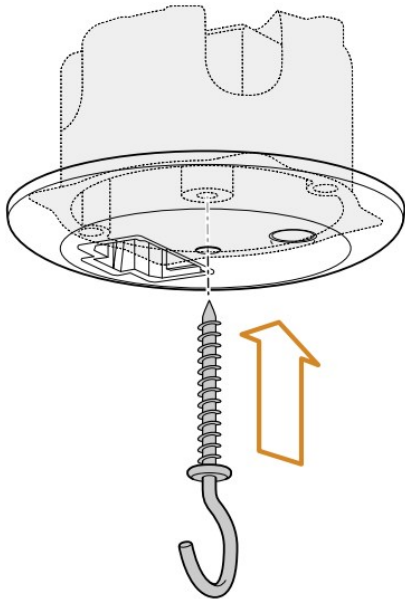


Figure 5

7. Turn the power supply back ON.

USE AND PAIRING



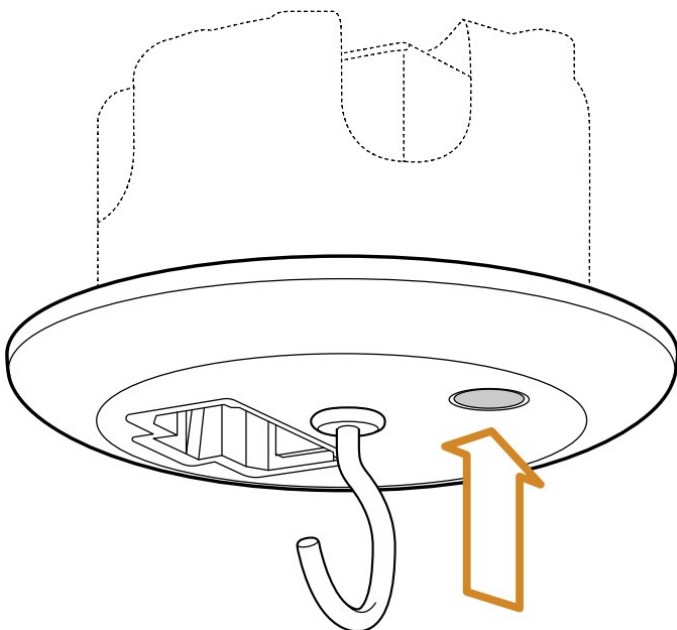

An action on the button of the DCL corresponds to an action on the wire switch connected to the module.

USE

You can use the button on the DCL to start pairing your module (see section “Pairing”).

PAIRING



EnOcean

If you have an EnOcean module, press the button on the DCL to start the pairing procedure..



Zigbee

If you have a Zigbee module, it will be paired for 15 minutes after it is powered up. After 15 minutes, press the button on the DCL to restart the pairing procedure.



For any other action, dismount your DCL to have access to the button of the module and refer to its manual.

CONTACT

NodOn SAS 121 rue des Hêtres 45590 St CYR EN VAL (FRANCE)

AFTER SALES SERVICE

nodon.fr/en section “support” support@nodon.fr



Documents / Resources

	NODON DCL-1-1-00 Couvercle DCL - Connector Module Zigbee and EnOcean [pdf] User Guide DCL-1-1-00 Couvercle DCL - Connector Module Zigbee and EnOcean, DCL-1-1-00, Couvercle DCL - Connector Module Zigbee and EnOcean, DCL - Connector Module Zigbee and EnOcean, Connector Module Zigbee and EnOcean, Module Zigbee and EnOcean, Zigbee and EnOcean, EnOcean
---	---

References

- [Fabricant domotique OBL - OEM - ODM pour la Maison Connectée](#)
- [Smart Home & Building - OEM ODM OBL solutions for IoT products](#)
- [Technical Support NodOn | Product documentation, tutorial, use cases](#)
- [Soporte técnico NodOn | Documentación del producto, tutorial, caso de uso](#)
- [Support technique NodOn | Documentation produit, tutoriel, cas d'usage](#)
- [Support technique NodOn | Documentation produit, tutoriel, cas d'usage](#)
- [technische Unterstützung für NodOn | technische Dokumentationen, Lernprogramme,](#)

Anwendungsbeispiele

-  [Technical Support NodOn | Product documentation, tutorial, use cases](#)
-  [Soporte técnico NodOn | Documentación del producto, tutorial, caso de uso](#)
-  [Support technique NodOn | Documentation produit, tutoriel, cas d'usage](#)
-  [Support technique NodOn | Documentation produit, tutoriel, cas d'usage](#)

Manuals+.