

NORDCAP UD1-2 Gastro Line Uni Drawer User Manual

Home » NordCap » NORDCAP UD1-2 Gastro Line Uni Drawer User Manual



Contents

- 1 NORDCAP UD1-2 Gastro Line Uni
- **Drawer**
- **2 IMPORTANT SAFETY INSTRUCTIONS**
- **3 UNPACKING AND INSTALLATION**
- **4 ELECTRICAL CONNECTION**
- **5 THERMOSTAT**
- **6 CLEANING AND MAINTENANCE**
- **7 WIRING DIAGRAM**
- 8 Documents / Resources
 - 8.1 References



NORDCAP UD1-2 Gastro Line Uni Drawer



IMPORTANT SAFETY INSTRUCTIONS

- 1. To get the best out of your cabinet, read these instructions thoroughly.
- 2. The user is responsible for correct use of the cabinet in accordance with instructions.
- 3. Contact your dealer immediately in the event of faults.
- 4. Place cabinet in a dry, well ventilated room.
- 5. Do not place close to sources of heat or in direct sunlight.
- 6. NB: all electrical appliances can be hazardous.
- 7. Do not store explosive substances such as gas, petrol, ether or the like in the cabinet.
- 8. No asbestos or CFC has been used in manufacture.
- 9. The compressor oil does not contain PCB.

ONLY FOR APPLIANCES WITH REFRIGERANT R290/R600a!

This appliance contains a flammable refrigerant, so make sure of good ventilation around the appliance. Do not use mechanical devices when defrosting, this can cause leakage of the cooling system. Do not use electrical appliances inside the refrigerated storage compartment.

Any repair of the appliance should be carried out by a skilled technician (EN 60335-2-89: 2010).

Important

The base of this cabinet is designed for storage of hermetically sealed containers containing processed food (EN 16825).

UNPACKING AND INSTALLATION

Remove the wooden pallet and the packing. External surfaces are supplied with a protection foil, which must be removed before installation.

To ensure correct function it is important that the cabinet is level. If the cabinet is supplied with legs, these can be adjusted.

ELECTRICAL CONNECTION

The cabinet operates on 220-240 V/50 Hz.

The wall socket should be easily accessible.

All earthing requirements stipulated by the local electricity authorities must be observed. The cabinet plug and wall socket should then give correct earthing. If in doubt, contact your local supplier or authorized electrician. The main electrical connections must be done by skilled electricians.

START-UP OF THE CABINET

Before use, we recommend that the cabinet is cleaned, see the section on maintenance and cleaning.

Important If the cabinet has been horizontally placed during transport, please wait 2 hours before starting up the cabinet.

THERMOSTAT

The thermostat is placed in the control panel.



The thermostat has been pre-set and in most cases it is not necessary to adjust the settings. When turning on the cabinet the display will show the current temperature in the cabinet.

Display set temperature:

SET Press this key and the display will show the set temperature. Press the key again to return to normal reading

Set new temperature:

SET Press this key continuously for more than 3 seconds and the display shows the set temperature. (The '°C' LED is flashing)

△ Press this key to increase the set temperature.

Press this key to lower the set temperature.

SET Press this key to save the new settings. The display will flash with the new value and will then return to normal reading.

A+ ▼Keyboard lock/unlock:

Press these keys simultaneously for 5 seconds. To lock the display reads 'PoF'. To unlock the display reads 'Pon'.

Alarm codes:

P1 Flashing in the display: indicates that the cabinet sensor is defective.

P2 Flashing in the display: indicates that the evaporator sensor is defective.

CHANGING COOL/FREEZE FUNCTION

R/F Press this key for more than 3 seconds to change from Cooling <-> Freeze.

DEFROSTING

The cabinet defrosts automatically with pre-set intervals. If the door to the cabinet is opened or the contents of the cabinet is changed frequently it may become necessary to defrost the cabinet manually.



Pressing this key continuously for more than 3 seconds will start a manual defrosting and then return to normal operation.

Defrosted water runs to a container placed in the compressor compartment and evaporates.

CLEANING AND MAINTENANCE

- Switch off the electrical connection at the socket.
- The cabinet must be periodically cleaned. Clean the external and internal surfaces of the cabinet with a light soap solution and subsequently wipe dry.
- Do not spray the appliance with direct jets of water or using high pressure appliances.
- Do NOT use cleansers containing chlorine or other harsh cleansers, as these can damage the surfaces and the internal cooling system.
- Clean the condenser and the compressor compartment using a vacuum cleaner and a stiff brush.

SERVICE


The cooling system is a hermetically sealed system and does not require supervision, only cleaning. If the cabinet fails to cool, check if the reason is a power cut.

If you cannot locate the reason to the failure of the cabinet, please contact your supplier. Please inform model and serial number of the cabinet. You can find this information on the rating label which is placed inside the cabinet in the top right hand side.

DISPOSAL

Disposal of the cabinet must take place in an environmentally correct way. Please note existing regulation on disposal. There may be special requirements and conditions which must be observed.

WIRING DIAGRAM

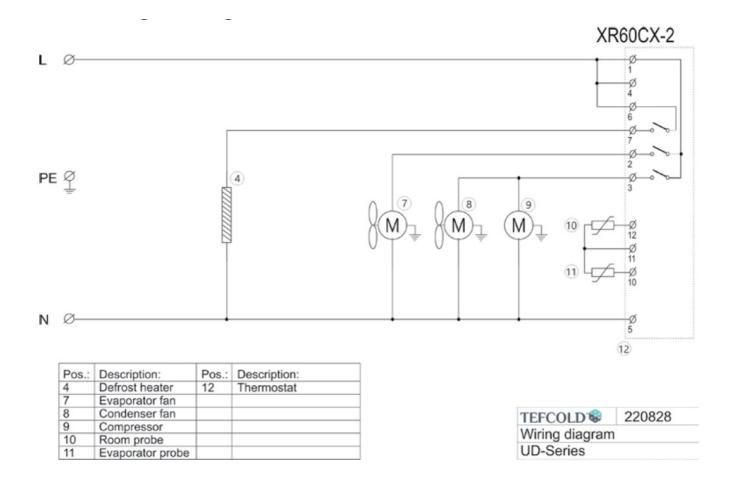

Documents / Resources



NORDCAP UD1-2 Gastro Line Uni Drawer [pdf] User Manual

UD1-2, UD1-2 Gastro Line Uni Drawer, Gastro Line Uni Drawer, Line Uni Drawer, Uni Drawer, D rawer

References

• User Manual

Manuals+, Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.