



NOVASTAR NovaPro UHD Jr All-in-One Video Processing Controller User Guide

[Home](#) » [NOVASTAR](#) » NOVASTAR NovaPro UHD Jr All-in-One Video Processing Controller User Guide 

*NOVASTAR NovaPro UHD Jr All-in-One Video
Processing Controller User Guide*



NovaPro UHD Jr
All-in-One Controller




Contents

- [1 Introduction](#)
- [2 Applications](#)
- [3 Operations](#)
- [4 Specifications](#)
- [5 Documents / Resources](#)
- [6 Related Posts](#)

Introduction

The NovaPro UHD Jr is NovaStar's all-in-one controller that integrates video processing with sending card functions.

The NovaPro UHD Jr features multiple input connectors, supporting up to 8 inputs simultaneously, and multiple output connectors, including 16 Ethernet ports and 4 optical fiber ports. Thanks to 4K×2K@60Hz ultra high-definition inputs and outputs, 8K×1K@60Hz ultra-high resolution settings, excellent video signal processing capabilities and large loading capacity, the NovaPro UHD Jr is well suited for stage control systems, conference sites, activities, exhibition sites and other high-end rental applications as well as fine-pitch LED displays.

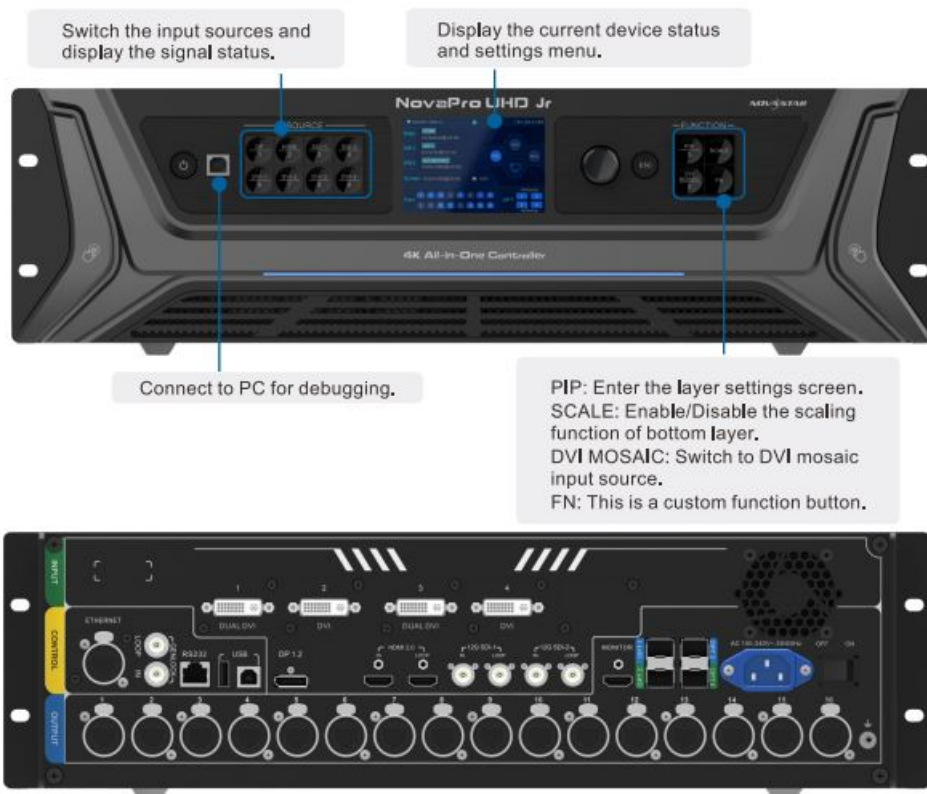


| Input | | |
|-----------|-----|--|
| Connector | Qty | Description |
| DVI | 4 | <ul style="list-style-type: none">- Four DVI are all single-link DVI connectors by default. Each DVI: Input resolution up to 1920x1200@60Hz, downward compatible. Four single-link DVI input sources constitute one input source (DVI MOSAIC).- In dual-link mode, DVI 1 and DVI 3 are dual-link DVI connectors while DVI 2 and DVI 4 are unavailable. DVI 1/DVI 3: Input resolution up to 3840×1080@60Hz, downward compatible. Maximum resolution supported: Max. width: 2048, Max. height: 2048 |


| Connector | Qty | Description |
|-----------------|-----|---|
| 12G-SDI | 2 | Input resolution up to 4096×2160@60Hz, downward compatible, loop output Maximum resolution supported: Max. width: 8192. Max. height: 8192 |
| DP 1.2 | 1 | Input resolution up to 3840×2160@60Hz, downward compatible, HDCP 1.3 compliant Maximum resolution supported: Max. width: 8192. Max. height: 8192 |
| HDMI 2.0 | 1 | Input resolution up to 3840×2160@60Hz, downward compatible, loop output, HDCP 2.2 and EDID management Maximum resolution supported: Max. width: 8192. Max. height: 8192 |
| Output | | |
| Connector | Qty | Description |
| Ethernet port | 16 | 16 × Neutrik Gigabit Ethernet output connectors, allowing for a loading capacity up to 10,400,000 pixels Maximum resolution supported: Max. width: 16K. Max. height: 8K |
| OPT 1-4 | 4 | 10G optical outputs In fiber converter mode, used as input connectors In video controller mode, used as output connectors <ul style="list-style-type: none"> - OPT 1 transmits data of Ethernet ports 1-8. - OPT 2 transmits data of Ethernet ports 9-16. - OPT 3 serves as the copy/hot backup for OPT 1. - OPT 4 serves as the copy/hot backup for OPT 2. |
| MONITOR | 1 | HDMI connector for output monitoring Resolution up to 1920×1080@60Hz |
| Control | | |
| Connector | Qty | Description |
| ETHERNET | 1 | Connect to the PC for communication, or to the Web for device control. |
| USB-B | 1 | Connect to the PC for device control. Used as the input connector to connect a NovaPro UHD Jr unit for image mosaic |
| USB-A | 1 | Used as the output connector to connect a NovaPro UHD Jr unit for image mosaic |
| GENLOCK IN-LOOP | 1 | Connect to a synchronization signal to synchronize all the connected NovaPro UHD Jr units. |
| RS232 | 1 | Connect to the control device. |

Applications


1 NovaPro UHD Jr Unit for Image Mosaic

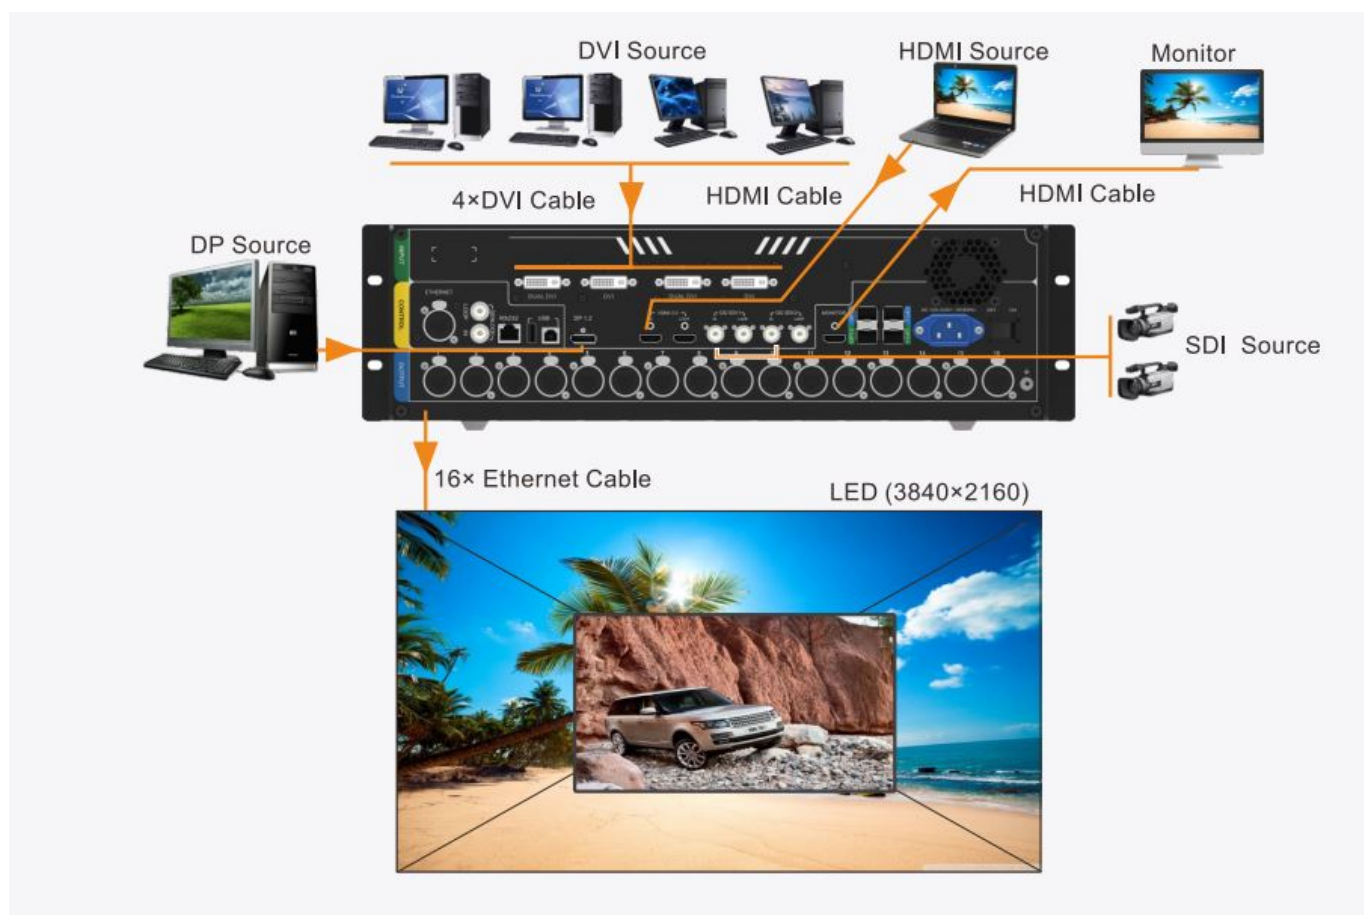


4 NovaPro UHD Jr Unit for Image Mosaic

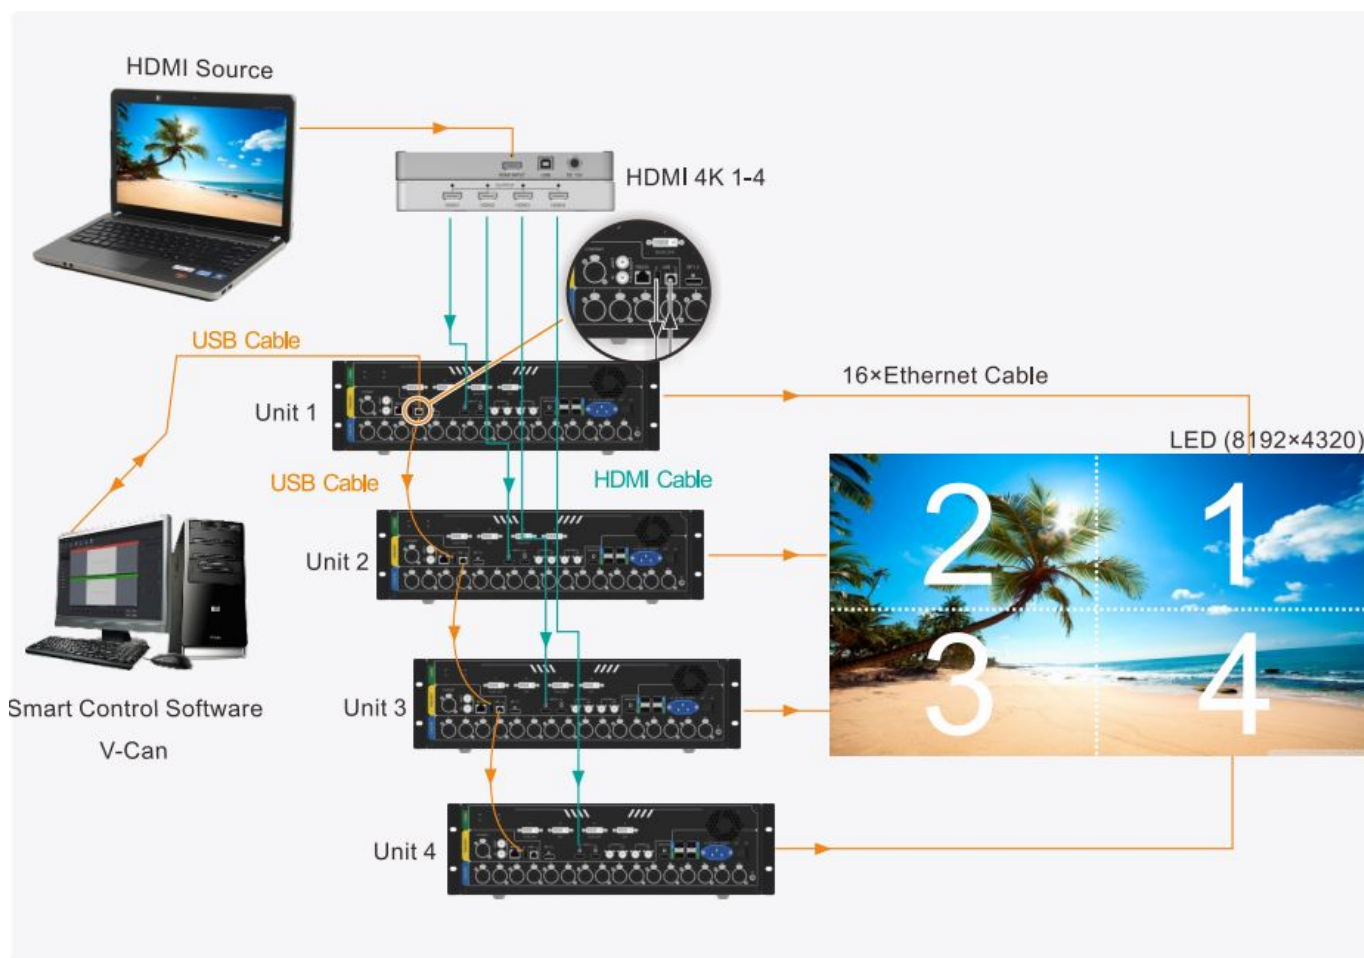

DVI MOSAIC – 1* input source: 3840*2160@60Hz

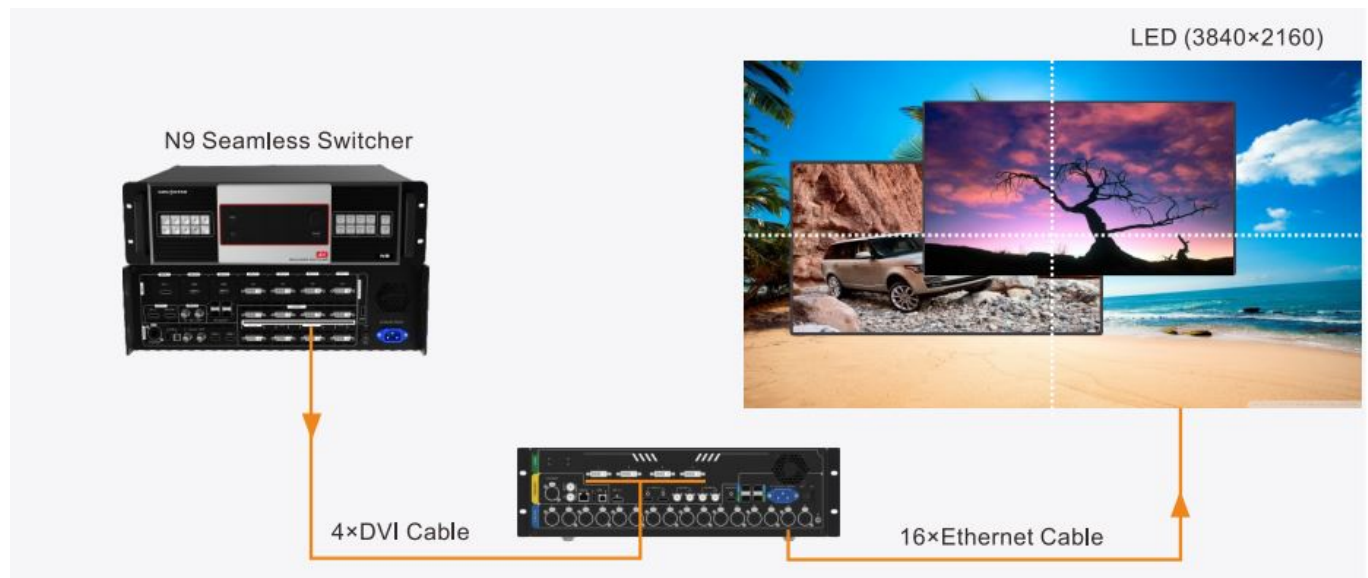

DVI MOSAIC – 4* input source: 3840*2160@60Hz

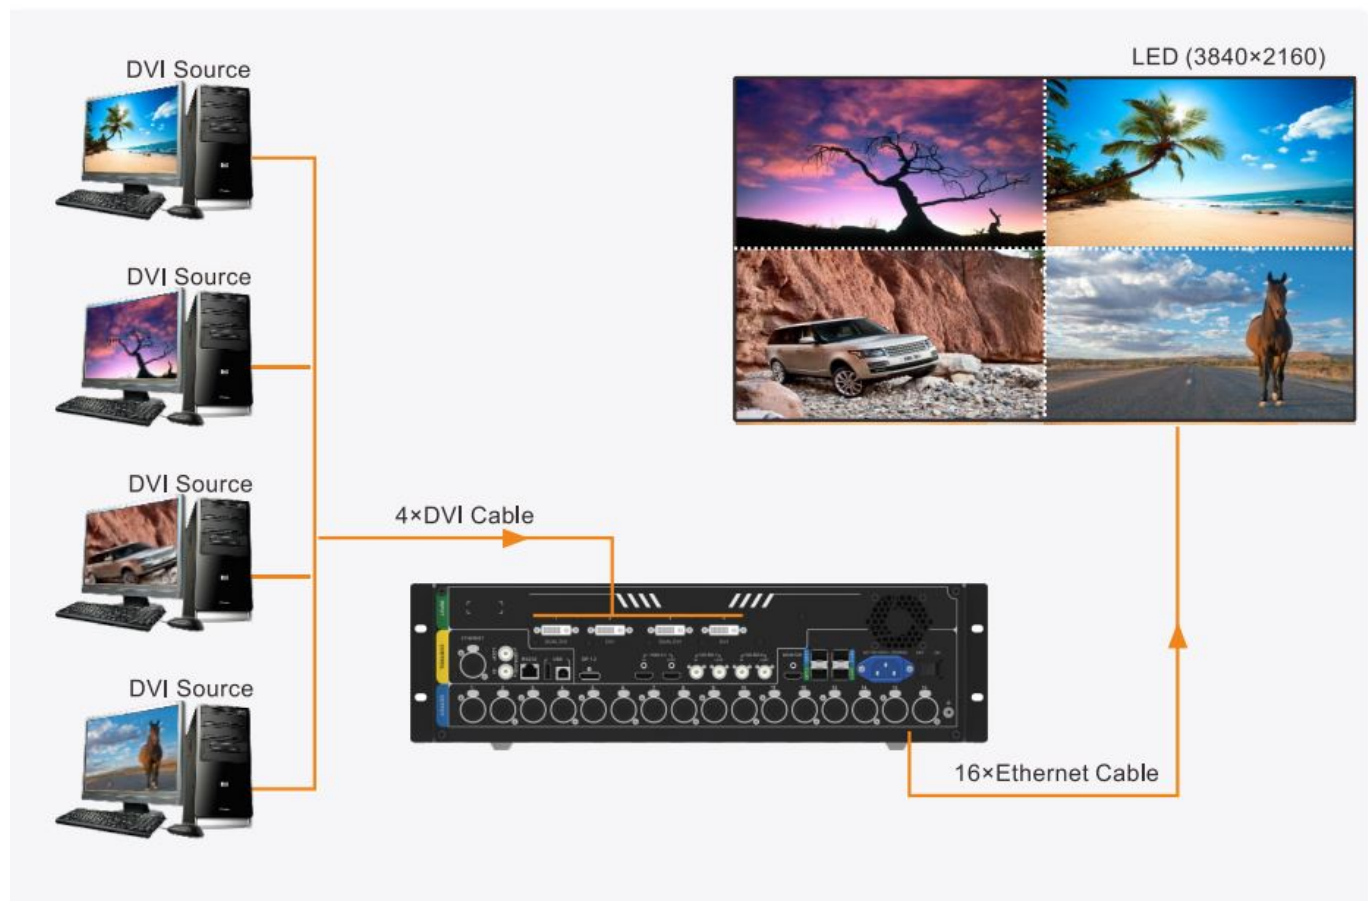

Operations

Basic operations of the NovaPro UHD Jr includes configuring screens, adding layers and selecting input sources.

Quick Configuration

Preconditions


- LED screen must be a regular screen.
- Cabinets of the screen must be regular cabinets with the same resolution.
- The following data flow settings are supported. During data flow settings, you must ensure that the physical connection of each port is along the same direction and downward to next one.



- During data flow settings, you must ensure that the Ethernet Port 1 is at the beginning position of the whole physical connection.

Procedure

- Step 1 Power on the LED screen.
- Step 2 On the home screen, press the knob to enter the main menu screen. Then rotate the knob to choose **Screen Settings** > **Quick Configuration** to enter the quick configuration screen.
- Step 3 Set **Cabinet Row Qty** and **Cabinet Column Qty** according to the actual row and column quantities of the cabinets.

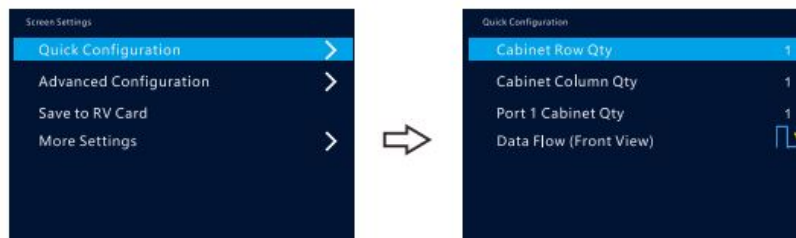

- Step 4 Rotate the knob to select **Port 1 Cabinet Qty** to set the quantity of the cabinets loaded by Ethernet port 1.

Note

- The quantities of the cabinets loaded by Ethernet ports 1-15 must be the same.
- The quantity of cabinets loaded by each Ethernet port must be an integer multiple of Cabinet Row Qty or Cabinet Column Qty of the screen.

- Step 5 Rotate the knob to select **Data Flow (Front View)** and press it, then select an appropriate physical connection mode of the cabinets.
- During data flow settings, you can view the real-time effects of different data flow settings on LED display by rotating the knob. When you are satisfied with the LED display image, press the knob to save the settings; when you are not satisfied, press **ESC** button to exit the current operation and the settings will not be saved.
- Step 6 Press **ESC** button to exit the quick configuration screen.
- Step 7 Rotate the knob to select **Save to RV Card** and press the knob to send and save the screen configuration file to the hardware.

Adding Layers

- Step 1 Rotate the knob to select **Main Layer > Status > On** to add the main layer. The main layer is added by default.
- Step 2 Rotate the knob to select **Input Source** and select the desired input source based on your actual needs.


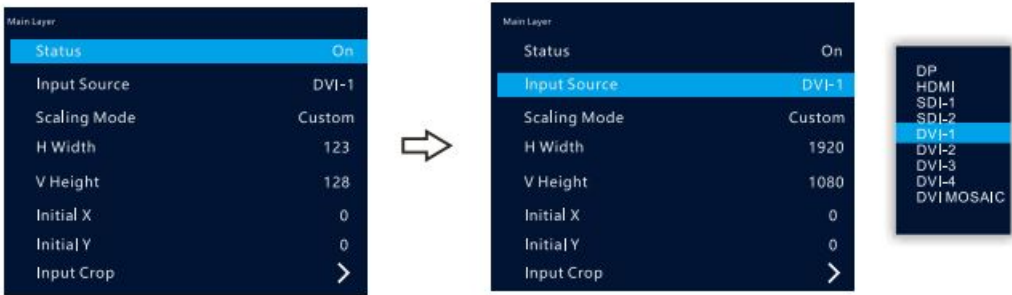


Image Mosaic

When 4 NovaPro UHD Jr units are used together for image mosaic, the total pixels of the LED screen are 7680*4320.

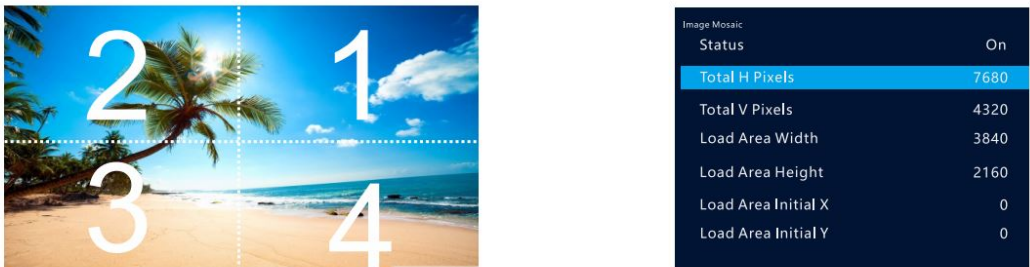


| No. | Load Area Width | Load Area Height | Load Area Initial X | Load Area Initial Y |
|------------------|-----------------|------------------|---------------------|---------------------|
| NovaPro UHD Jr 1 | 3840 | 2160 | 3840 | 0 |
| NovaPro UHD Jr 2 | 3840 | 2160 | 0 | 0 |
| NovaPro UHD Jr 3 | 3840 | 2160 | 0 | 2160 |
| NovaPro UHD Jr 4 | 3840 | 2160 | 3840 | 2160 |

Working Mode


The NovaPro UHD Jr can work as a video controller (default) or fiver converter.

- Video controller: Theme ports and optical fiver connectors are all used for output.
- Fiver Converter: Optical fiver connections are used for input exile Theme ports are used for output.

Video Controller

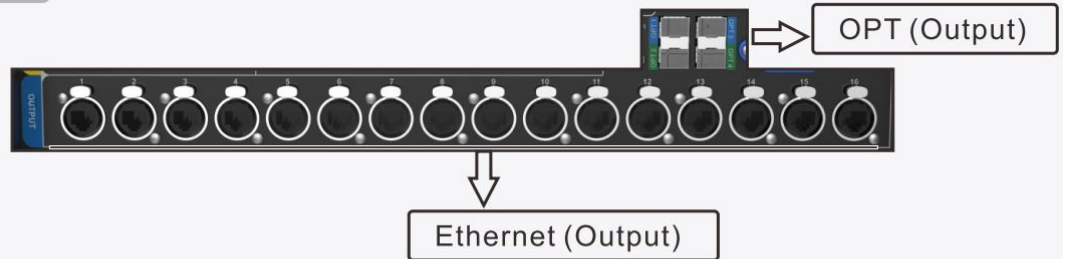

Fiber Converter

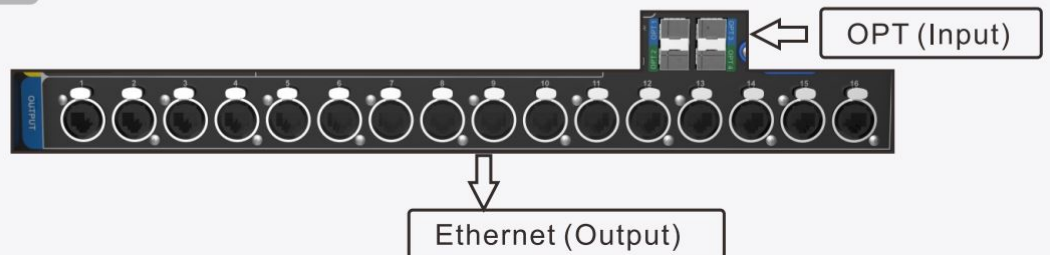

Advanced Functions

HDR

HDR function can realize smoother gradations, finer details and richer color density for the image, bringing you a more vivid and real visual experience.



| HDR | |
|------------------------|------|
| Status | On |
| Peak Screen Brightness | 1000 |
| Ambient Brightness | 30 |
| Low Grayscale Mode | 15 |
| Reset | |

Adjusting **Ambient Brightness**, **Peak Screen Brightness** and **Low Grayscale Mode** can achieve the best HDR effect.

Note

Current HDR function of the device only supports HDR10 input source.
When HDR function is enabled, the output loading capacity will be reduced by 50%.

Low Latency


When the NovaPro UHD Jr is used together with NovaStar Armor series receiving cards (A8/A8s/A9s/A10s Plus), this function can realize 2 frame delay from sending card to receiving card.

OPT Mode


The NovaPro UHD Jr supports 2 kinds of OPT modes: Hot Backup (default) and Copy.

- Hot Backup: OPT 3 serves as the hot backup for OPT 1. OPT 4 serves as the hot backup for OPT 2.
- Copy: OPT 3 serves as the copy for OPT 1. OPT 4 serves as the copy for OPT 2.

Hardware Connections for Copy Mode

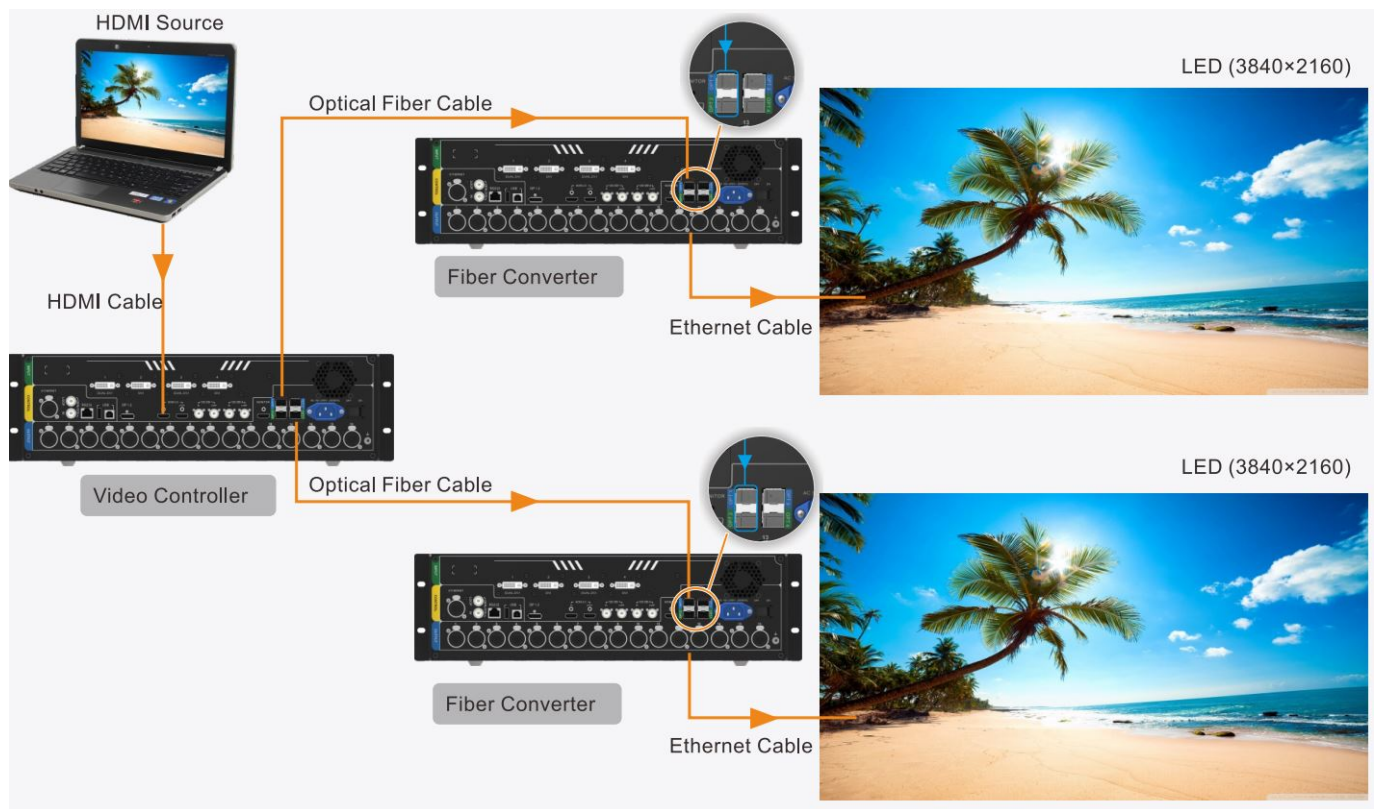

Hardware Connections for Hot Backup Mode

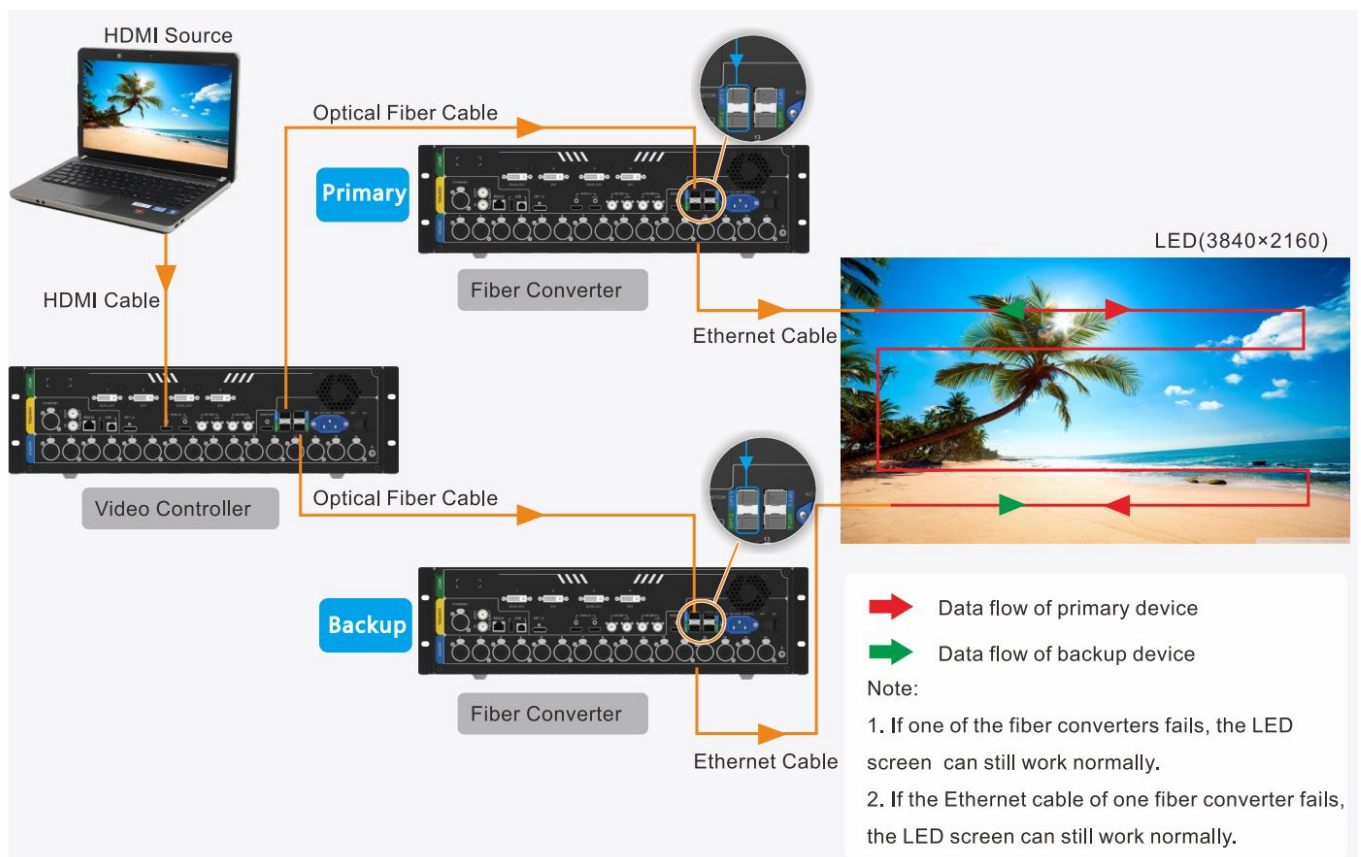

Specifications

| Overall Specifications | | |
|---------------------------|-----|--------------------------------|
| Connector | Qty | Description |
| Power connector | 1 | AC100V-240V~, 50/60Hz |
| Operating temperature | | 0°C-50°C |
| Dimensions | | 482.6 mm × 396.5 mm × 139.0 mm |
| Overall power consumption | | 70 W |
| Net weight | | 6.3 kg |

Toll-Free 24-Hour Hotline
400-696-0755

Xi'an NovaStar Tech Co., Ltd. <http://www.novastar.tech>
101 Block D-F, 01 Square, Xi'an Software Park, No.72, 2nd Keji Road, Xi'an, Shaanxi, China

Documents / Resources

| | |
|---|---|
|  | NOVASTAR NovaPro UHD Jr All-in-One Video Processing Controller [pdf] User Guide NovaPro UHD Jr, All-in-One Video Processing Controller |
|---|---|

[Manuals+](#).