

NUOENX

**W702 Digital
Wireless Backup
Camera System**



NUOENX W702 Digital Wireless Backup Camera System Owner's Manual

[Home](#) » [NUOENX](#) » NUOENX W702 Digital Wireless Backup Camera System Owner's Manual 

Contents

- [1 NUOENX W702 Digital Wireless Backup Camera System](#)
- [2 Product Information](#)
- [3 Product Usage Instructions](#)
- [4 Frequently Asked Questions](#)
- [5 Feature](#)
- [6 Main Menu Options](#)
- [7 Package Content](#)
- [8 Assemble and Install](#)
- [9 Wiring Guide](#)
- [10 Pairing Method](#)
- [11 Trouble Shooting](#)
- [12 WARRANTY CARD](#)
- [13 Contact](#)
- [14 Documents / Resources](#)
 - [14.1 References](#)

NUOENX

NUOENX W702 Digital Wireless Backup Camera System



Product Information

Specifications

- Brand: NUOENX
- Product: Wireless Backup Camera System with 7 Inch Monitor
- Features:
 - IP69K Waterproof Rating
 - 7-inch TFT LCD Display
 - Digital Wireless Technology
 - Night Vision Capability

Product Usage Instructions

Part 1 – Main Menu Options

Refer to the user manual for detailed information on navigating the main menu options.

Part 2 – Package Content

- Monitor x 1

- Fixed Bracket for Monitor x 1
- Fixed Bracket for Camera x 2
- Suction Cup Mount x 1
- Camera x 2
- Installation Kits x 1

Part 3 – Assemble and Install

1. Test the system before installation.
2. Install the monitor bracket and camera brackets as instructed.
3. Connect the power cords and antennas properly.

Part 4 – Wiring Guide

Monitor Voltage Range: 12V-24V

Camera Voltage Range: 12V-24V

Power the Monitor

Connect the car charger plug to the monitor wire connector and insert it into the cigarette lighter receptacle.

Power the Camera

- Connect the black wire to the Negative/Ground on the car.
- For camera activation:
 - A – When the car is reversing: Connect the red wire to the backup light's positive.
 - B – When the car starts: Connect the red wire to the running light's positive.

Part 5 – Pairing Method

1. Short press (M) button to access the Menu and find the Pairing function.
2. Press (S) button to select and enter pairing status.
3. Wait for about 20 seconds until camera images appear to complete pairing.

Frequently Asked Questions

- **Q1: How to turn on/off parking lines?**
 - A: Power on the monitor, access the SYSTEM menu by pressing (M), and then toggle parking lines using (S).
- **Q2: The display screen is blurred/abnormal.**
 - A: The camera lens may be dirty or fogged. Clean or defog the lens for clear images.
- **Q3: No power to monitor.**
 - A: Ensure car ignition is on. Check wiring connections and press the power ON/OFF button on the monitor.

Feature



IP69K
Waterproof



152° Wide
View Angle



7" TFT High
Definition Display



0.0075 Lux
Night Vision




2.4GHz
Wireless Transmission

Main Menu Options

Part 1 Main Menu Options

1. Indicate Light, Light Up After Powered
2. Turn ON/OFF the Monitor
3. Function Up/Down
4. Switch for Camera 1/Camera 2
5. Menu: Pairing/Picture/Mir-Flip/Cam Setup/System
6. Select to Enter

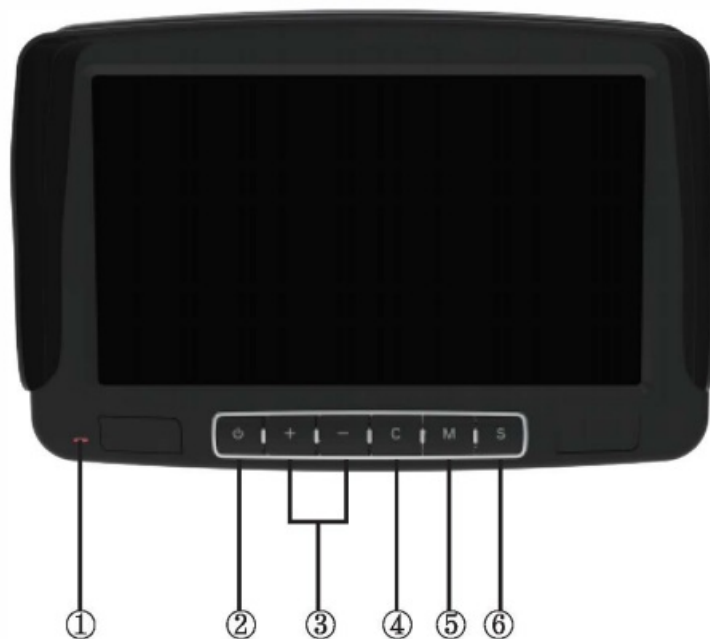







Package Content

		
Monitor x 1	Fixed Bracket for Monitor x 1	Camera x 2
		
Fixed Bracket for Camera x2	Suction Cup Mount x 1	Installation Kits x 1
		
Antenna x 3	Power Cord x 3	car charger x 1

- If you find the package is missing some accessories, please contact us.
- Here is our 24h-online Customer Service Email: Nuoex@outlook.com

Assemble and Install

Test before installation

① Mount the antennas to the monitor and camera	② Connect two power cords to monitor and camera	③ Powered them in 3 feet (Get power from your vehicle)
		
		

Make sure the system works properly and then install it

① Install monitor bracket



② Choose one of the camera bracket (Mount on the top or back)

Roof
bracket




Back
bracket

Recommend



Wiring Guide

- Monitor Voltage Range: 12V-24 V
- Camera Voltage Range: 12V-24V

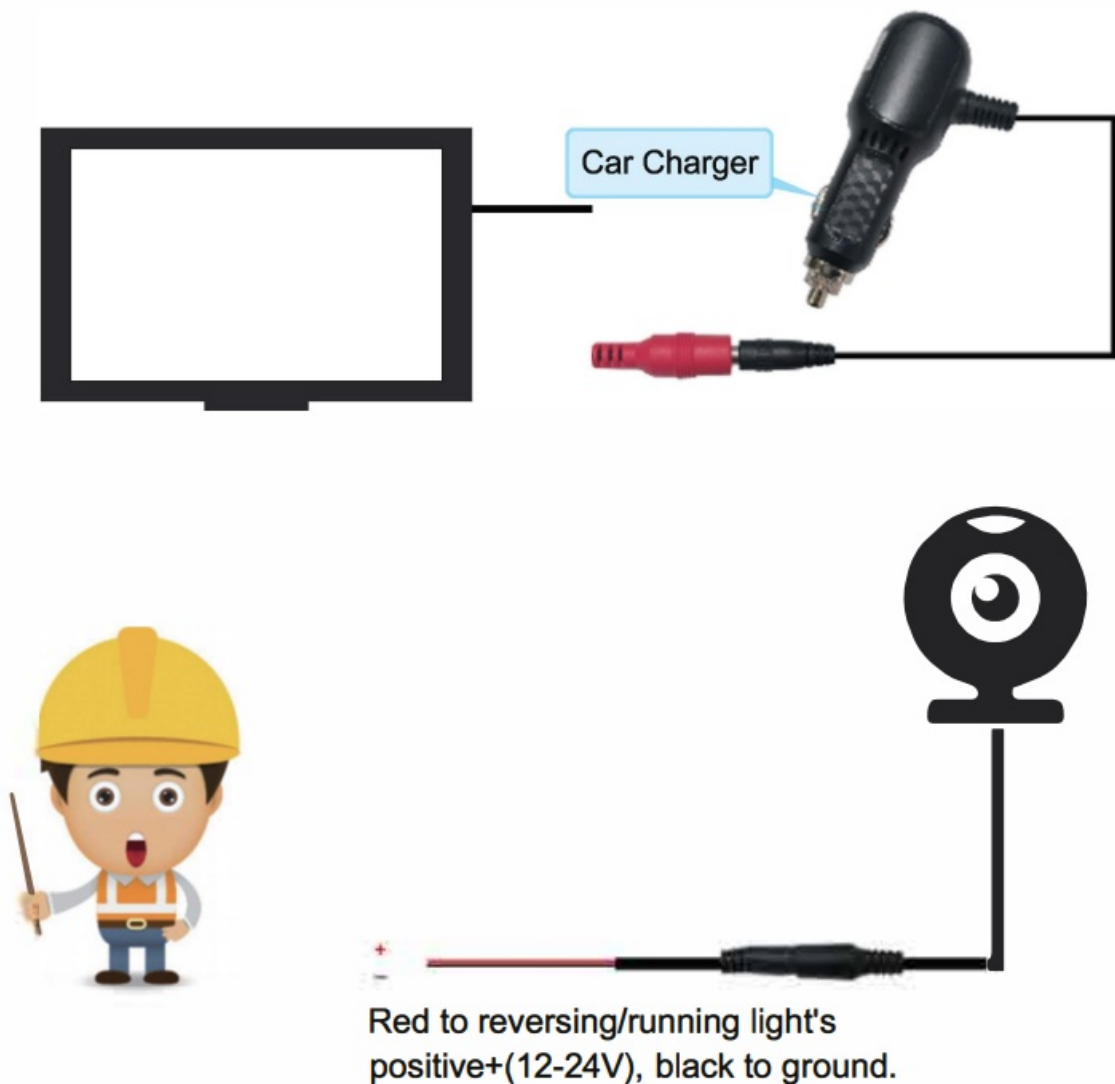

Note: You can add a license plate camera for reversing or hitch rear view or front view (Not Included in package)
For the second camera, you can click our store to look through or contact us via
Nuoenx@outlook.com

Power the monitor

Connect the accessory plug of car charger with the monitor wire connector, then insert it into the cigarette lighter receptacle

Power the camera

1. Connect the black wire to Negative(-)/Ground/Sheet metal on the car
2. A – Camera on when the car is reversing: Connect the red wire to the positive(+) of the backup light
B – Camera on when the car starts: Connect the red wire to the (+) of running light/JACC

Pairing Method

* If you find the system hasn't been paired, please pair them as the following method.

1. Short press (M) button to choose the Menu and find the Pairing function

2. Press (S) button to select and enter the pairing status
3. Please wait about 20 seconds, camera images appear and complete pairing

Note:

If you have any question in this part, please feel free to contact us: Nuoenx@outlook.com

Please keep this instructions or write down our email: Nuoenx@outlook.com, so you can contact us in time once you have any problems. We will be here for you forever!

Trouble Shooting

Q1: How to turn on/off parking lines?

A: Power monitor and make sure it is on, and then press the (M) button to choose the SYSTEM, then press (S) to enter setup page and turn on/off parking lines.

Q2: The display screen is blurred/abnormal.

A: The camera lens may be dirty or fogged.

Q3: No power to monitor

- A: – Car ignition switch not engaged. Place car ignition switch in the “Aux” position or start car engine. Make sure the cigarette lighter plug is fully in
- May be caused by an incorrect wiring connection, check the wiring
- The monitor may not be on, press the power ON/OFF button

Q4: No power to camera

A: – Car ignition switch not engaged. Place car ignition switch in the Aux” position or start car engine

- Incorrect wiring connection, check wiring
- If camera power is derived from vehicle running lights, running lights must be on
- Incorrect power range, try another power source with correct voltage (12 – 24 V)

QS: Can I add a second camera?

A: Yes, this wireless backup camera system can add no more than 2 cameras. Click our store to look through or contact us via Nuoenx@outlook.com

WARRANTY CARD

- Buyer Name
- Order Number
- Email Address
- Item Model (ASIN)

- Purchasing Date
- Problem Details

1. Received the defective product/Package missing parts
2. You do not want it when received
3. Need some technical support
4. Product destroyed during use
5. Product does not meet your expectation
6. Other Reason


For any problem you may have, just contact us via Nuoenx@outlook.com

We hope this product can work as you expect. If you have any suggestions for us to improve it or would like to share your experience with us, please feel free to contact the Customer Service Representative(Mia Li), we greatly appreciate and a special gift has been prepared for you

Contact

- Email: Nuoenx@outlook.com
- Contact Person: Mia Li
- Warranty: 2Year Factory Warranty
- 24 Hours Customer Service

Documents / Resources

	NUOENX W702 Digital Wireless Backup Camera System [pdf] Owner's Manual FW71, W702 Digital Wireless Backup Camera System, W702, Digital Wireless Backup Camera System, Wireless Backup Camera System, Backup Camera System, Camera System, System
---	---

References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.