



# nVent SCHROFF 24568-362 Standard Type Guide Rail User Guide

[Home](#) » [nVent SCHROFF](#) » nVent SCHROFF 24568-362 Standard Type Guide Rail User Guide 

## Contents

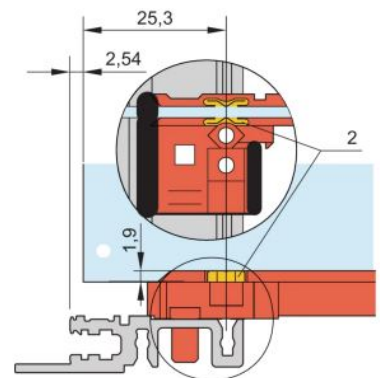

- [1 nVent SCHROFF 24568-362 Standard Type Guide Rail](#)
- [2 DIMENSION](#)
- [3 KEY FEATURES](#)
- [4 PRODUCT ATTRIBUTES](#)
- [5 ADDITIONAL PRODUCT DETAILS](#)
- [6 Documents / Resources](#)
  - [6.1 References](#)



**nVent SCHROFF 24568-362 Standard Type Guide Rail**



## DIMENSION



## KEY FEATURES

- NEW generation Standard type plastic guide rails for reliable retention of PCBs or plug-in units
- Significantly increased stability, due to a optimized design and high quality material (PC)
- Improved fire safety properties, fulfills EN 45545-2 requirement sets R22, R23 and R24 with HL3
- “Halogen-Free”, according to IEC 61249-2-21
- Can be clipped into horizontal rails (Al extrusion) or into 1.5 mm thick plates
- Can be bolted to the horizontal rails Type H and R for higher shock and vibration requirements
- Optional ESD clip for an conductive contact between PCB and horizontal rail available

- Storage temperature: from -40 °C ... 130 °C

## PRODUCT ATTRIBUTES

- **Product Type:** Guide Rail
- **Type:** Standard
- **Works With:** Subracks; Cases; 19" Chassis; Systems
- **Board Depth:** 220 mm
- **Groove Width:** 2
- **Material:** Polycarbonate
- **Color:** Red
- **Complies With:** EN 45545-2
- **Package Quantity:** 10

## ADDITIONAL PRODUCT DETAILS

New generation of accessory type guide rails for PCBs or plug-in units. Forms a reliable interface between the subrack mechanics and the sub-assemblies. Please take into consideration that deliveries may be carried out in the stated SPQs (SPQ, e.g. 5 pieces, 10 pieces, 50 pieces, etc.). Differing order quantities (e.g. 2 pieces) may be changed to the next possible delivery quantity = Standard Pack Quantity.

### North America

All locations +1.763.422.2661 Chat with us: [schroff.nvent.com](https://schroff.nvent.com)

### Europe

Straubenhardt, Germany +49.7082.794.0 Betschdorf, France +33.3.88.90.64.90 Warsaw, Poland +48.22.209.98.35 Assago, Italy +39.02.932.7141 Chat with us: [schroff.nvent.com](https://schroff.nvent.com)

### Asia



Shanghai, China +86.21.2412.6943 Qingdao, China +86.532.8771.6101 Singapore +65.6768.5800 Shin-Yokohama, Japan +81.45.476.0271 Chat with us: [schroff.nvent.com](https://schroff.nvent.com)

### Middle East & India

Dubai, United Arab Emirates +971.4.378.1700 Bangalore, India +91.80.6715.2001 Istanbul, Turkey +90.216.250.7374 Chat with us: [schroff.nvent.com](https://schroff.nvent.com)

2023 nVent. All nVent marks and logos are owned or licensed by nVent Services GmbH or its affiliates. All other trademarks are the property of their respective owners. nVent reserves the right to change specifications without notice.

## Documents / Resources

	<p><a href="#">nVent SCHROFF 24568-362 Standard Type Guide Rail</a> [pdf] User Guide 24568-362, 24568-362 Standard Type Guide Rail, Standard Type Guide Rail, Guide Rail, Rail</p>
	<p><a href="#">nVent SCHROFF 24568-362 Standard Type Guide Rail</a> [pdf] Owner's Manual 24568-361, 24568-362 Standard Type Guide Rail, Standard Type Guide Rail, Guide Rail, Rail</p>

References

- [🔥 The Future of Connection and Protection | nVent](#)
- [🔥 We connect and protect | nVent Schroff - Enclosures, Power distribution, Climate control, IT infrastructure, Front Panels, Board Retainers, Embedded Systems | nVent](#)