



# nVent CSBS1 Single Side Flange Attachments Instructions

[Home](#) » [nVent](#) » nVent CSBS1 Single Side Flange Attachments Instructions 



Contents

1 CSBS1 Single Side Flange Attachments

2 SAFETY INSTRUCTIONS:

3 Documents / Resources

3.1 References

4 Related Posts

## CSBS1 Single Side Flange Attachments


*Part Number		Flange Thickness	
Global	Article	Inch	mm
CS BS 1	404504	1/4 to 3/4	6 to 19
CSBS1A	404505		
CSBS2	404506	3/4 to 1-1/4	19 to 31

\*Part Number are EG Plating. Other Coatings are available.


The required type, number and size of fasteners used for the structure attachment fitting shall be in accordance with NFPA 13.

Sway brace assemblies are infended to be installed in accordance with NFPA 13 and the manufacturer's installafion instructions


**CSBS1/CSBS2**

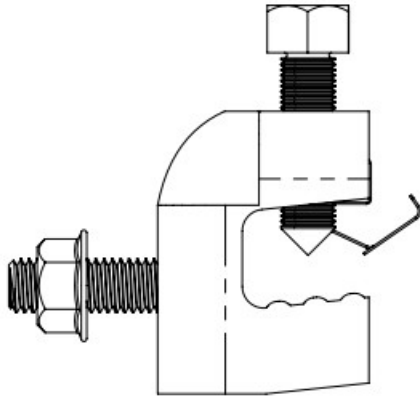


**CSBS1A**

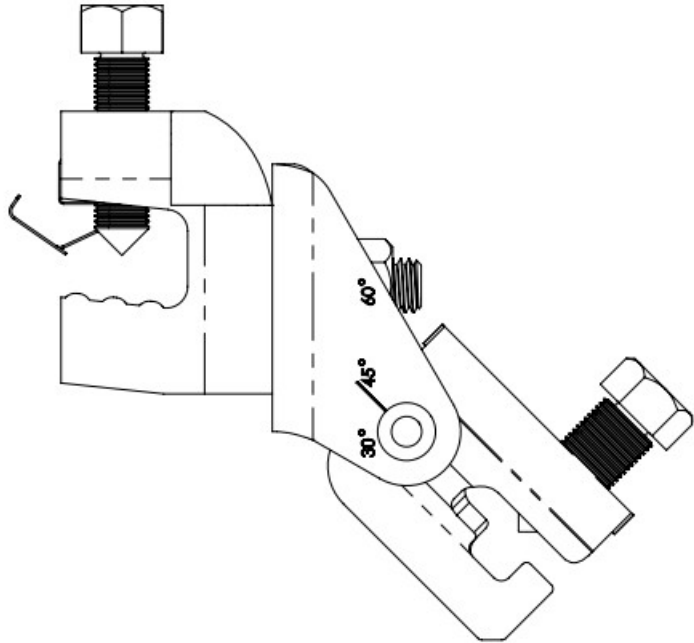


Parallel to Structure  
Perpendicular to Beam

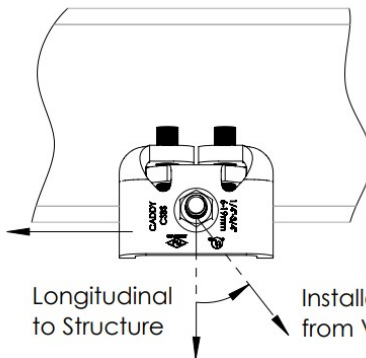

Parallel to Structure  
Parallel to Beam

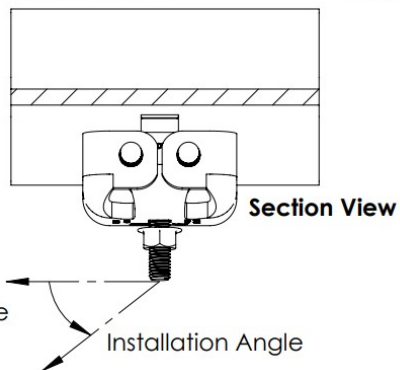

Perpendicular to Structure  
Perpendicular to Beam

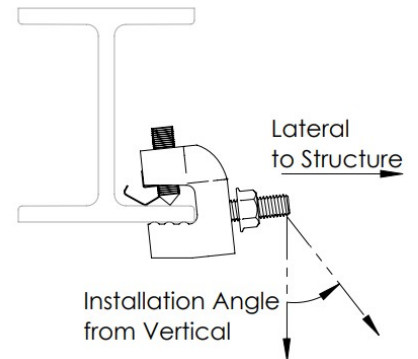

UL Loads (Listed for Structural Attachment)							
Part Number		Structure Attachment Fitting	Flange Thickness		Parallel to Structure Perpendicular to Beam	Perpendicular to Structure Perpendicular to Beam	Parallel to Structure Parallel to Beam
Global	Article		Inch	mm			
CSBS 1	4045 04	CSBUI	1/4 to 5/16	6 to 8	1,500lb (6,672 N)		
			3/8 to 3/4	8 to 19	1,885 lb (8,385 N)		
		CSBURC12	1/4 to 3/4	6 to 19	1,100 lb (4,893 N)		
CSBS 1A	4045 05	CSBUI	1/4 to 5/16	6 to 8	1,500 lb (6,672 N)		
			3/8 to 3/4	8 to 19	1,885 lb (8,385 N)		
CSBS 2	4045 06	CSBU 1	3/4 to 1-1/4	19 to 31	1,704 lb (7580 N)		
		CSBURC12			1,100 lb (4,893 N)		

1. Structure Attachment Fittings are not Included with the CSBS1 or the CSBS2

#### WARNING:

1. nVent products shall be installed and used only as indicated in nVent product instruction sheets and framing materials. Instruction sheets are available at [www.nVent.com](http://www.nVent.com) and from your nVent customer service representative.
2. nVent products must never be used for a purpose other than the purpose for which they were designed or in a manner that exceeds specified load ratings.
3. All instructions must be completely followed to ensure proper and safe installation and performance.
4. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and/or death, and void your warranty.
5. Products that are manufactured using spring steel components shall be used only in a non-corrosive indoor environment.
6. All pipe supports, hangers, intermediate components and structural attachments must ONLY be used as described herein and are NEVER to be used for any other purpose.

**NOTE:** All load ratings are for static conditions and do not account for dynamic loading such as wind, water or seismic loads, unless otherwise noted

The customer is responsible for:

- a. Conformance to all governing codes
- b. The integrity of structures to which the products are attached, including their capability of safely accepting the loads imposed, as evaluated by a qualified engineer.
- c. Using appropriate industry standard hardware as noted above.

#### SAFETY INSTRUCTIONS:

All governing codes and regulations and those required by the job site must be observed.


Always use appropriate safety equipment such as eye protection, hard hat, and gloves as appropriate for the application.

Part Number		Orientation	FM Horizontal Load Ratings			
Global	Article		Installation Angle			
			30° – 44°	45° – 59°	60° – 74°	75° – 90°
CSBS1	404504	Lateral	850 lb (3,780 N)	1780 lb (7,910 N)	2,770 lb (12,320 N)	2,840 lb (12,630 N)
CSBS1A	404505					
CSBS2	404506			1,220 lb (5,420 N)	2,140 lb (9,510 N)	2,580 lb (11,470 N)
CSBS1	404504	Longitudinal	880 lb (3910 N)	1,430 lb (6,360 N)	2,020 lb (8,980 N)	2,410 lb (10,720 N)
CSBS1A	404505					
CSBS2	404506			1,100 lb (4,890 N)	1,820 lb (8,090 N)	2,190 lb (9,740 N)


1. EN 10255 (Heavy), AS 1074 Heavy or JIS G3454 brace pipe.

FM Approved when used with 1", 1-1/4", 1-1/2", or 2" (DN25, DN32, DN40, DN50) NPS Schedule 40, GB/T 3091,


1

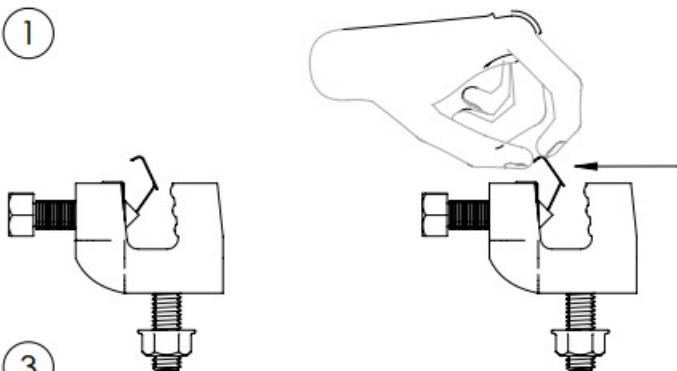


2

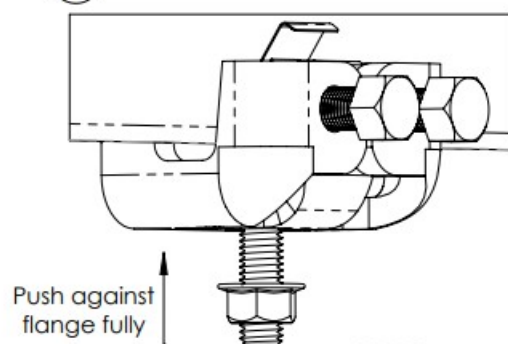


3

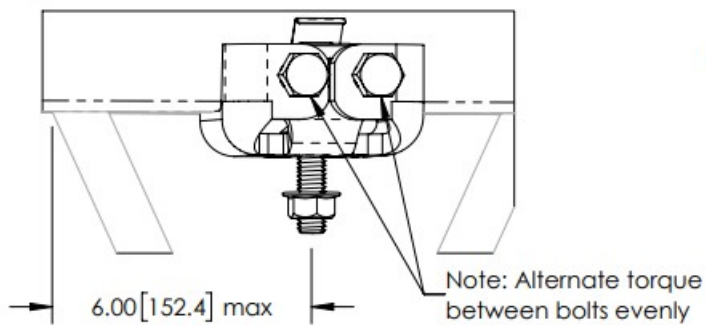


Shear off









4

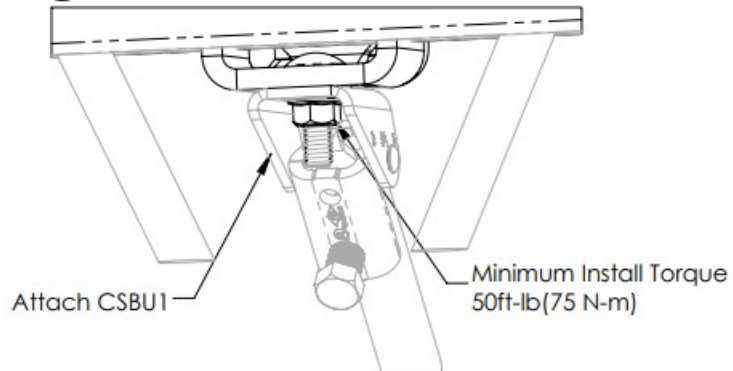

Shear off



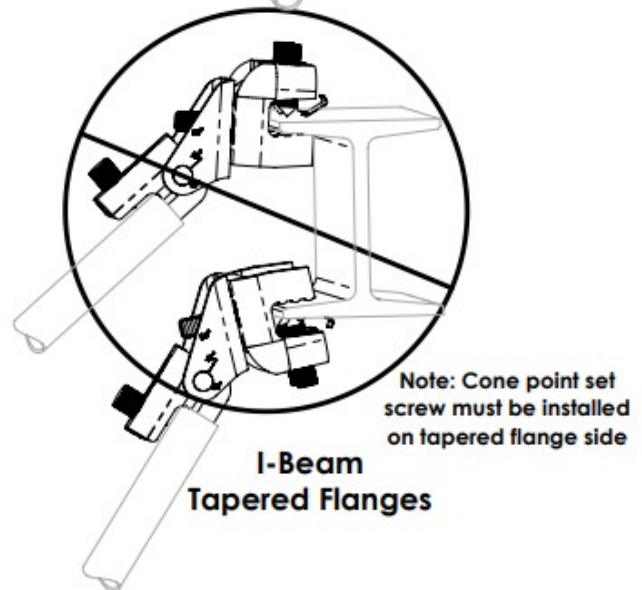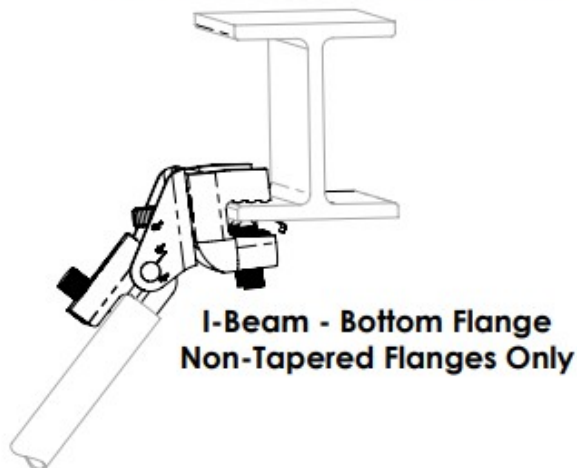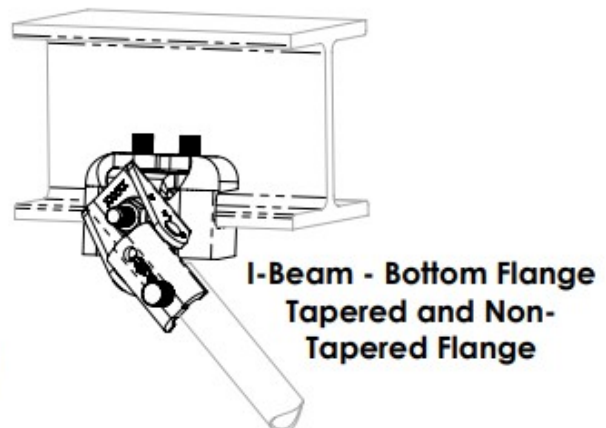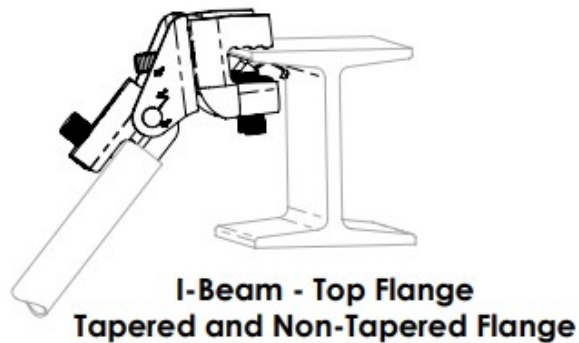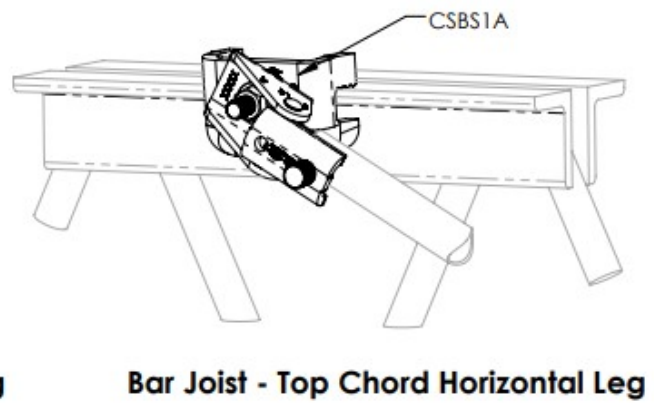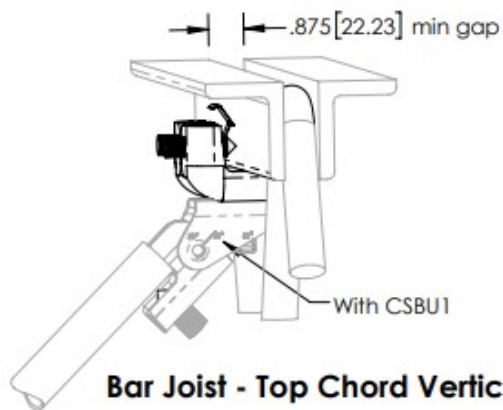

nVent, nVent CADDY, nVent ERICO Cadweld, nVent ERICO Critec, nVent ERICO, nVent ERIFLEX, and nVent LENTON are owned by nVent or its global affiliates. All other trademarks are the property of their respective owners. nVent reserves the right to change specifications without prior notice.



TECHNICAL SUPPORT:


[www.nVent.com](http://www.nVent.com)

CFS541\_G

3 OF 3

© 2016-2020 nVent All Rights Reserved

## Documents / Resources



[nVent CSBS1 Single Side Flange Attachments](#) [pdf] Instructions  
CSBS1 Single Side Flange Attachments, CSBS1, Single Side Flange Attachments, Side Flange Attachments, Flange Attachments

## References

- [🌟 The Future of Connection and Protection | nVent](#)

Manuals+.