



# nVent SLS2C50 Caddy Speed Link SLS Locking Device Owner's Manual

[Home](#) » [nVent](#) » nVent SLS2C50 Caddy Speed Link SLS Locking Device Owner's Manual 

## Contents

- [1 nVent SLS2C50 Caddy Speed Link SLS Locking Device](#)
- [2 FEATURES](#)
- [3 PRODUCT ATTRIBUTES](#)
- [4 ADDITIONAL PRODUCT DETAILS](#)
- [5 DIAGRAMS](#)
- [6 WARNING](#)
- [7 Documents / Resources](#)
  - [7.1 References](#)
- [8 Related Posts](#)



**nVent SLS2C50 Caddy Speed Link SLS Locking Device**



## FEATURES

- Single barrel locking device allows for quick prefabrication of strut or brackets
- Push-on nut quickly and securely installs to strut or bracket to keep the locking device in position and eases installation
- Finger tightening of nut secures the locking device into position without tools
- Installs in strut profiles without the need to insert fingers or tools into the strut
- Push-on nut guides the cable into the locking device and brings stability to the support
- Installs with open side of the strut channel facing up or down for more flexibility


## PRODUCT ATTRIBUTES

- Material: Steel;Polypropylene;Zinc Alloy
- Wire Rope Diameter: 2 mm
- Thread Size: M8
- Height 2: 1.700"
- Height 1: 2.100"
- Width: 0.630"
- Thickness: 0.150" Max
- Hole Size: 0.310" – 0.380"
- Slot Size: 0.31" x 0.25" – 0.31" x 0.38"

## ADDITIONAL PRODUCT DETAILS

- The 2 mm locking device is compatible with C-Channel Types E0 and E0L.
- The 3 mm locking device is compatible with C-Channel Types E1, E2, E2L, E3, E4, E5, Strut Channel Type C, Slotted, Strut Channel Type A, Slotted, Strut Channel Type AS, Perforated, Strut Channel Type CC, Slotted, Strut Channel Type AA, Slotted.
- Locking devices are only to be used with nVent CADDY Speed Link wire spools and accessories with the same specified Wire Rope Diameter as the locking device. Do not use with any other wires.

## DIAGRAMS

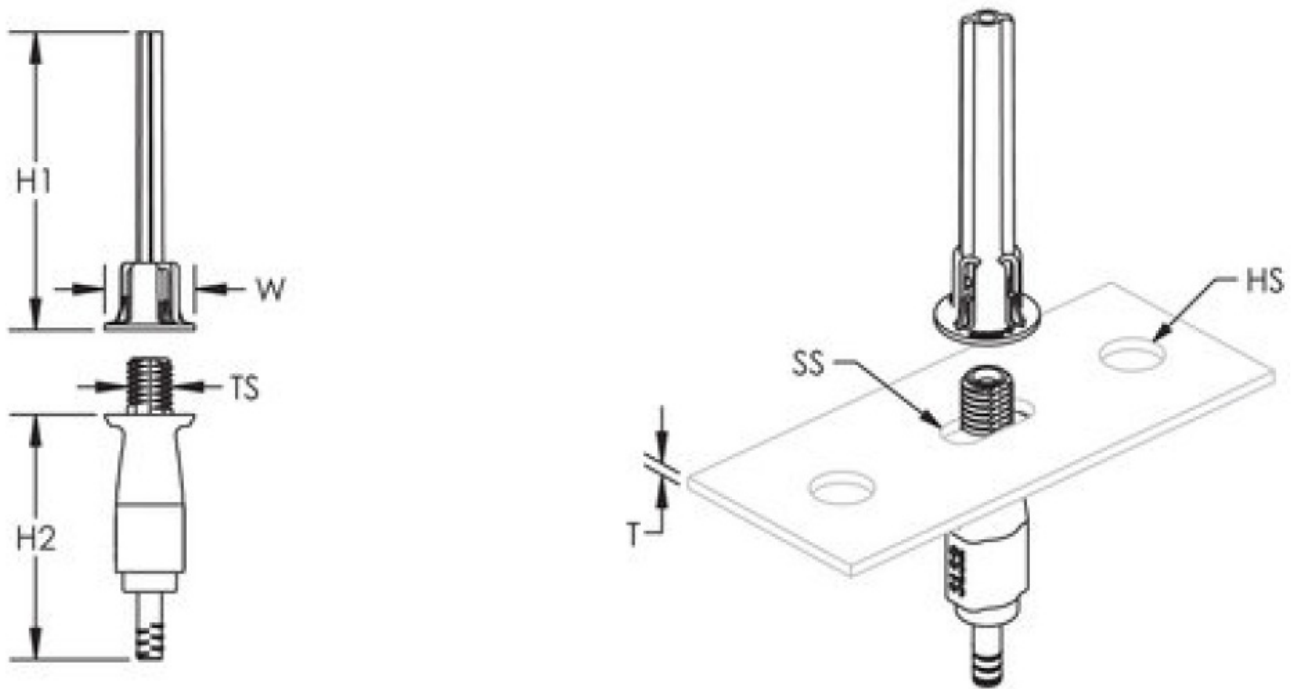

## WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at [www.nvent.com](http://www.nvent.com) and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

### North America

+1.800.753.9221

Option 1 – Customer Care Option 2 – Technical Support.

### Europe Netherlands:

+31 800-0200135 France:

+33 800 901 793

### Europe Germany:


800 1890272 Other Countries: +31 13 5835404

### APAC

Shanghai:

+ 86 21 2412 1618/19 Sydney:  
+61 2 9751 8500

Documents / Resources

	<p><a href="#">nVent SLS2C50 Caddy Speed Link SLS Locking Device</a> [pdf] Owner's Manual SLS2C50, Caddy Speed Link SLS Locking Device, SLS2C50 Caddy Speed Link SLS Locking Device, Speed Link SLS Locking Device, Link SLS Locking Device, SLS Locking Device, Locking Device</p>
---	---

References

-  [The Future of Connection and Protection | nVent](#)
-  [The Future of Connection and Protection | nVent](#)