




NXT POWER NPT2300-X-NS Power Conditioner Instruction Manual

[Home](#) » [NXT POWER](#) » NXT POWER NPT2300-X-NS Power Conditioner Instruction Manual 



Contents

- [1 NPT2300-X-NS Power Conditioner](#)
- [2 Warranty/Support:](#)
- [3 Documents / Resources](#)
 - [3.1 References](#)
- [4 Related Posts](#)

NPT2300-X-NS Power Conditioner



208/240 input VAC 60 Hz Power conditioner Product Specification
(2300 VA) CASE 4


Model No.	NPT2300-X-NS
Part No.	13-00230-XX
Power Rating (VA)	2300
Input Voltage (AC)	208 or 240
Output Voltage (AC)	240/120
Output Current amps (per leg)	9.6
THD	<1% added
Overload rating (amps)	
8 milliseconds	110
1 Second	35
10 Seconds	22
Voltage regulation no load to full load	3%
BTU/hour at full load	235
Safety Listing / compliance	cULus / RoHS
Input Plug	See below
Output Receptacle	See below
Weight (Shipping) lbs	91.0

X = H Hard Wired input and output


NOISE ATTENUATION: When an ANSI/IEEE C62.41 Category A surge is applied in either common or normal mode to the input of the unit <10.0 V normal mode and <0.5 V common mode will be produced on the output. The product employs an isolation

transformer and is a separately derived system. A new neutral to ground bond is established on the output of the power conditioner.

CASE 4 UNIT DIMENSIONS (In inches)

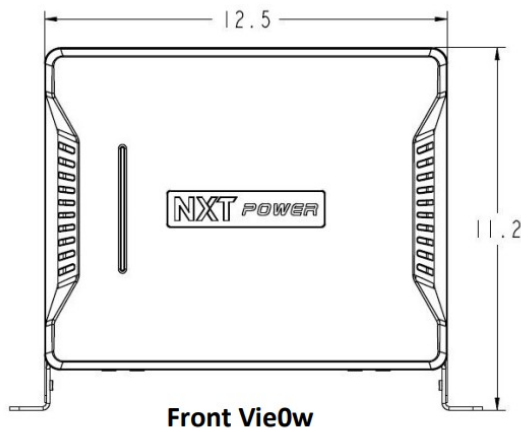

Front View

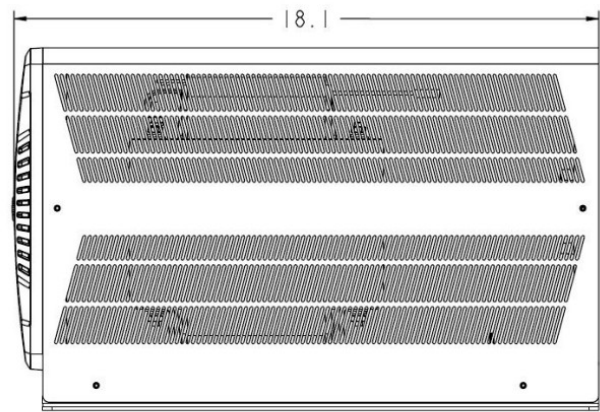

Side View

-XX = For part numbers use the below chart to configure the unit with the correct input voltage, plug and receptacle.

- 01 = 208 VAC input 240/120 out, L14-20P, (1) L14-20R and (2) 5-20R duplex
- 02 = 240 VAC input 240/120 out, L14-20P, (1) L14-20R and (2) 5-20R duplex
- 03 = 208 VAC input 240/120 out, 14-20P, (1) L14-20R and (2) 5-20R duplex
- 04 = 240 VAC input 240/120 out, 14-20P, (1) L14-20R and (2) 5-20R duplex
- 05 = 208 VAC input 240/120 out, L6-20P, (1) L6-20R and (2) 5-20R duplex
- 06 = 240 VAC input 240/120 out, L6-20P, (1) L6-20R and (2) 5-20R duplex
- 07 = 208 VAC input 240/120 out, 6-20P, (1) L6-20R and (2) 5-20R duplex
- 08 = 240 VAC input 240/120 out, 6-20P, (1) L6-20R and (2) 5-20R duplex
- 20 = 208 or 240 VAC input 240/120 out Hard Wired

Warranty/Support:

NXT POWER warrants its power conditioners to be free from defects in materials and workmanship for a period of five years from the date of shipment.


For North American service or support on any NXT POWER product, please contact NXT POWER Technical Support at (877) NXT-POWER or (877) 698-7697 or visit the NXT POWER website at www.nxtpower.com.



022-00055 Rev A (11/20)

www.nxtpower.com

Documents / Resources

	<p>NXT POWER NPT2300-X-NS Power Conditioner [pdf] Instruction Manual NPT2300-X-NS Power Conditioner, NPT2300-X-NS, Power Conditioner, Conditioner</p>
---	---

References

-  [Next-Generation Power Conditioners & UPS Systems | NXT Power](#)

