



OJ ELECTRONICS UDG-4999 Thermostat with Class A GFCI Owner's Manual

[Home](#) » [OJ Electronics](#) » OJ ELECTRONICS UDG-4999 Thermostat with Class A GFCI Owner's Manual 

OJ ELECTRONICS UDG-4999 Thermostat with Class A GFCI



Contents

1	UDG-4999 / USG-4000
2	Efficient, intuitive and stylish
2.1	Approved quality
2.2	Product program
3	Thermostat control
3.1	Class A GFCI
4	Dimension
5	Built-in clock function
6	Individual programming of events
7	Individual programming of events
8	Comfort mode
9	Manual mode
10	Monitoring of energy consumption
11	Temperature limitation
12	Backup function
13	TECHNICAL DATA
14	Customer Support
15	Documents / Resources
15.1	References

UDG-4999 / USG-4000

- Simple user interface and thoughtful installation design
- Pre-programmed for quick set-up
- Monitored energy consumption
- Simple operation – no need for manual
- Class A GFCI for wet room installation U

An “all-in-one” programmable thermostat for electric underfloor heating control where optimal comfort temperature and minimum energy consumption is required.

Efficient, intuitive and stylish

- Simple user interface and thoughtful installation design
- Pre-programmed for quick set-up
- Monitored energy consumption
- Simple operation – no need for manual
- Multi voltage: 120-240 V (incl. 208 V)
- Output relay: 15 A
- Large back-lit display for easy reading
- UDG: single thermostat for all applications (room, floor, room with floor limitation and as regulator)
- Class A GFCI for wet room installation

Approved quality

c-UL-us

GFCI Class A, 5 mA trip level

GFCI disconnects line and neutral (L2)

Product program

UDG-4999 Incl. 2 sensors: built-in air sensor and floor sensor

USG-4000 15 A power module with built-in Class A GFCI

Thermostat control

The thermostat is an electronic on/off thermostat for controlling temperature by means of a sensor placed either externally or built into the thermostat. The heat output is switched on and off with a difference of only 0.7°F (0.4°C).

The thermostat can be configured for control of floor temperature, room temperature or room temperature with limit switch, and regulator without sensor.


It is compatible with existing floor sensors by means of a temperature setting, making it the best thermostat for renovation purposes.

In large applications UDG thermostats can be extended with additional USG power modules. Output can thus be increased by 15 A per USG module. on a lot easier. The OJ Microline app guides the installer and end-user through the few necessary steps to ensure the correct installation and operation of the thermostat. Can be set up with without app.

Class A GFCI

The thermostat features a built-in Class A GFCI (Ground Fault Circuit Interrupter). Should a ground fault occur, the GFCI disconnects both lines to the heating element. The thermostat and GFCI are multi voltage models suitable for 120-240 V (incl 208 V), 50/60 Hz power supplies.

Dimension

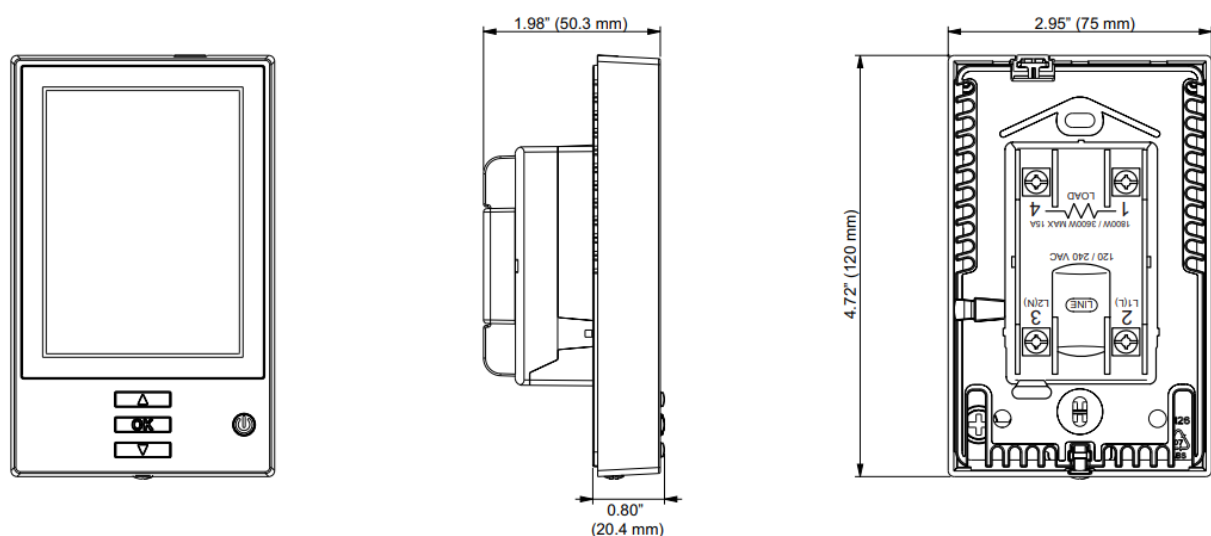

Built-in clock function

The thermostats are supplied with factory-set 4-event program for automatic comfort and set-back temperatures.

Individual programming of events

The factory-set periods and/or temperatures can be changed according to requirements. Furthermore, the following programs can be selected:

- 4 events for 5 days and 2 events for days 6+7
- 4 events for 6 days and 2 events for day 7
- 4 events per day

The programmable thermostat features an adaptive function, allowing it to calculate when the heating must be switched on to ensure that the comfort temperature is reached at the required time.

Individual programming of events

The factory-set periods and/or temperatures can be changed according to requirements.

Comfort mode

The room temperature can be temporarily changed for a single event. The comfort mode temperature is reset after a selected number of hours. The thermostat will then return to the scheduled event program.

Manual mode

The scheduled event program can be cancelled, e.g. during holidays, and the temperature set for frost protection purposes instead, e.g. to 41°F (5°C). The new set-point will remain active until manual mode is cancelled.

Monitoring of energy consumption

Total switch-on time in percent can be displayed for the last 2 days, 30 days or 365 days. Overall energy consumption can thus be monitored.

Temperature limitation

UDG-4999 is supplied with a floor sensor which can be used for:

- Max. temperature limitation: For the protection of wood floors, etc.
- Min. temperature limitation: For better heating comfort.

Backup function

In the event of a power failure, an internal circuit will maintain the programming and time. However, the time must be reset if the power failure exceeds two hours.

TECHNICAL DATA

Supply	120-240 Vac 50/60 Hz
Load	15A maximum (resistive load)
Power	1,800 W at 120 Vac 3,120 W at 208 Vac 3,600 W at 240 Vac
GFCI	Class A (5 mA trip level)
Temperature range	+41 to +104°F (+5 to +40°C)
Floor limit range	+41 to +104°F (+5 to +40°C)
Amb. temp. range	+32 to +104°F (0 to +40°C)
Clock function	4-event program
On/Off differential	0.7°F (0.4°C)
Regulation principle	PWM / PI
Housing	Nema 2 (IP21)
Floor sensor type	NTC (10 K Ω) 15 ft (4.5 m)
Dimensions (H/W/D)	4.72/2.95/0.8 inch (120/75/20 mm)

CUL us listed according to the following standards:

Thermostat: UL 60730-1 UL 60730-2-9 CSA E60730-1:13 CSA E60730-2-9

UL file number: E157297

GFCI: UL 943 4th ed. C22.2 No. 144.1-06

OJ cannot be held liable for any errors in the material. OJ reserves the right to alter its products without notice. This also applies to products already on order, provided that such alterations can be made without requiring subsequent changes in specifications already agreed. The contents of this material may be subject to copyright and other intellectual property rights and is either the property of or used under license by OJ Electronics. The OJ trademark is a registered trademark of OJ Electronics A/S. Google, Android and Google Home are trademarks of Google LLC. Google Assistant is not available in certain languages and countries. Amazon is trademark of Amazon.com Inc. or its affiliates.


© 2022 OJ Electronics A/S

Customer Support

OJ ELECTRONICS A/S
STENAGER 13B
DK-6400 SØNDERBORG
DENMARK
T. +45 73 12 13 14
F. +45 73 12 13 13
OJ@OJELECTRONICS.COM
WWW.OJELECTRONICS.COM



Documents / Resources

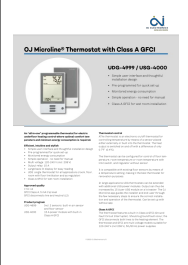	<p>OJ ELECTRONICS UDG-4999 Thermostat with Class A GFCI [pdf] Owner's Manual UDG-4999, USG-4000, UDG-4999 Thermostat with Class A GFCI, UDG-4999, Thermostat with Class A GFCI, Thermostat</p>
---	--

References

- [OJ Know-how Creates Strong Partnerships | OJ Electronics](#)

Manuals+