




OLIGHT Array 2S Headlamp User Manual

[Home](#) » [OLIGHT](#) » OLIGHT Array 2S Headlamp User Manual 

OLIGHT Array 2S Headlamp

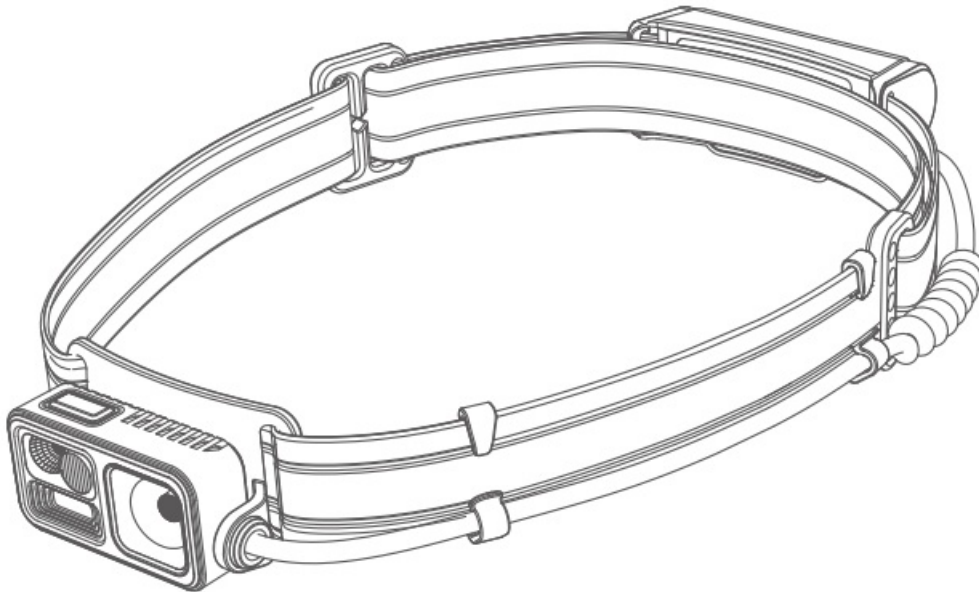

Contents


- 1 Introduction
- 2 IN THE BOX
- 3 SPECIFICATIONS
- 4 SPECIFICATIONS (BATTERY PACK)
- 5 PRODUCT OVERVIEW
- 6 BEFORE FIRST USE
- 7 CHARGING
- 8 DANGER
- 9 HOW TO OPERATE
- 10 WARRANTY
- 11 Customer Service
- 12 Documents / Resources
 - 12.1 References
- 13 Related Posts

Introduction


Thank you for purchasing this Olight Product. Please read this manual carefully before use and keep it for future reference!

IN THE BOX

- Array 2S
(including the headlamp strap and battery pack)

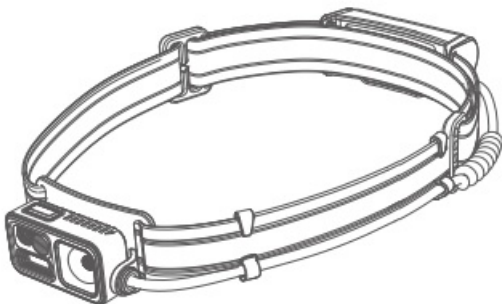


- Type-C USB Cable




SPECIFICATIONS


Flood+Spot Light

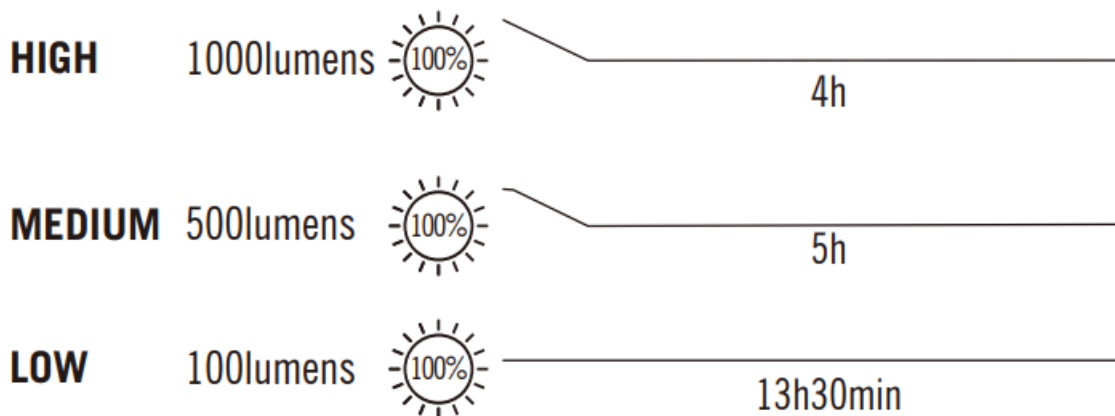



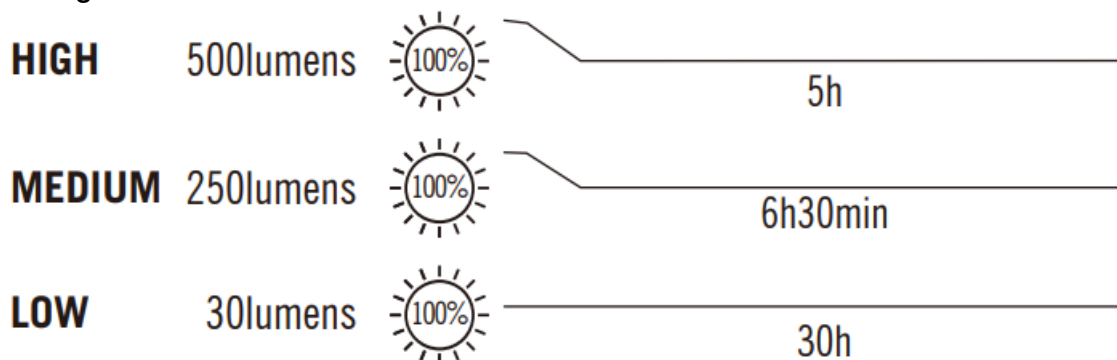

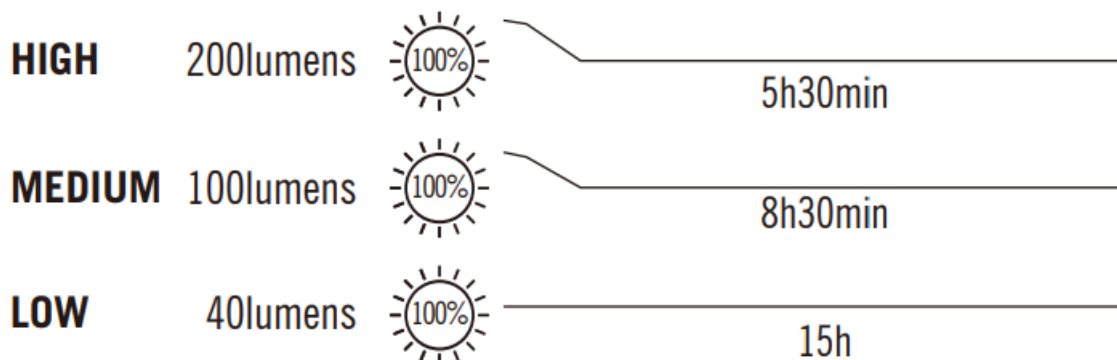


Flood Light



Red Light




			
140m	5,000cd	IPX4	1m
			
61x31x24.5mm (Headlamp) 2.40x1.22x0.96in (Headlamp)	131g / 4.62oz (Including Battery Pack)	2600mAh 3.6V (Battery Pack)	

* All above specifications are test results based on ANSI/NEMA FL1-2009 Standards. The tests are performed using the 2600mAh 3.6V battery pack integrated with the product.

SPECIFICATIONS (BATTERY PACK)


SPECIFICATIONS	DETAILS
INPUT	5V 1A
CHARGING METHOD	Constant Current
MAXIMUM CHARGING CURRENT	1A
FULLY CHARGED VOLTAGE	4.2V
TIME TO FULLY CHARGE	Maximum: 4.5h(5V/1A)

PRODUCT OVERVIEW

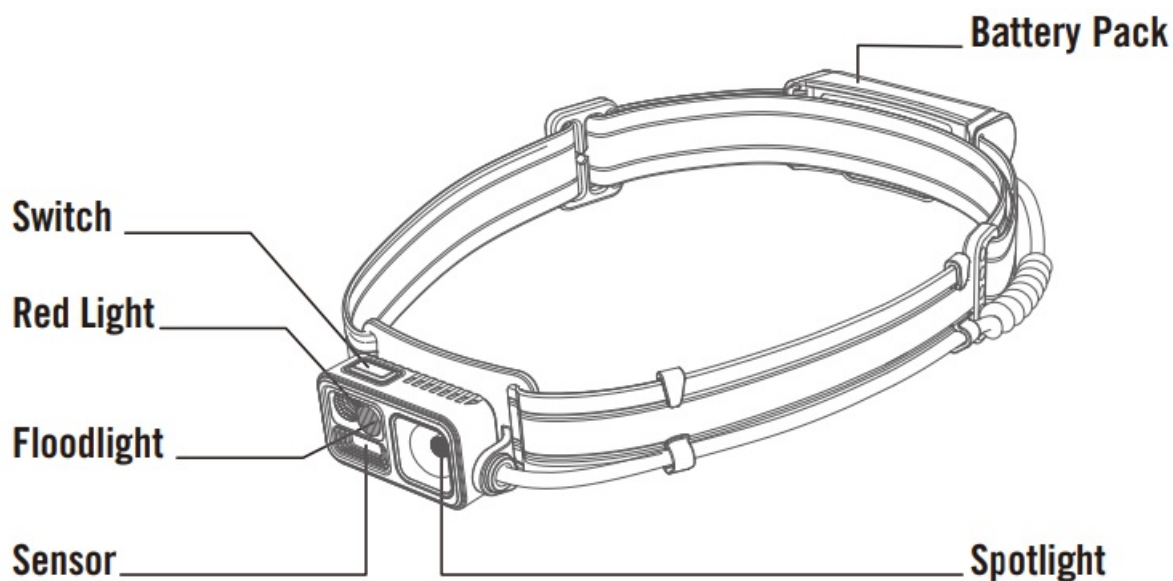

BEFORE FIRST USE

Before your first use, please remove the protective film on the lens. The light arrives in lockout mode for shipping purposes. To unlock, please press and hold the switch (over 1 second).

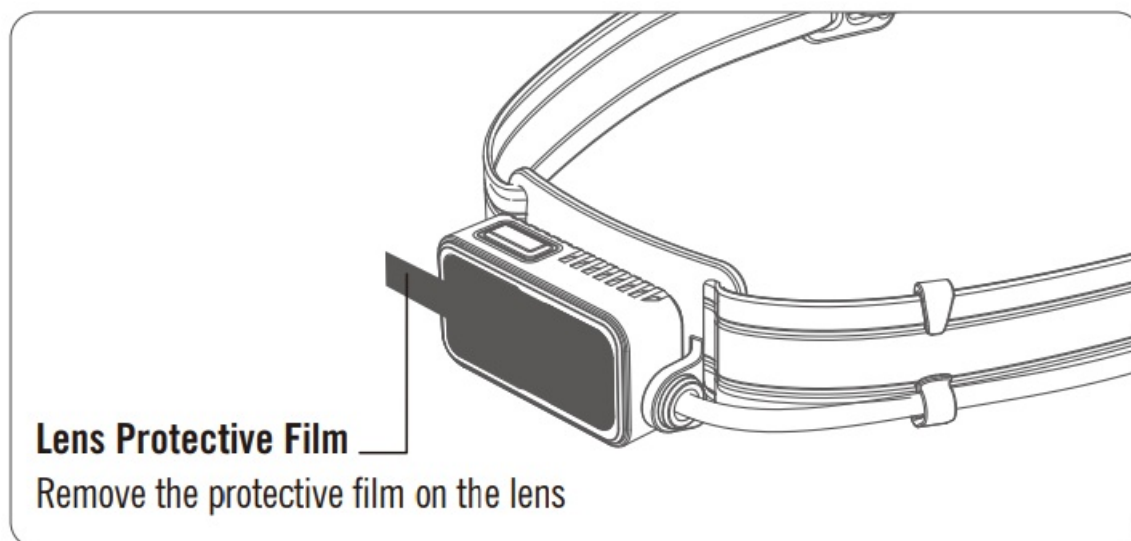


CHARGING

Before first use, please fully charge the battery pack. Remove the charging port protective cover, then connect the

battery pack to the USB adapter or USB charging port via the provided USB A-C charging cable.

The battery pack indicator will flow in red continuously while charging and it will fully light up once it is fully charged. After charging, please remove the cable and close the port cover.

Standard Charging Time: Approx.4.5hrs (5V/1A)

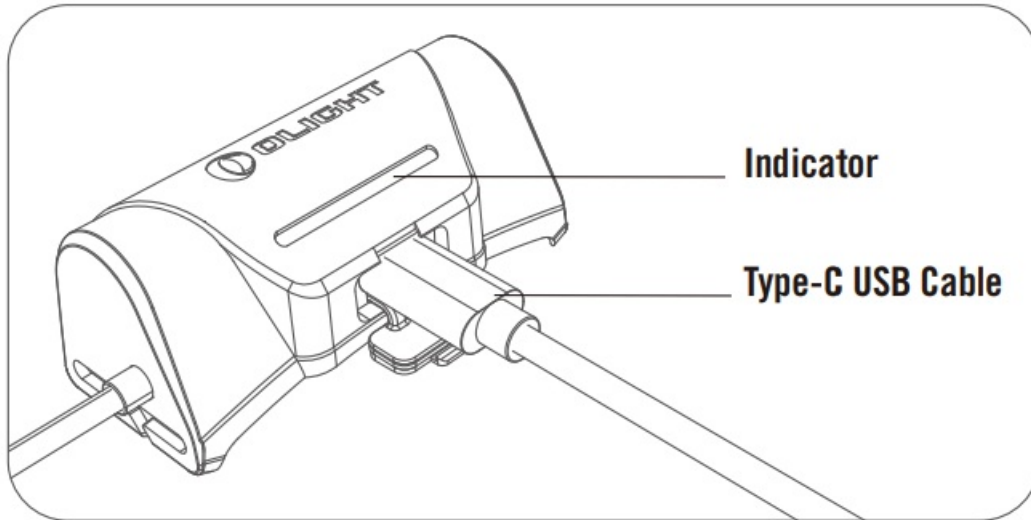

NOTE:

- When the headlamp is on, the battery pack indicator will light up simultaneously for 3 seconds, and then it will flash continuously to remind the battery level.
- It comes without USB power source in the package, please note that it can be charged by PC or any other USB power source with output of 1A or above.
- It takes no more than 4.5 hours to fully charge the light (For reference only).
When the USB power source is insufficient to provide 5V 1A power capacity, the charging time will be longer).

DANGER

- DO NOT shine the light directly into human eyes. This may cause temporary blindness or permanent damage to the eyes.
- DO NOT cover the headlamp when it is on. The heat built-up may cause close objects to burn or even result in unexpected disasters.

WARNING

- Keep out of reach of children.

NOTICE

- If the headlamp is left unused or carried and transported, please lock it to avoid accidentally activating the headlamp.

HOW TO OPERATE

ON/OFF: Single press the headlamp switch to turn on/off, the default output is the last mode when turned off. (Please note: SOS is not memorized).

CHANGE BRIGHTNESS LEVEL: When the headlamp is on, press and hold the switch to change brightness level. The output brightness will cycle through Low→Medium→ High→Low... until the switch is released.

CHANGE MODE: When the headlamp is on, double click the switch to cycle through floodlight light→floodlight and spotlight mixed→red light→floodlight...

SOS: In the unlocked state, quickly triple click the switch to enter the SOS mode and single click to return the previous mode.

LOCKOUT: When the headlamp is off, press and hold the switch (over 1 second) to access the lockout mode.

UNLOCK: Press and hold the switch (over 1 second) to unlock. When unlocking, it will output the low floodlight.

HAND WAVE CONTROL: When the headlamp is on, wave hand to the left, the spotlight will turn off; wave hand to the right, the spotlight will turn on. Wave up to increase the brightness level and wave down to decrease the brightness level. Not applicable when switching between red light and the white light with a hand gesture and it will have no response when waving in SOS mode.

WARRANTY

Within 30 days of purchase: Contact the original seller for repair or replacement.

Within 2 years of purchase: Contact Olight for repair or replacement.

Battery Pack: one year.

This warranty does not cover normal wear and tear, modifications, misuse, disintegrations, negligence, accidents, improper maintenance, or repair by anyone other than an authorized retailer or Olight itself.

EU DECLARATION OF CONFORMITY



EU-Declaration of Conformity can be found here:

<https://olightworld.com/ec-declaration>

Customer Service

USA Customer Support

cs@olightstore.com

Global Customer Support

customer-service@olightworld.com

Visit www.olightworld.com to see our complete product line of portable illumination tools.


Dongguan Olight E-Commerce Technology Co., Ltd

4th Floor, Building 4, Kegu Industrial Park, No 6 Zhongnan Road, Changan Town, Dongguan City, Guangdong, China.

Made in China



Documents / Resources



[OLIGHT Array 2S Headlamp](#) [pdf] User Manual
Array 2S Headlamp, Array 2S, Headlamp

References

- [Olightworld.com.Olight Flashlights, Tactical Light, Outdoor Light, Weapon Light](#)
- [Olightworld.com.Olight Flashlights, Tactical Light, Outdoor Light, Weapon Light](#)