




Omega MOD16370915 Sub-1G Module User Guide

[Home](#) » [Omega](#) » Omega MOD16370915 Sub-1G Module User Guide 



MOD-16370-915
Sub-1G Module User Guide
OMEGA Engineering, Inc. v1.0

Federal Communication Commission Interference Statement

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Radiation Exposure Statement: This equipment complies with FCC radiation exposure limits set forth for an

uncontrolled environment. This equipment should be installed and operated with a minimum distance of 23cm between the radiator & your body.

This module is intended for OEM integrators only. Per FCC KOB 996369 003 OEM Manual v01 guidance, the following conditions must be strictly followed when using this certified module: KOB 996369 D03 OEM Manual v01 rule sections: 2.2 List of applicable FCC rules This module has been tested for compliance to FCC Part 15

2.3 Summarize the specific operational use conditions

The module is tested for standalone mobile RF exposure use conditions. Any other usage conditions such as co-location with another transmitter (s) or being used in a portable condition will need a separate reassessment through a class II permissive change application or new certification.

2.4 Limited module procedures

Not applicable.

2.5 Trace antenna designs

Not applicable.

2.6 RF exposure considerations

This equipment complies with FCC mobile radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 23cm between the radiator & your body. If the module is installed in a portable host, a separate SAR evaluation is required to confirm compliance with relevant FCC portable RF exposure rules.

2.7 Antennas

The following antennas have been certified for use with this module; antennas of the same type with equal or lower gain may also be used with this module. The antenna must be installed such that 23cm can be maintained between the antenna and users.

No.	Antenna Type	Model	Connector	Gain(dBi)
1	Rubber Duck Antenna	HG905RD-RSP	SMA	5
2	Omnidirectional Antenna	HG908U-PRO	N-Female	8
3	Heavy Duty Flat Panel Antenna	HG8909P	N-Female	9
4	Yagi Antenna	HG912YE	N Female	12
5	Omnidirectional Antenna	RFDPA171300SBRB804	RP-SMA	2

2.8 Label and compliance information

The final end product must be labeled in a visible area with the following: "Contains FCC ID: WR3MOD16370915". The grantees FCC ID can be used only when all FCC compliance requirements are met.

2.9 Information on test modes and additional testing requirements

This transmitter is tested in a standalone mobile RF exposure condition and any co-located or simultaneous transmission with another transmitter (s) or portable use will require a separate class II permissive change re-evaluation or new certification.

2.10 Additional testing, Part 15 Subpart 8 disclaimer

This transmitter module is tested as a subsystem and its certification does not cover the FCC Part 15 Subpart B (unintentional radiator) rule requirement applicable to the final host. The final host will still need to be reassessed for compliance to this portion of rule requirements if applicable. As long as all conditions above are met, further transmitter test will not be required. However, the OEM integrator is still responsible for testing their end-product for any additional compliance requirements required with this module installed.

IMPORTANT NOTE: In the event that these conditions can not be met (for example certain laptop configurations or co-location with another transmitter), then the FCC authorization is no longer considered valid and the FCC ID can not be used on the final product. In these circumstances, the OEM integrator will be responsible for re-evaluating the end product (including the transmitter) and obtaining a separate FCC authorization.

Manual Information To the End User

The OEM integrator has to be aware not to provide information to the end-user regarding how to install or remove this RF module in the user's manual of the end product which integrates this module. The end-user manual shall include all required regulatory information/warning as show in this manual.

OEM/Host manufacturer responsibilities

OEM/Host manufacturers are ultimately responsible for the compliance of the Host and Module. The final product

must be reassessed against all the essential requirements of the FCC rule such as FCC Part 15 Subpart B before it can be placed on the US market. This includes reassessing the transmitter module for compliance with the Radio and EMF essential requirements of the FCC rules. This module must not be incorporated into any other device or system without retesting for compliance as multi-radio and combined equipment.

Industry Canada statement

This device complies with ISED's license-exempt RSSs. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Radiation Exposure Statement:

This equipment complies with ISED radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with greater than 34 m between the radiator & your body.

This device is intended only for OEM integrators under the following conditions: (For module device use)

1. The antenna must be installed and operated with greater than 34cm between the antenna and users
2. The transmitter module may not be co-located with any other transmitter or antenna.
3. Module approval valid only when the module is installed in the tested host or compatible series of host which have similar RF exposure characteristics with equal or larger antenna separation distance. As long as 3 conditions above are met, further transmitter test will not be required. However, the OEM integrator is still responsible for testing their end-product for any additional compliance requirements required with this module installed.

Cet appareil est conçu uniquement pour les intégrateurs OEM dans les conditions suivantes: (Pour utilisation de dispositif module)

IMPORTANT NOTE: In the event that these conditions can not be met (for example certain laptop configurations or co-location with another transmitter), then the Canada authorization is no longer considered valid and the IC ID can not be used on the final product. In these circumstances, the OEM integrator will be responsible for re-evaluating the end product (including the transmitter) and obtaining a separate Canada authorization.

End Product Labeling

This transmitter module is authorized only for use in devices where the antenna may be installed and operated with greater than 34cm between the antenna and users. The final end product must be labeled in a visible area with the following: "Contains IC: 8205A-M0D16370915".

Manual Information To the End-User

The OEM integrator has to be aware not to provide information to the end-user regarding how to install or remove this RF module in the user's manual of the end product which integrates this module. The end-user manual shall include all required regulatory information/warning as show in this manual.

DETACHABLE ANTENNA USAGE

This radio transmitter (IC: 8205A-M0D16370915 / Model: MOD-16370-915) has been approved by ISED to operate with the antenna type listed below with maximum permissible gain indicated. Antenna types not included in this list, having a gain greater than the maximum gain indicated for that type, are strictly prohibited for use with this device.

Approved antennas list:

No.	Antenna Type	Model	Connector	Gain(dBi)
1	Rubber Duck Antenna	HG905RD-RSP	SMA	5
2	Omnidirectional Antenna	HG908U-PRO	N-Female	8
3	Heavy Duty Flat Panel Antenna	HG8909P	N-Female	9
4	Yagi Antenna	HG912YE	N Female	12
5	Omnidirectional Antenna	RFDPA171300SBRB804	RP-SMA	2

Contents


- [1 Professional installation instruction](#)
- [2 Description](#)
- [3 Mechanical Drawing](#)
- [4 Specifications](#)
- [5 Terminal Description](#)
- [6 Documents / Resources](#)
- [7 Related Posts](#)

Professional installation instruction


1. Installation personnel This product is designed for a specific applications and needs to be installed by a qualified person who has RF and related rule knowledge. The general user shall not attempt to install or change the setting.
2. Installation location The product shall be installed at a location where the radiating antenna can be kept 34cm from a nearby person in normal operating conditions to meet regulatory RF exposure requirements.
3. External antenna Use only the antennas which have been approved by the applicant. The non-approved antenna(s) may produce unwanted spurious or excessive RF transmitting power which may lead to the violation of FCC/IC limit and is prohibited.
4. Installation procedure Please refer to user's manual for the detail.
5. Warning Please carefully select the installation position and make sure that the final output power does not exceed the limit set force in relevant rules. The violation of the rule could lead to a serious federal penalty.

Description

MOD-16370-915 Module is designed by a high-performance ultra-low power RF transceiver, intended for RF wireless applications in the sub-1 GHz band. And is operating in the license-free ISM bands

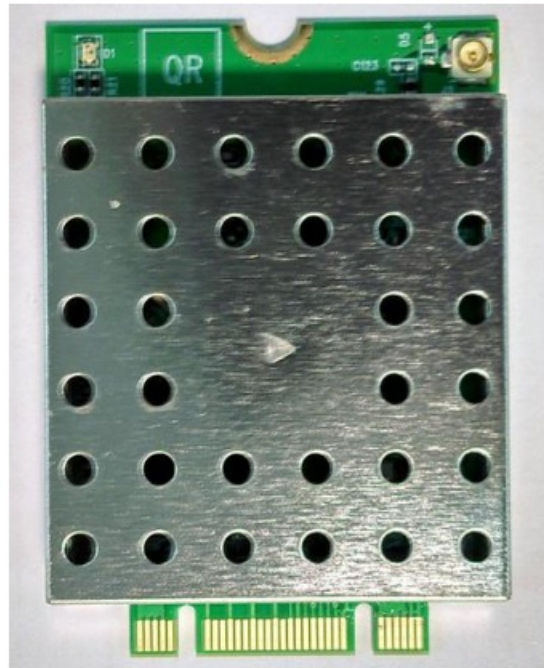

Mechanical Drawing

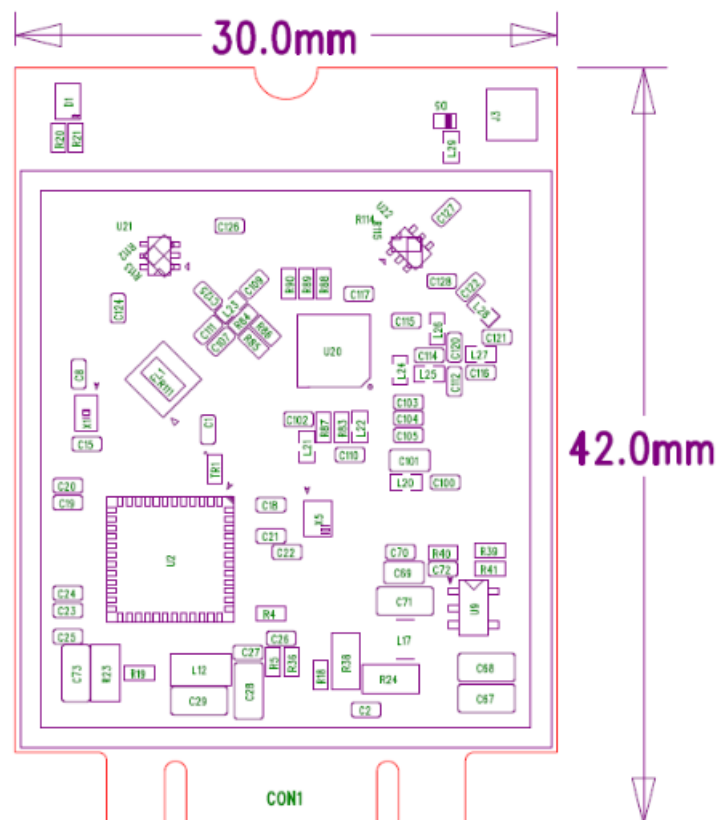

Specifications


Operating Frequency	902.4 – 927.6MHz
Power Supply Rating	3.3VDC
Modulation Type	2-GFSK
Number of Channel	127
Output Power	242.661mW
Antenna Type	Refer to Note
Operating Temperature	-20°C – +60°C;

Note: Following Antennas were provided for selection

No.	Antenna Type	Model	Connector	Gain(dBi)
1	Rubber Duck Antenna	HG905RD-RSP	SMA	5
2	Omnidirectional Antenna	HG908U-PRO	N-Female	8
3	Heavy Duty Flat Panel Antenna	HG8909P	N-Female	9
4	Yagi Antenna	HG912YE	N Female	12
5	Omnidirectional Antenna	RFDPA171300S BRB804	RP-SMA	2



Terminal Description

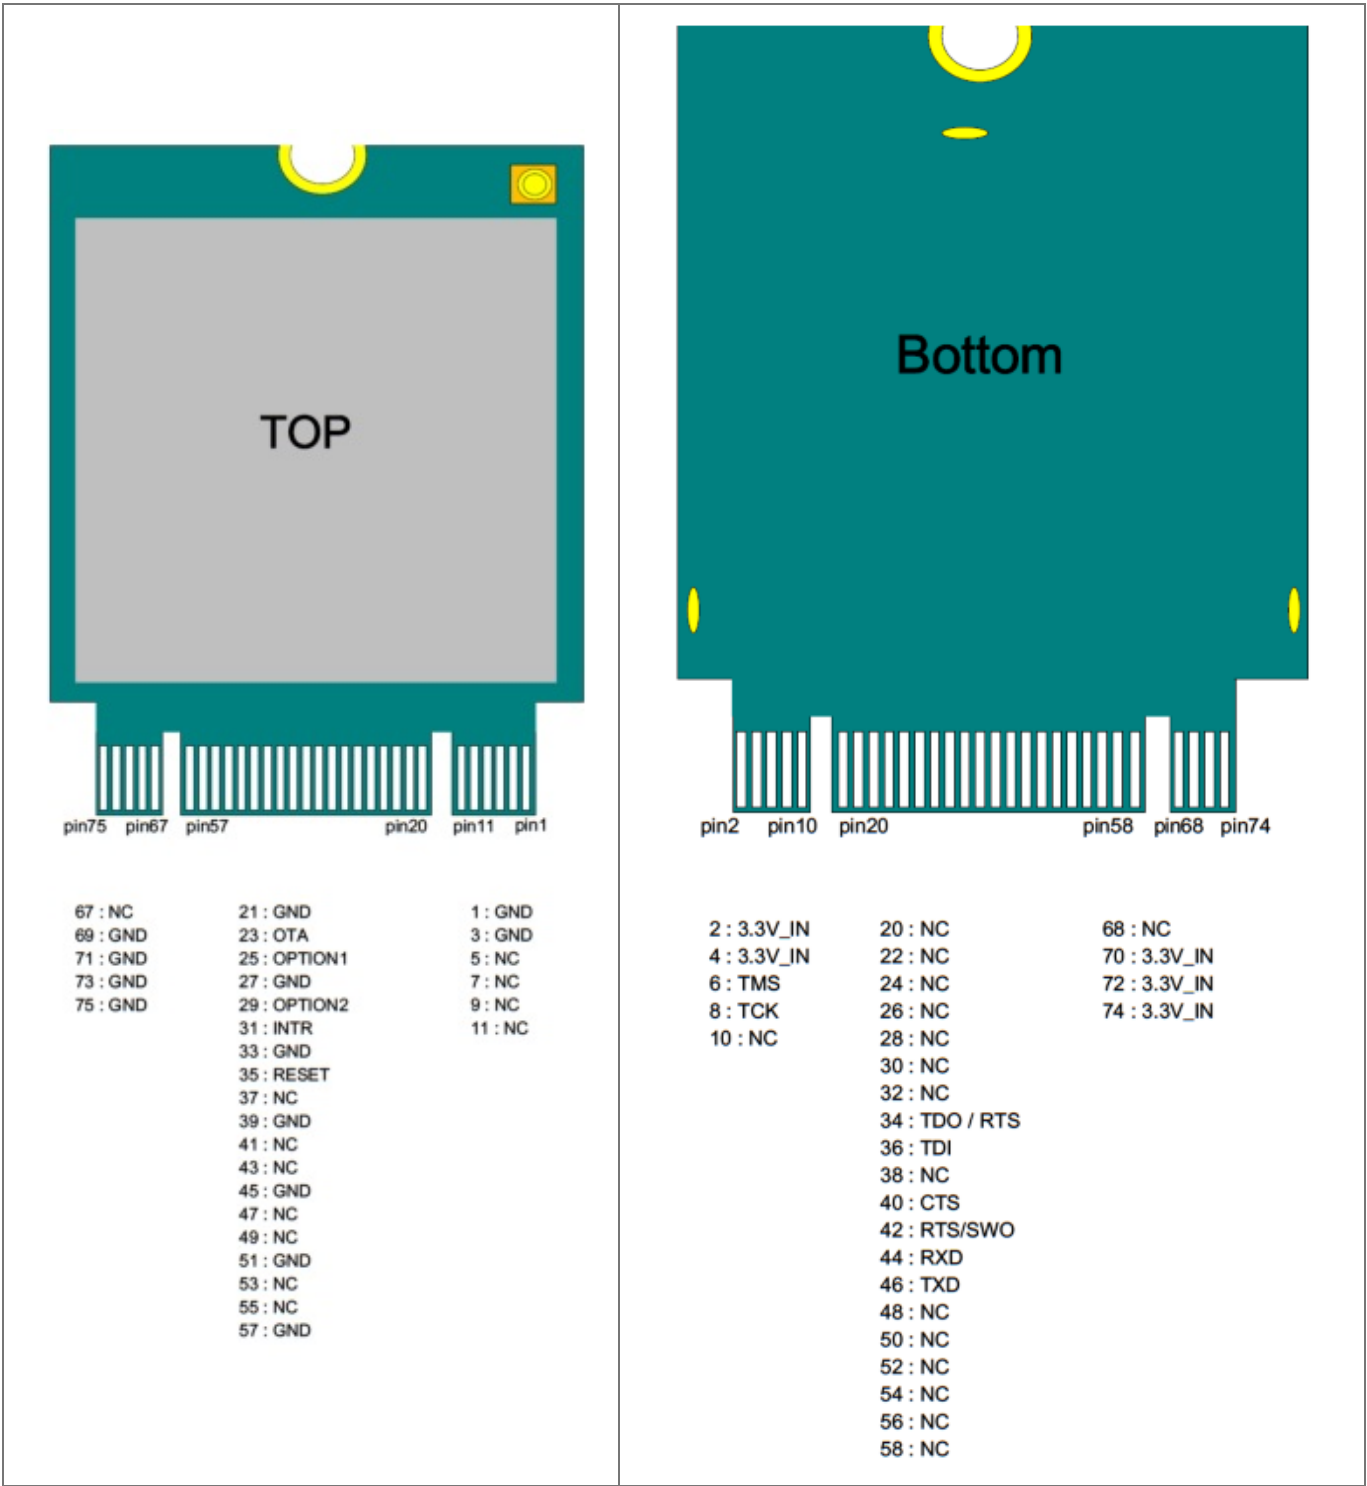

Documents / Resources

<p>MOD 16370 915 Sub-1G Module User Guide</p> <p>OMEGA Engineering, Inc. 10</p>	<p>Omega MOD16370915 Sub-1G Module [pdf] User Guide MOD16370915 Sub-1G Module, Sub-1G Module</p>
---	--