



## OMNIVISION OV64A 64MP Sensor User Guide

[Home](#) » [OMNIVISION](#) » OMNIVISION OV64A 64MP Sensor User Guide 



available in a lead-free package

## Contents

- [1 OV64A 64MP Sensor](#)
- [2 Applications](#)
- [3 Product Features](#)
- [4 Ordering Information](#)
- [5 Technical Specifications](#)
- [6 Functional Block Diagram](#)
- [7 Documents / Resources](#)
- [8 Related Posts](#)

## OV64A 64MP Sensor

### World's First 1.0 Micron 64MP Image Sensor with Large Optical Format for Best Low Light Performance in High-End Mobile Phones

OmniVision's OV64A is a high-performance 64-megapixel (MP) image sensor with the largest pixel size in its class, at 1.0 microns, along with a class-leading optical format of 1/1.34". Compared with OmniVision's 0.8-micron 64MP image sensor, the OV64A's 1.0-micron pixel size provides a more than 60% sensitivity increase. These large optics and high resolution provide the greatest possible performance in low light conditions for the wide and ultrawide main cameras in high-end smartphones.

Built on OmniVision's PureCel®Plus-S stacked die technology, the OV64A integrates an on-chip, 4-cell (4C) color filter array, and hardware premosaic, providing high quality, 64MP Bayer output, or 8K video, in real-time. In low light conditions, this sensor can use near-pixel binning to output a 16MP image for 4K2K video with four times the sensitivity, yielding 2.0 micron-equivalent low-light performance for preview and video.

The OV64A features 3-exposure, 4-cell HDR with on-chip combination and tone mapping, as well as a very fast frame rate, which works in tandem to eliminate motion artifacts and produce the best 64MP signal-to-noise ratio (SNR). This sensor also offers a 2- and 3-exposure staggered HDR timing option, providing smartphone designers with maximum flexibility to select the best HDR method for a given scene. Output formats include 64MP at 15 frames per second (fps), 16MP with 4C Binning at 60 fps, and 4K2K videos at 120 fps with the extra pixels needed for electronic image stabilization. In addition, this sensor offers 8K video at 30 fps, 1080p at 240 fps, and 720p at 480 fps. Other features include CPHY and DPHY interfaces, and 4C half-shield phase detection for fast autofocus support.

Find out more at [www.ovt.com](http://www.ovt.com).



<https://www.ovt.com/sensors/OV64A>

## Applications

- Smart Phones
- Video Conferencing
- PC Multimedia

## Product Features

- automatic black level calibration (ABLC)
- programmable controls for:
  - frame rate

- mirror and flip
- binning
- cropping
- windowing
- support for dynamic DPC supports horizontal and
- vertical subsampling
- supports typical images sizes:
  - 9248 x 6944
  - 7680 x 4320
  - 4656 x 3496
  - 4608 x 2592
  - 3840 x 2160
  - 1920 x 1080
  - 1280 x 720
- standard serial SCCB interface
- up to 4-lane MIPI TX interface
  - with speed up to 3.0 Gbps/lane
- 2/3 trio CPHY interface, up to 2.45 Gbps/trio
- supports type 2 4C HS PDAF
- 4-cell support:
  - 4-cell binning
  - 4-cell full
- HDR support: stagger HDR 2/3 exposure timing 4C HDR with an on-chip combination
- on-chip 4-cell to Bayer converter
- three on-chip phase lock loops (PLLs)
- programmable I/O drive capability
- built-in temperature sensor
- on-chip digital scalar

## Ordering Information


- OV64A40-GA5A-002A (color, chip probing, 150 µm backgrounding, reconstructed wafer with good die)

## Technical Specifications

- active array size: 9248 x 6944
- maximum image transfer rate:
  - 9248 x 6944: 15 fps
- power supply:
  - core: 1.1V
  - analog: 2.8V
  - I/O: 1.8V
- power requirements:

- active: ~765 mV (64MP @ 15 fps)
- standby: <10  $\mu$ W
- output formats: 10-bit HDR RGB RAW
- temperature range:
  - operating: -30°C to +85°C junction temperature
  - stable: 0°C to +60°C junction temperature
- lens size: 1/1.32"
- lens chief ray angle: 37.43° non-linear
- scan mode: progressive
- pixel size: 1.008  $\mu$ m x 1.008  $\mu$ m
- image area:
  - 9354.24  $\mu$ m x 7031.808  $\mu$ m

## Functional Block Diagram

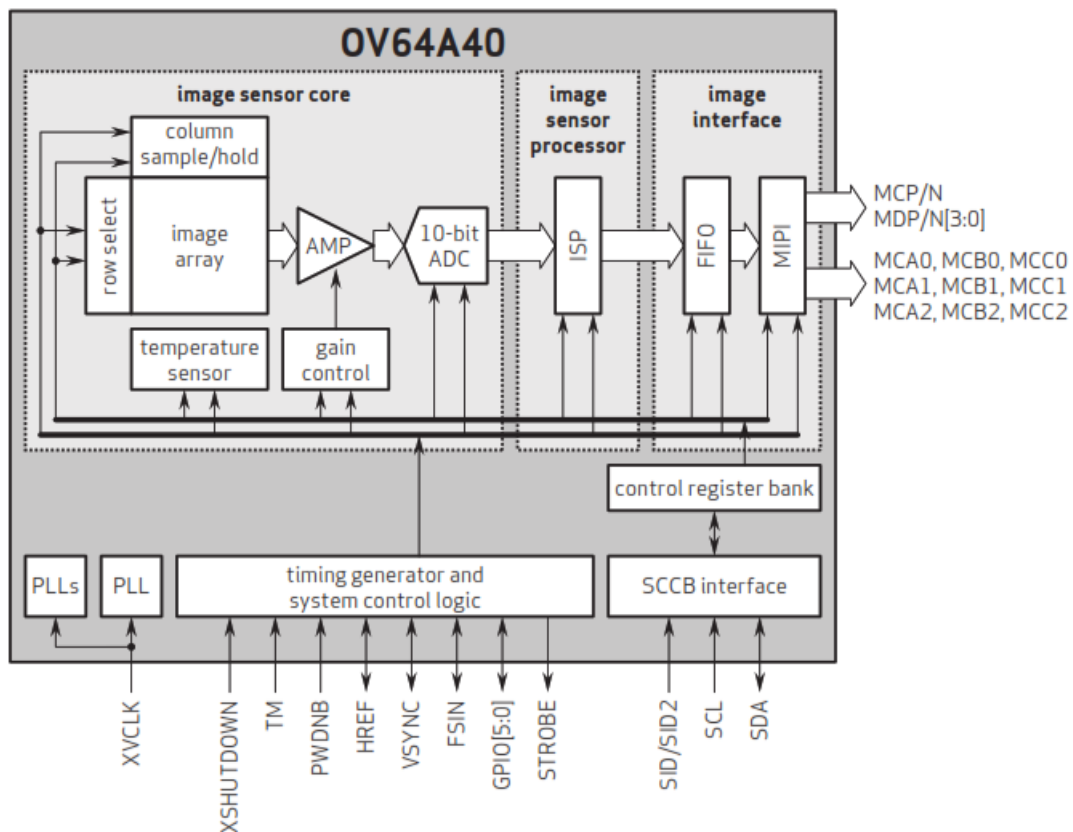

4275 Burton Drive  
Santa Clara, CA 9505  
4  
USA

Tel: + 1 408 567 3000  
Fax: + 1 408 567 300  
1  
[www.ovt.com](http://www.ovt.com)

OmniVision reserves the right to make changes to its products or to discontinue any product or service without further notice. OmniVision, the OmniVision logo, and PureCel are registered trademarks of OmniVision Technologies, Inc. All other trademarks are the property of their respective owners.



## Documents / Resources



[OMNIVISION OV64A 64MP Sensor](#) [pdf] User Guide  
OV64A 64MP Sensor, 64MP Sensor, OV64A Sensor, Sensor