




## OmniVision WL2803E Ultra Low Dropout Instructions


[Home](#) » [OMNIVISION](#) » OmniVision WL2803E Ultra Low Dropout Instructions 

### Contents

- [1 OmniVision WL2803E Ultra Low Dropout](#)
- [2 Descriptions](#)
- [3 Features](#)
- [4 Applications](#)
- [5 Package outline dimensions](#)
- [6 TAPE AND REEL INFORMATION](#)
- [7 ORDER INFORMATION](#)
- [8 Documents / Resources](#)
- [9 Related Posts](#)



**OmniVision WL2803E Ultra Low Dropout**

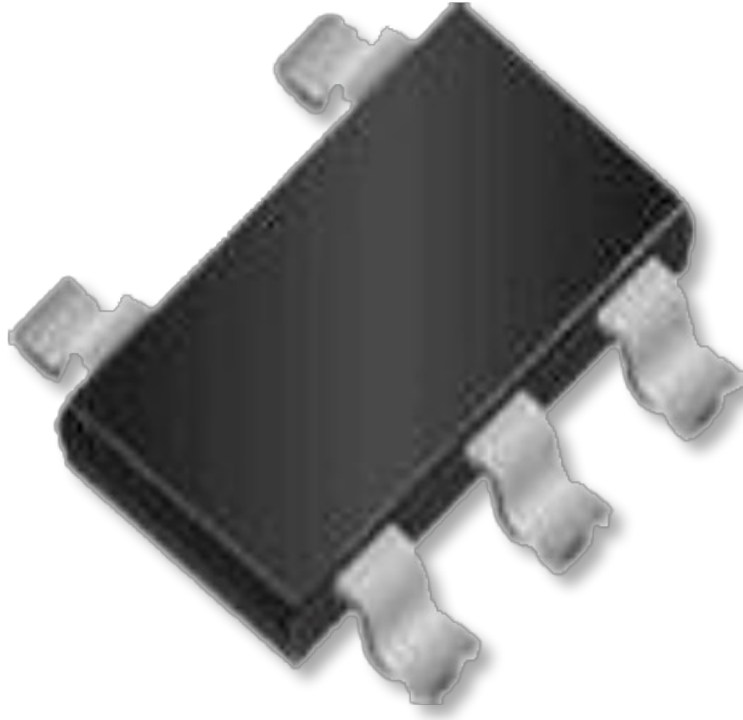

## Descriptions


The WL2803E series are ultra low dropout, Low quiescent current, high PSRR CMOS LDO. The dropout voltage is 130mV (Typ.) at 500mA load current. Using CMOS construction, the quiescent current consumed by the WL2803E is typically 150uA over the entire input voltage range, making it attractive for consumer, networking applications that demand high output current. The WL2803E series are available in wide output voltage range version from 1.2V to 3.3V with 0.1V step. The WL2803E series offer thermal shutdown (OTP) and current limit functions, to assure the stability of chip and power system at wrong condition, and it uses trimming technique to guarantee output voltage accuracy within  $\pm 2\%$ . The WL2803E regulators are available in SOT-23-5L packages. Standard products are Pb-free and Halogen-free.

## Features


- **Input voltage** : 2.5V~5.5V
- **Output voltage** : 1.2V~3.3V
- **Output current** : 500mA
- **PSRR** : 65dB @ 1KHz
- **Dropout voltage** : 130mV @ IOUT=0.5A
- **Output noise** : 100uV
- **Quiescent current** : 150 $\mu$ A Typ.

## Applications

- LCD TV
- STB
- Computer, Graphic card
- Network communication equipments
- Others portable electronics devices

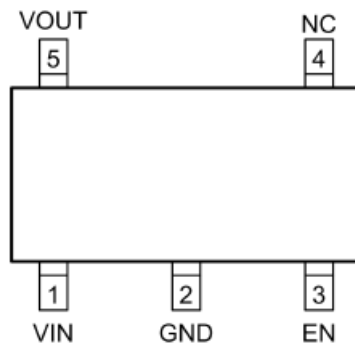

### Pin Configuration (Top View)

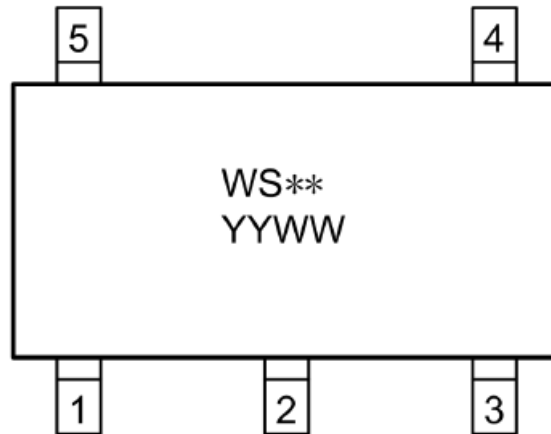


- **WS** = Device code
- **\*\*** = Voltage code (33: 3.3V)
- **YY** = Year code
- **WW** = Week code

### Order Information


For detail information, Please refer to page 9.

### Typical Application

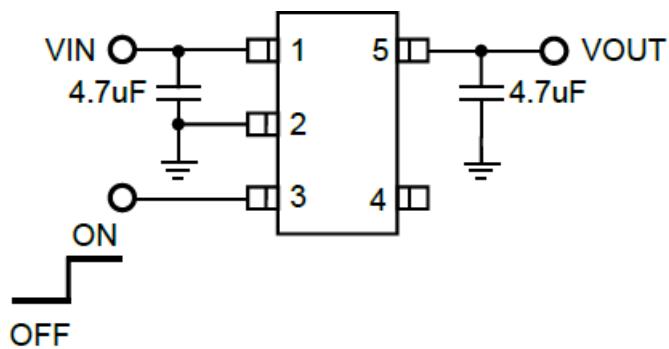

When the output is less than 2V, it is recommended that the Cout is more than 10uF.

### Block Diagram

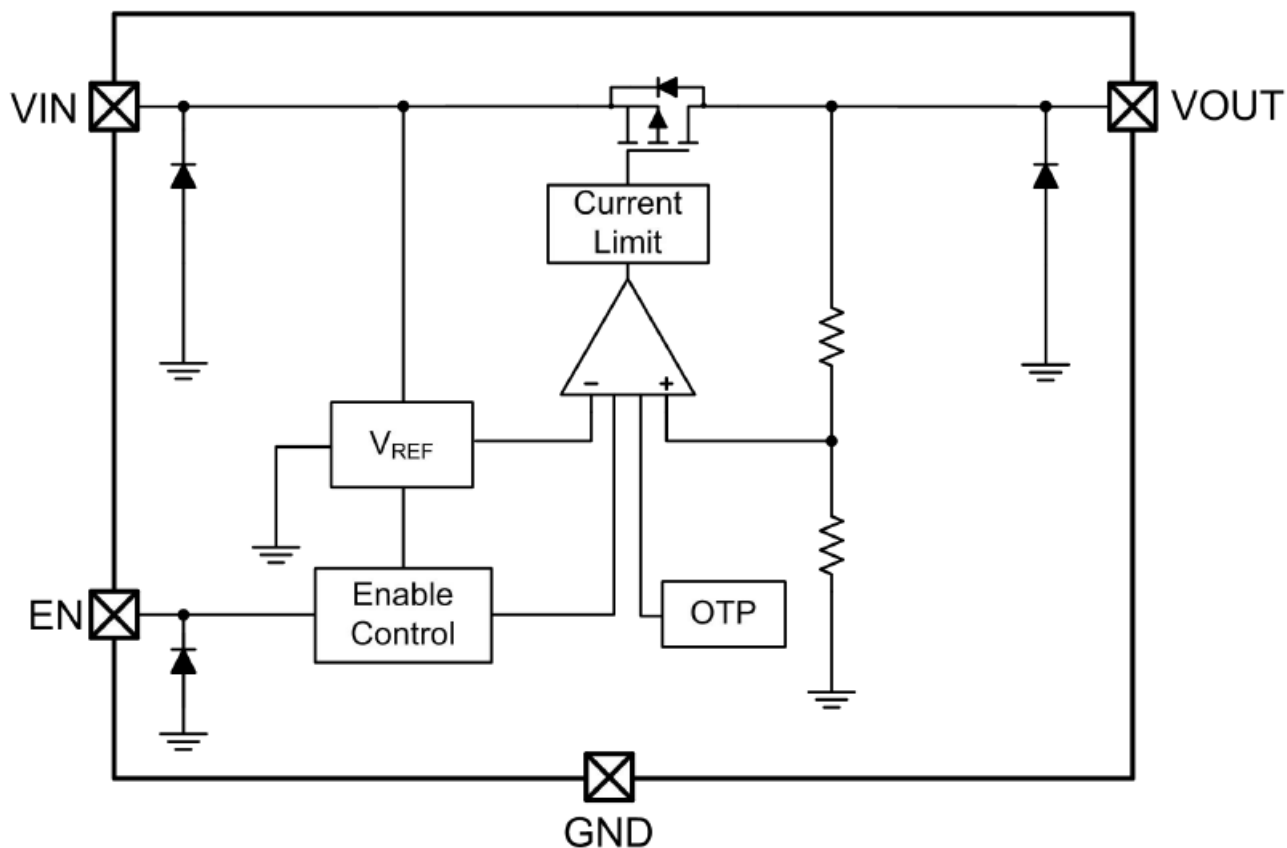

### Absolute Maximum Ratings

Parameter	Symbol	Value	Unit
Input voltage range	$V_{IN}$	-0.3~6.5	V
Output voltage range	$V_{OUT}$	-0.3~ $V_{IN}$	V
Power dissipation *1 *3	$P_D$	0.7	W
Power dissipation *2 *3		0.5	W
Thermal resistance *1	$R_{\theta JA}$	180	°C/W
Thermal resistance *2		250	°C/W
Junction temperature	$T_J$	150	°C
Lead temperature(10s)	$T_L$	260	°C
Storage temperature	$T_{stg}$	-55 ~ 150	°C
ESD Ratings	HBM	±8000	V
	MM	±400	V

**Note:** These are stress ratings only. Stresses exceeding the range specified under “Absolute Maximum Ratings” may cause substantial damage to the device. Functional operation of this device at other conditions beyond those listed in the specification is not implied and prolonged exposure to extreme conditions may affect device reliability.

1. Surface mounted on FR-4 Board using 1 square inch pad size, dual side, 1oz copper
2. Surface mounted on FR-4 board using minimum pad size, 1oz copper
3. Power dissipation is calculate by  $P_D = (V_{IN}-V_{OUT}) \times I_{OUT}$


### Recommend Operating Ratings

Parameter	Symbol	Value	Unit
Operating Supply voltage	$V_{IN}$	2.5~5.5	V
Operating Temperature Range	$T_{opr}$	-40~85	°C


Electronics Characteristics ( $T_a=25^{\circ}\text{C}$ ,  $V_{IN}=V_{OUT}+1\text{V}$ ,  $C_{IN}=C_{OUT}=4.7\mu\text{F}$ , unless otherwise noted)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Output Voltage	$V_{OUT}$	$V_{OUT} < 1.5\text{V}$ , $V_{IN}=2.5\text{V}$ , $I_{OUT}=1\text{mA}$	$V_{OUT}$ - 30mV	$V_{OUT}$	$V_{OUT}$ + 30mV	V
		$V_{OUT} \geq 1.5\text{V}$ , $I_{OUT}=1\text{mA}$	$V_{OUT}$ * 0.98	$V_{OUT}$	$V_{OUT}$ * 1.02	
Dropout Voltage	$V_{DROP}$	$V_{OUT}=V_{OUT}*0.98$ , $I_{OUT}=500\text{mA}$		130	230	mV
Current Limit	$I_{LIM}$	$V_{IN}=5\text{V}$	0.65			A
Line Regulation	$\Delta V_{LINE}$	$V_{OUT}=3.3\text{V}$ , $V_{IN}=4.3\sim 6.0\text{V}$ , $I_{OUT}=1\text{mA}$		5	10	mV
Load Regulation	$\Delta V_{Load}$	$V_{OUT}=3.3\text{V}$ , $I_{OUT}=1\sim 500\text{mA}$		10	30	mV
Quiescent Current	$I_Q$	$V_{OUT}=3.3\text{V}$ , $I_{OUT}=0$		150	200	$\mu\text{A}$
Shut-down Current	$I_{SHDN}$	$V_{EN} = 0\text{V}$		0.1	1.0	$\mu\text{A}$
Power Supply Ripple Rejection	PSRR	$V_{IN}=(V_{OUT}+1\text{V})_{DC}+0.2V_{P-P}$ $F=1\text{KHz}$ , $I_{OUT}=10\text{mA}$		65		dB
		$V_{IN}=(V_{OUT}+1\text{V})_{DC}+0.2V_{P-P}$ $F=10\text{KHz}$ , $I_{OUT}=10\text{mA}$		58		
Output noise voltage	$e_{NO}$	10Hz to 100KHz, $C_{OUT}=4.7\mu\text{F}$		100		$\mu\text{V}_{P-P}$
EN logic high voltage	$V_{ENH}$	$V_{IN}=5.5\text{V}$ , $I_{OUT}=1\text{mA}$	1.2			V
EN logic low voltage	$V_{ENL}$	$V_{IN}=5.5\text{V}$ , $I_{OUT}=0\text{mA}$			0.4	V
Thermal shutdown threshold	$T_{SD}$			165		°C
Thermal shutdown hysteresis	$\Delta T_{SD}$			30		°C


Typical characteristics ( $T_a=25^{\circ}\text{C}$ ,  $V_{IN}=V_{OUT}+1\text{V}$ ,  $C_{IN}=C_{OUT}=4.7\mu\text{F}$ , unless otherwise noted)

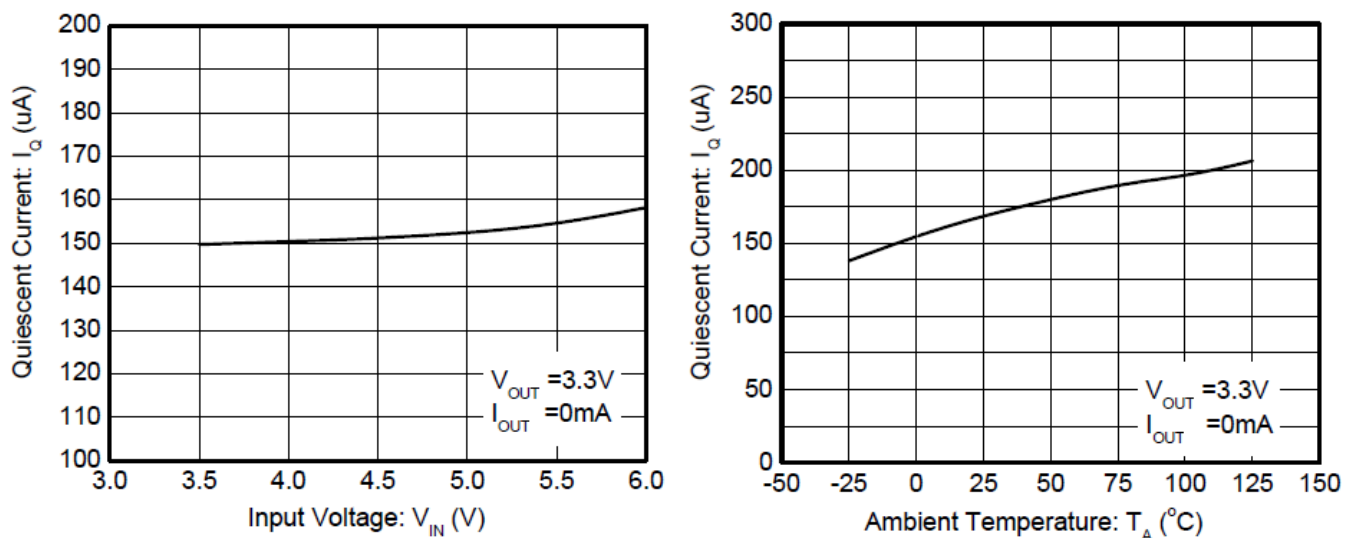


Quiescent current vs. Supply voltage

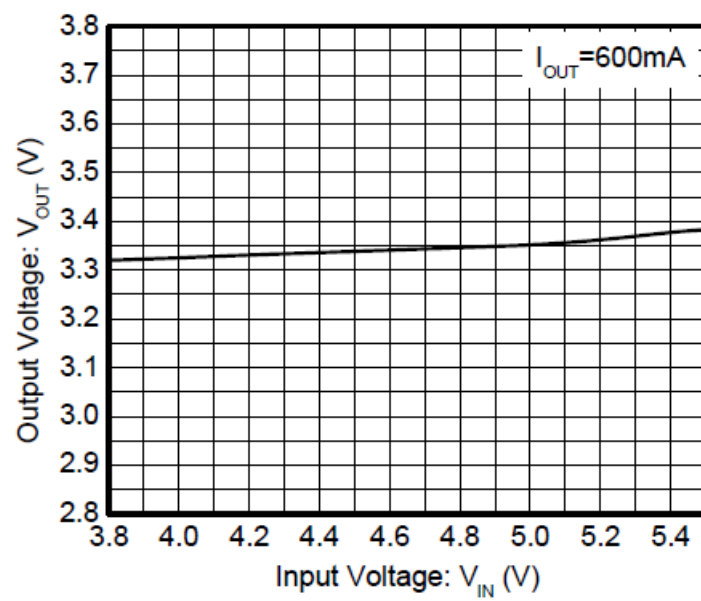




Quiescent current vs. Ambient temperature

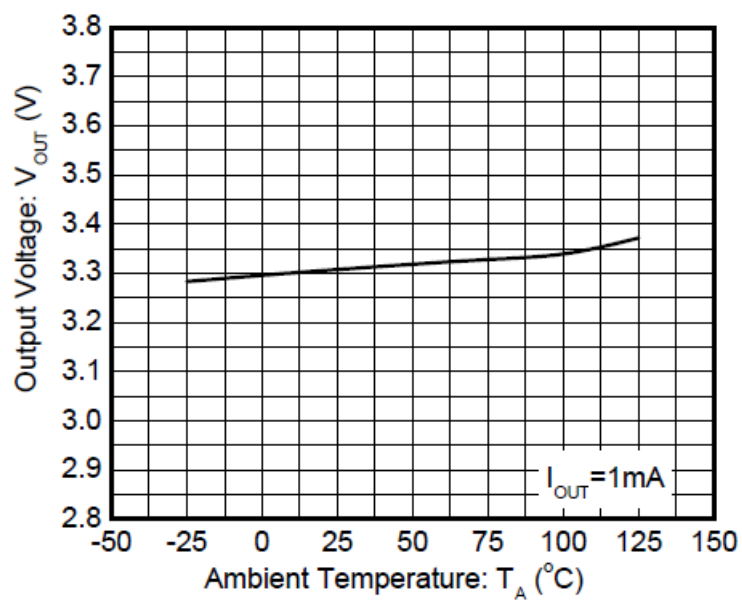


Output voltage vs. Supply voltage

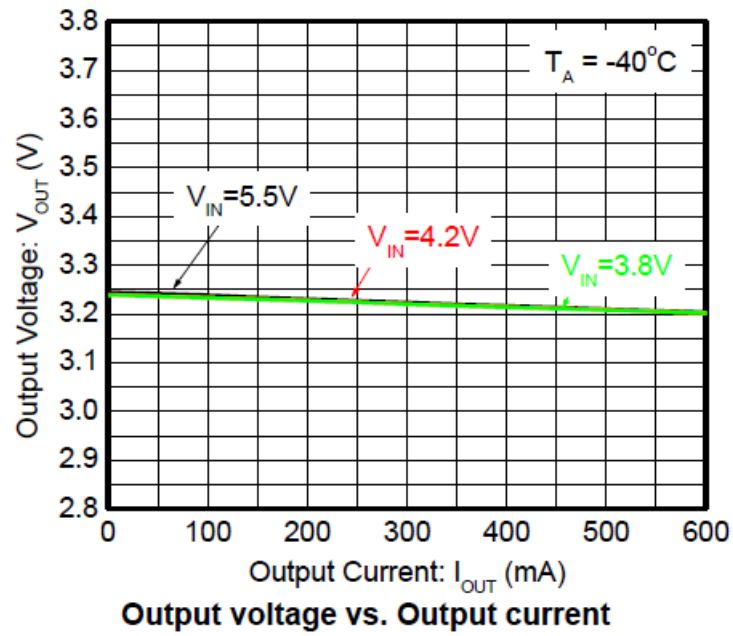


Output voltage vs. Ambient temperature

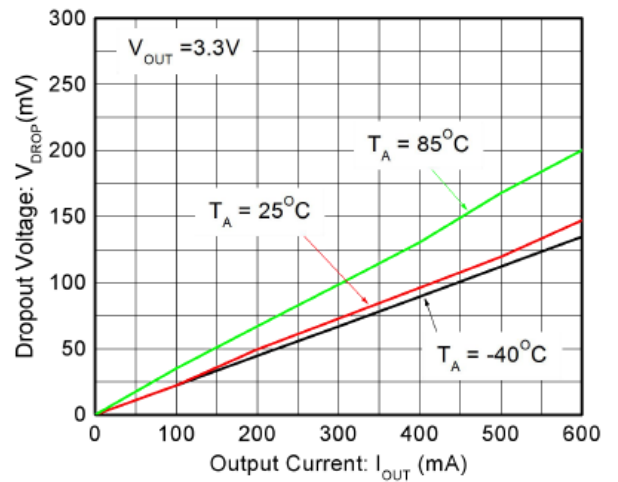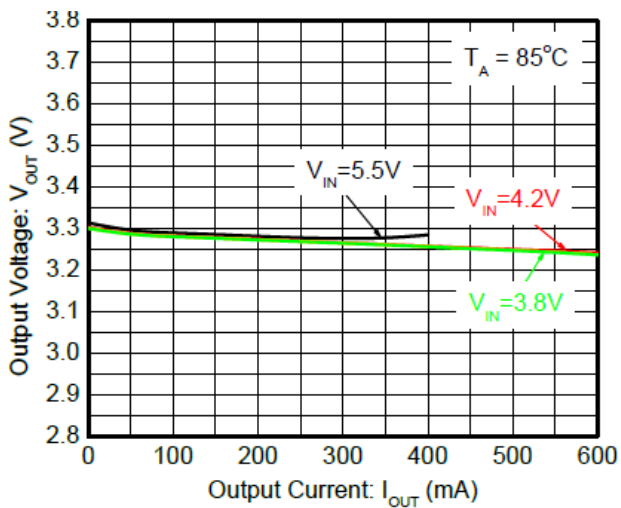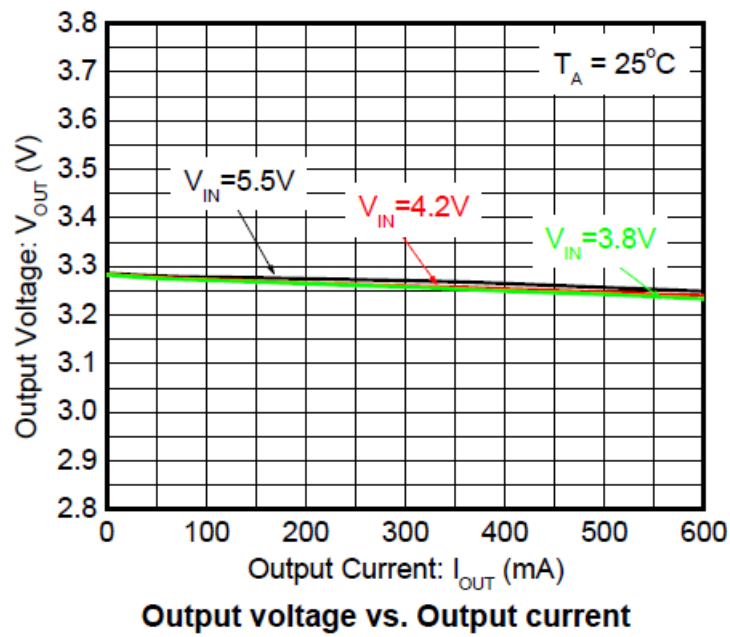


Output voltage vs. Output current

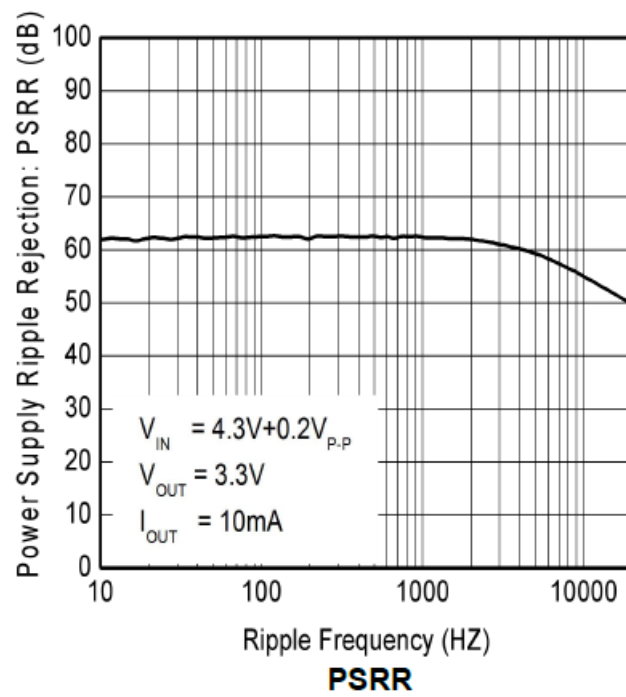


#### Dropout voltage vs. Output current

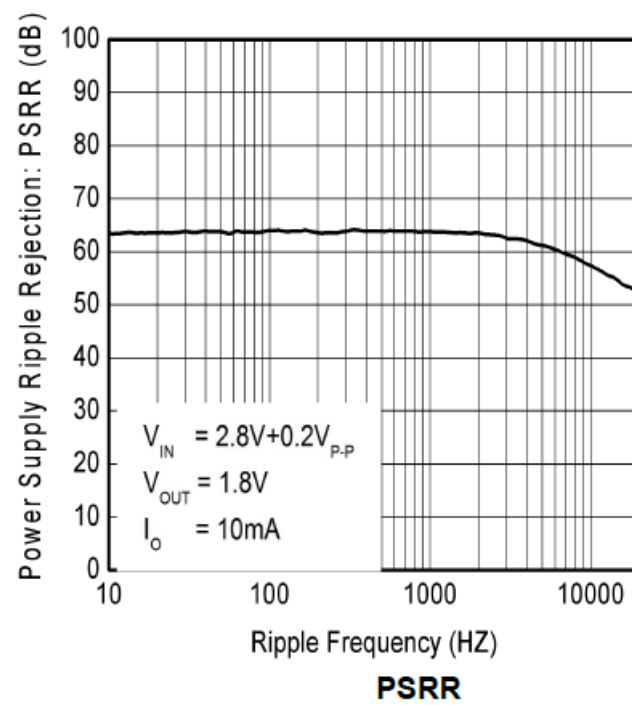


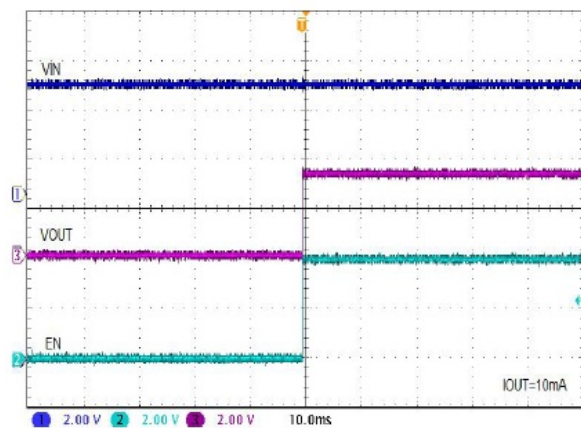


Startup with EN

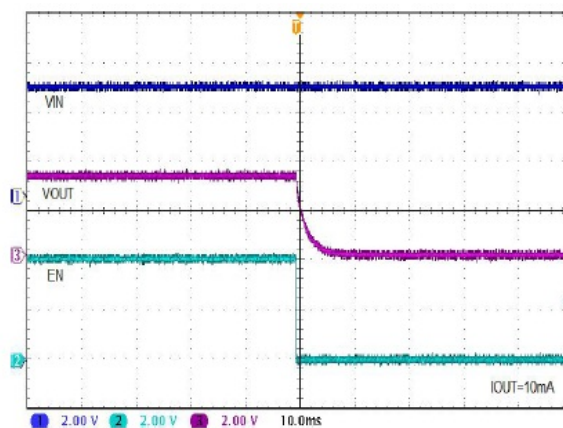

Shutdown with EN

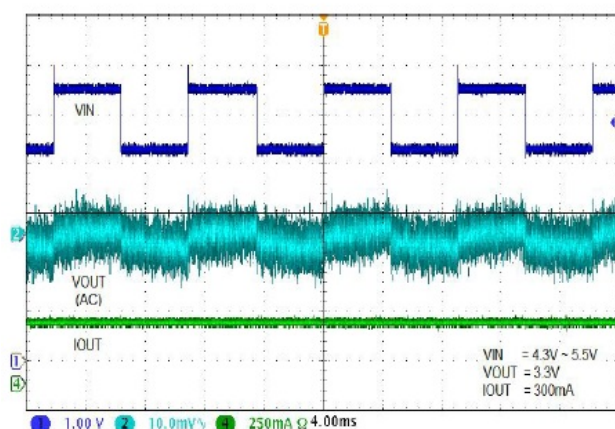


Line Regulation

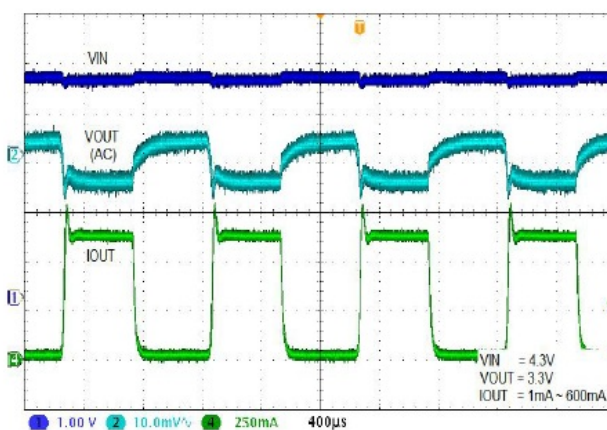


Load Regulation


Package outline dimensions

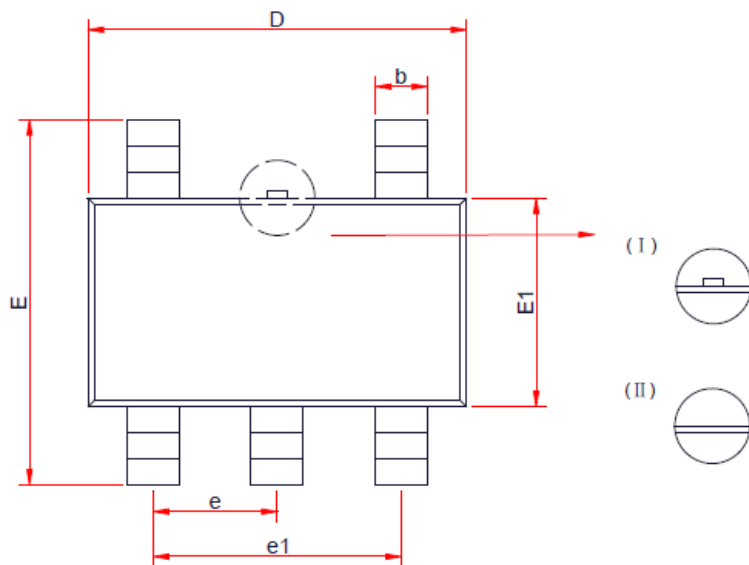

TOP VIEW

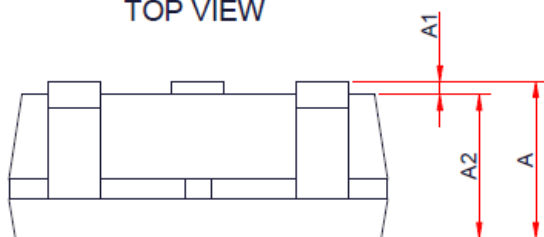

SIDE VIEW

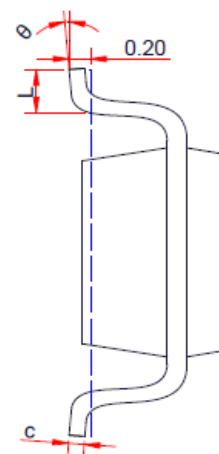


SIDE VIEW


Symbol	Dimensions in Millimeters		
	Min.	Typ.	Max.
A	-	-	1.45
A1	0.00	-	0.15
A2	0.90	1.10	1.30
b	0.30	0.40	0.50
c	0.10	-	0.21
D	2.72	2.92	3.12
E	2.60	2.80	3.00
E1	1.40	1.60	1.80
e	0.95 BSC		
e1	1.90 BSC		
L	0.30	0.45	0.60
θ	0°	-	8°

## TAPE AND REEL INFORMATION


### Reel Dimensions

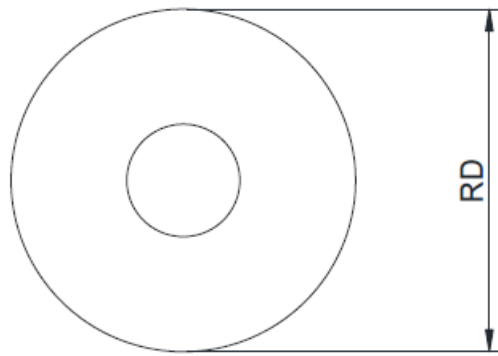

## Tape Dimensions

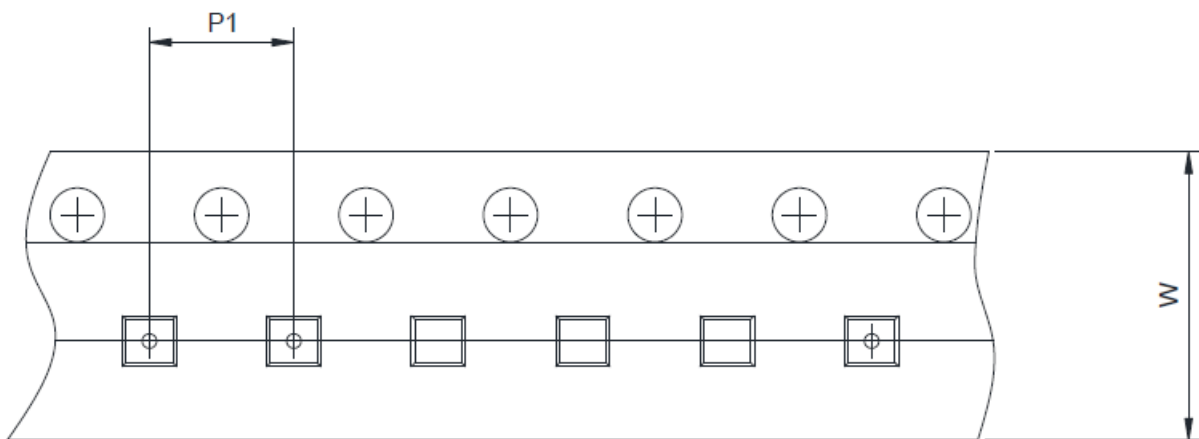

## Quadrant Assignments For PIN1 Orientation In Tape

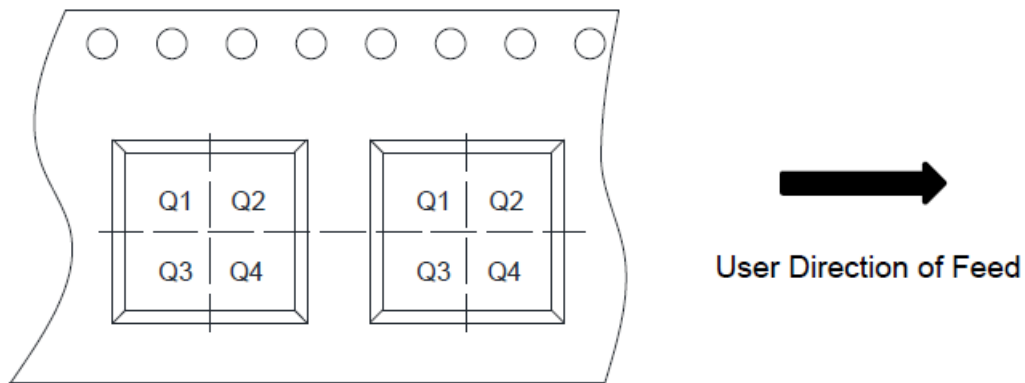

RD	Reel Dimension	<input checked="" type="checkbox"/> 7inch	<input type="checkbox"/> 13inch
W	Overall width of the carrier tape	<input checked="" type="checkbox"/> 8mm	<input type="checkbox"/> 12mm <input type="checkbox"/> 16mm
P1	Pitch between successive cavity centers	<input type="checkbox"/> 2mm	<input checked="" type="checkbox"/> 4mm <input type="checkbox"/> 8mm
Pin1	Pin1 Quadrant	<input type="checkbox"/> Q1	<input type="checkbox"/> Q2 <input checked="" type="checkbox"/> Q3 <input type="checkbox"/> Q4

## ORDER INFORMATION


Ordering No.	V <sub>OUT</sub> (V)	Package	Marking	Operating Temperature	Shipping
WL2803E12-5/TR	1.2	SOT-23-5L	WS12/YYWW	-40 ~ +85°C	3000/Tape and Reel
WL2803E18-5/TR	1.8	SOT-23-5L	WS18/YYWW	-40 ~ +85°C	3000/Tape and Reel
WL2803E25-5/TR	2.5	SOT-23-5L	WS25/YYWW	-40 ~ +85°C	3000/Tape and Reel
WL2803E28-5/TR	2.8	SOT-23-5L	WS28/YYWW	-40 ~ +85°C	3000/Tape and Reel
WL2803E30-5/TR	3.0	SOT-23-5L	WS30/YYWW	-40 ~ +85°C	3000/Tape and Reel
WL2803E33-5/TR	3.3	SOT-23-5L	WS33/YYWW	-40 ~ +85°C	3000/Tape and Reel

4275 Burton Drive Santa Clara, CA 95054 USA

- **Tel:** + 1 408 567 3000
- **Fax:** + 1 408 567 3001
- [www.ovt.com](http://www.ovt.com)

OMNIVISION reserves the right to make changes to their products or to discontinue any product or service without further notice. OMNIVISION and the OMNIVISION logo are trademarks or registered trademarks of OmniVision Technologies, Inc. All other trademarks are the property of their respective owners.

## Documents / Resources

	<p><a href="#">OmniVision WL2803E Ultra Low Dropout</a> [pdf] Instructions WL2803E Ultra Low Dropout, WL2803E, Ultra Low Dropout, Low Dropout, Dropout</p>
---	--