

OmniVision WL2862E Cube Chip Image Sensor ASIC Camera Instruction Manual

[Home](#) » [OMNIVISION](#) » OmniVision WL2862E Cube Chip Image Sensor ASIC Camera Instruction Manual 



WL2862E
High Input Voltage, Low Quiescent Current LDO

Contents

- [1 Descriptions](#)
- [2 Features](#)
- [3 Applications](#)
- [4 Typical Application](#)
- [5 Pin Description](#)
- [6 Block Diagram](#)
- [7 Absolute Maximum Ratings](#)
- [8 Recommend Operating Ratings](#)
- [9 Electronics Characteristics](#)
- [10 Typical characteristics](#)
- [11 PACKAGE OUTLINE](#)
- [DIMENSIONS](#)
- [12 TAPE AND REEL INFORMATION](#)
- [13 Documents / Resources](#)
- [14 Related Posts](#)


Descriptions

The WL2862E series is a high accuracy, high input voltage low quiescent current, high speed, and low dropout Linear regulator with high ripple rejection.

The WL2862E offers over-current limit and over temperature protection to ensure the device working in well conditions.

The WL2862E regulators are available in standard SOT-23-5L packages. Standard products are Pb-free and Halogen-free.


<http://www.ovt.com>

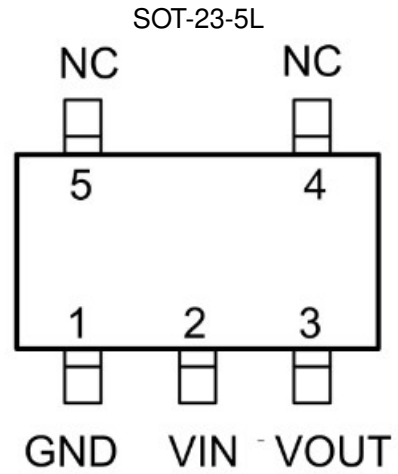

Features

- Supply Voltage : 4.5V~36V
- Output Range : 3V~12V
- Output Accuracy : $< \pm 2\%$
- Output Current : 150mA@(VIN-VOUT=2V)(Typ.)
- PSRR : 65dB @ 0.1KHz
- Dropout Voltage : 1000mV @ IOU=150mA
- Quiescent Current : 4.5 μ A@VIN=12V(Typ.)
- Recommend Capacitor : 10uF

Pin Configuration (Top View)



Marking

2862**	= Device Code
Y	= Year
W	= Week


Order Information

For detail order information, please see page 10.

Applications

- Battery-Powered Equipment
- Communication Equipment
- Audio/Video Equipment
- Smoke Detector

Typical Application

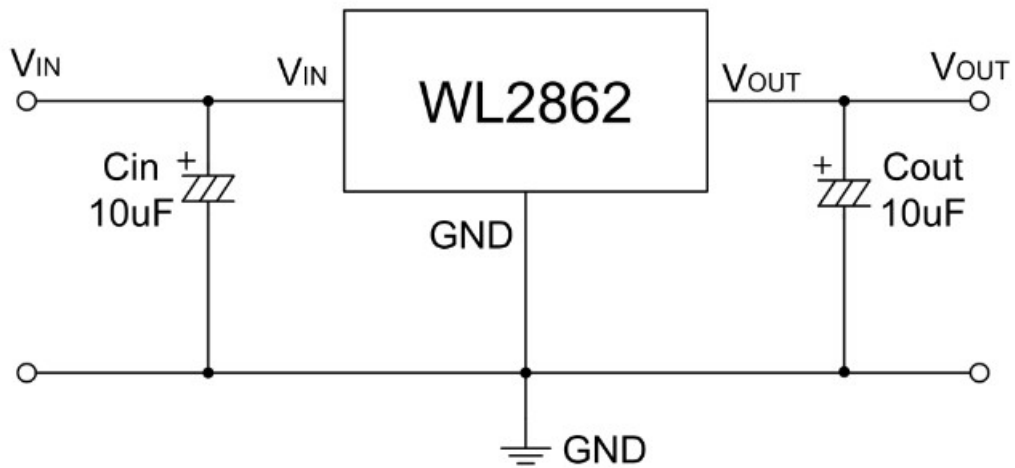


Locate C_{in} and C_{out} as close to the V_{in} pin and V_{out} pin as possible.

Pin Description

PIN	Symbol	Description
1	GND	Ground
2	VIN	Voltage Input
3	VOUT	Voltage Output
4	NC	Not Connect
5	NC	Not Connect

Block Diagram

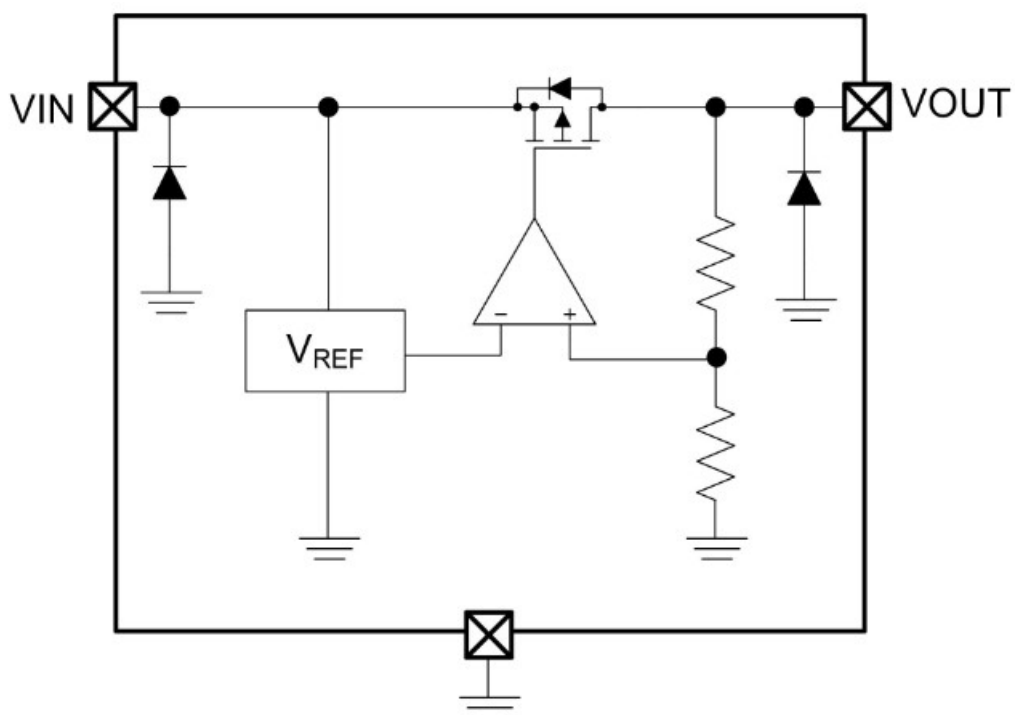

Absolute Maximum Ratings

Parameter	Value	Unit
Power Dissipation	500	mW
VIN Range	-0.3 44	V
VOUT Range	-0.3 15	V
Lead Temperature Range	260	°C
Storage Temperature Range	-55 ~ 150	°C
Operating Junction Temperature Range	150	°C
ESD MM	600	V
ESD HBM	8K	V

Recommend Operating Ratings

Parameter	Value	Unit
Operating Supply voltage	4.5 36	V
Operating Temperature Range	-40 85	°C
Thermal Resistance (On PCB) , RθJA	250	°C/W







Electronics Characteristics







(Ta=25°C, VIN=12V,VOUT=5.0V, CIN=COUT=10uF, unless otherwise noted)







Symbol	Parameter	Test Condition	WL2862E SPEC			Unit
			Min.	Typ.	Max.	
VIN	Input Range	I _{OUT} =I _{OM} A	4.5		36	V
VO _{UT}	Output Range	I _{OUT} =10mA	V _{OUT} *0.98	V _{OUT}	V _{OUT} *1.02	V
ΔV _{OUT}	Output Voltage	VIN=12V, I _{OUT} =I _{OM} A	2.940	3.0	3.060	
			3.234	3.3	3.366	V
			4.9	5.0	5.1	V
		VIN=18V, I _{OUT} =10mA	9.8	10.0	10.2	V
I _{OUT_PK}	Maximum Output Current	VIN= V _{OUT} .2V, R _L =10	150			mA
I _{Q1}	Quiescent Current For V _{OUT} =5V	VIN=12V, No load		4.5		μA
I _{Q2}	Quiescent Current For V _{OUT} =10V	VIN=18V, No load		5.5		μA
V _{DROP}	Dropout Voltage	I _{OUT} =1mA		6.5		mV
		I _{OUT} =150mA		1000		
ΔV _{Line}	Line Regulation	VIN=7-24V, V _{OUT} =5V I _{OUT} =I _{OM} A		0.02		%V
		VIN=7-36V, V _{OUT} =5V I _{OUT} =1mA		0.1		
ΔV _{Load}	Load Regulation	VIN=12V, [I _{OUT} = 1-100mA		0.6		%
e _{NO}	Output Noise	I _{OUT} =10mA		300		μV
PSRR	Ripple Rejection	VIN=10.0V V _{pp} =0.5V I _{OUT} =1mA	f=100Hz	65		dB
			f=1KHz	55		
			f=10KHz	40		
T _{SO}	Thermal Protection	VIN =12V, I _{OUT} =1mA		150		°C
ΔV _O /ΔT	Temperature Coefficient	VIN=12V, I _{OUT} =1mA		100		ppm





Typical characteristics

(T_a=25°C, C_{IN}=C_{OUT}=10μF, unless otherwise noted)

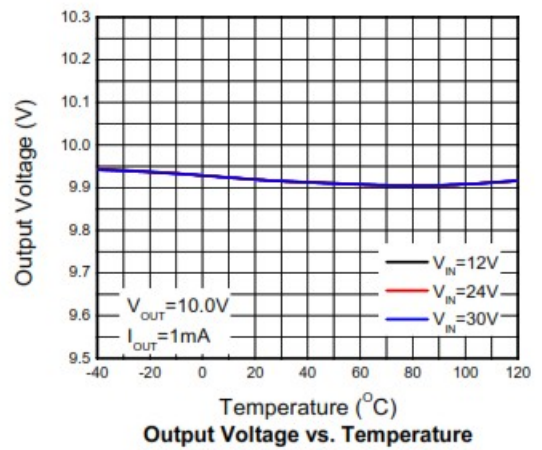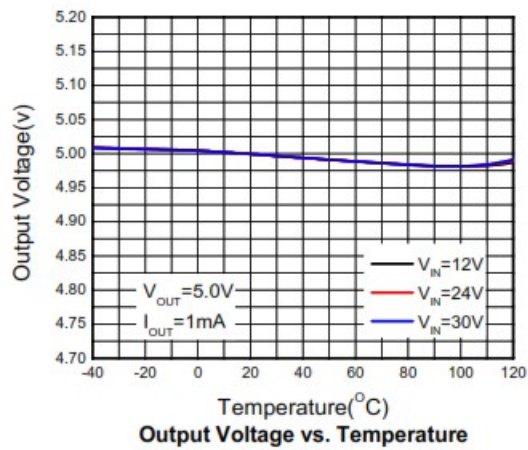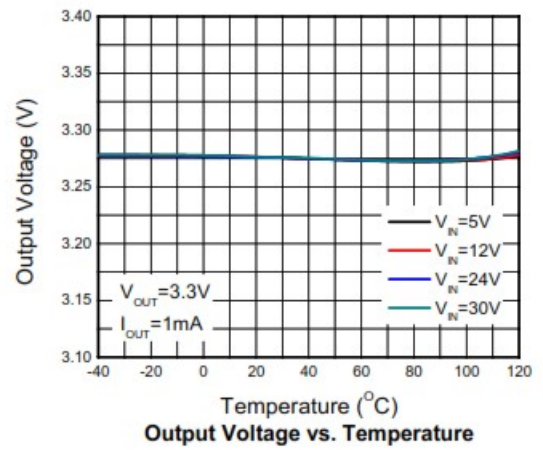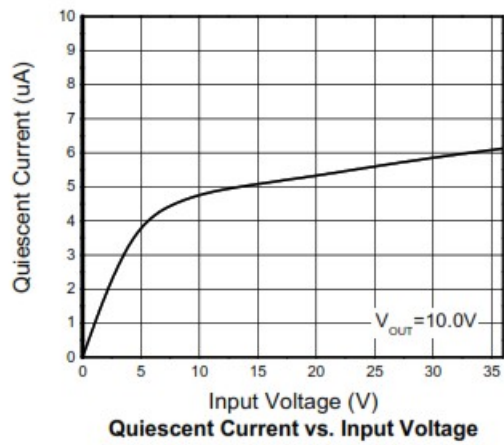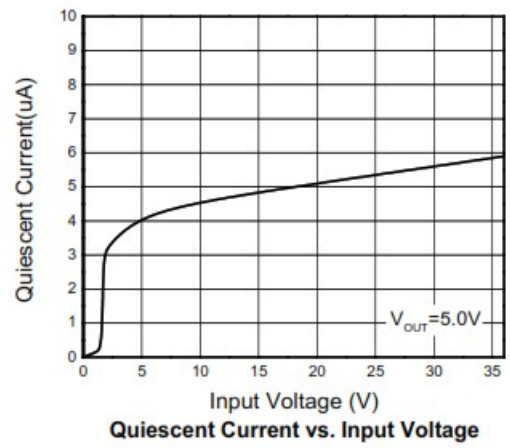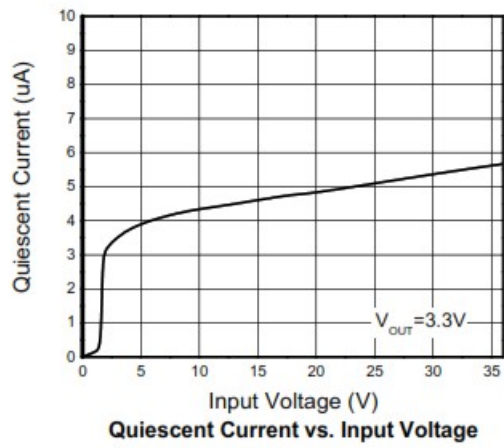


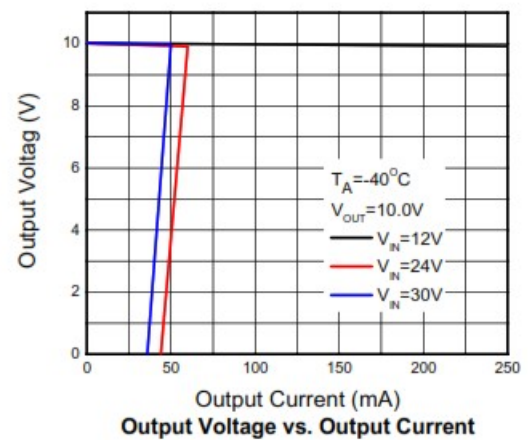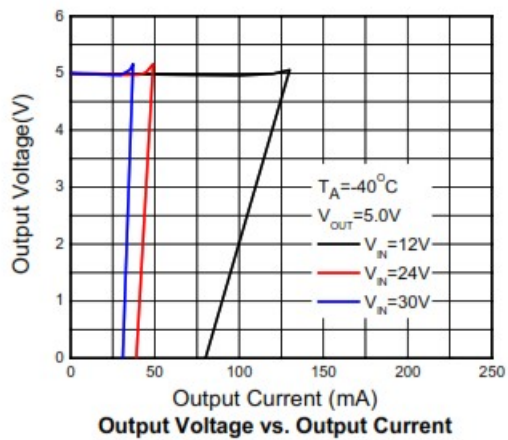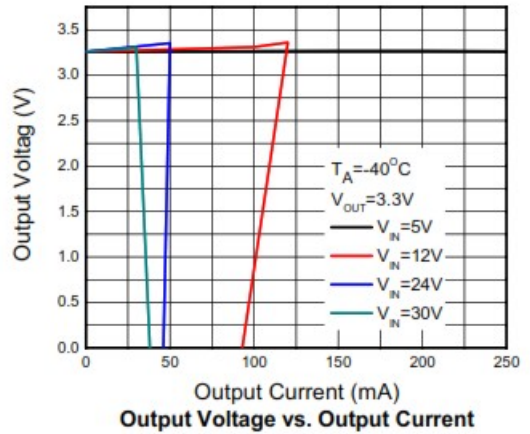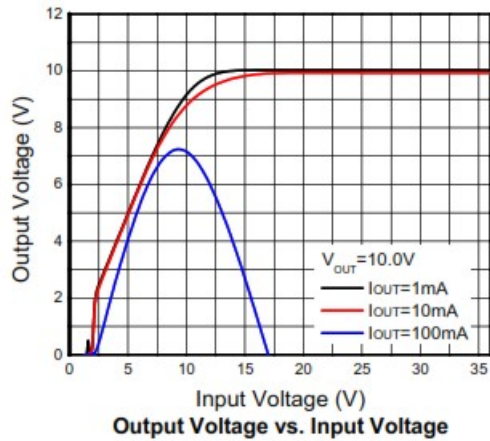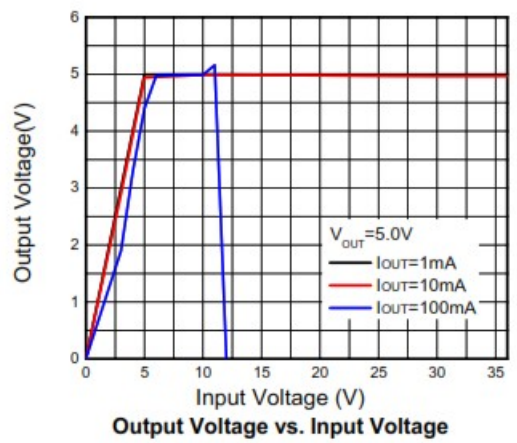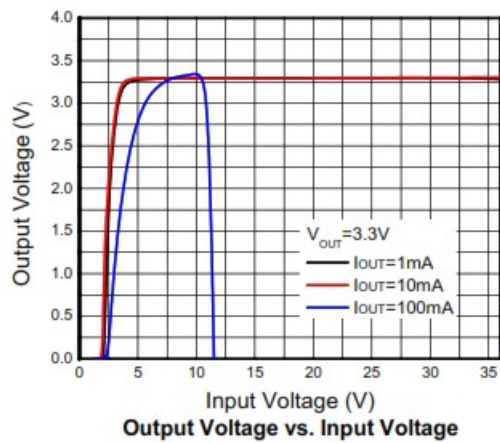

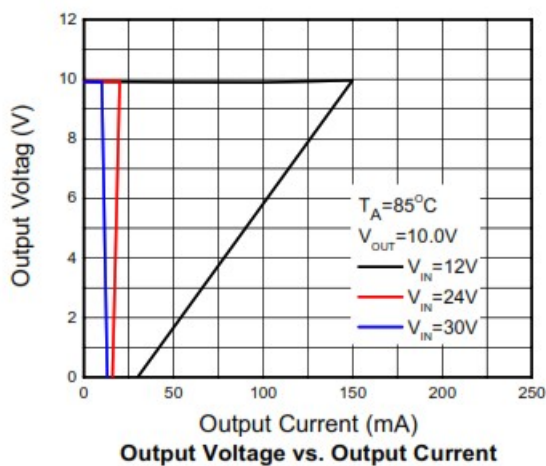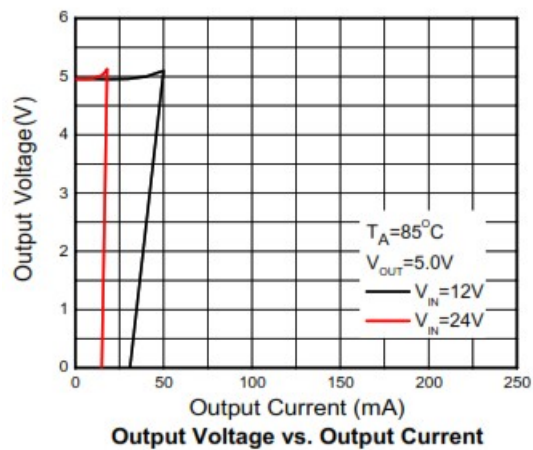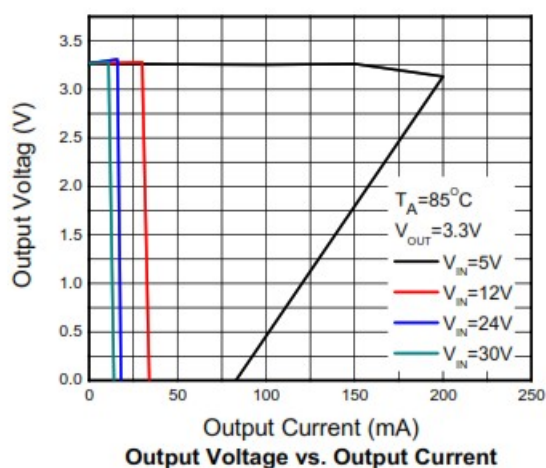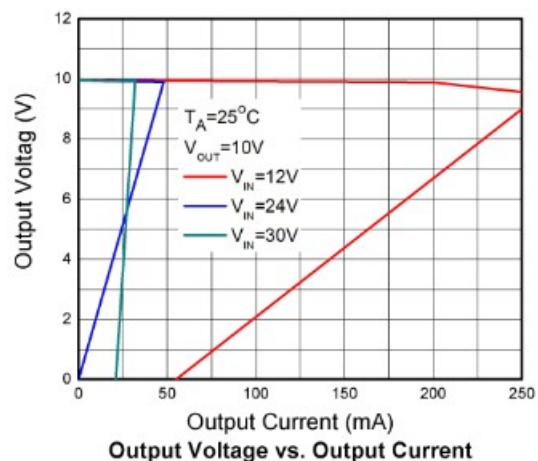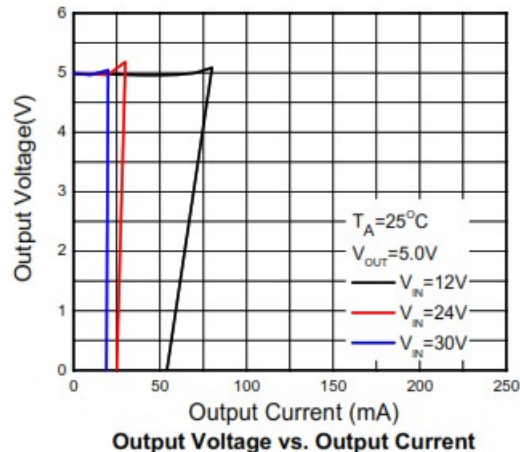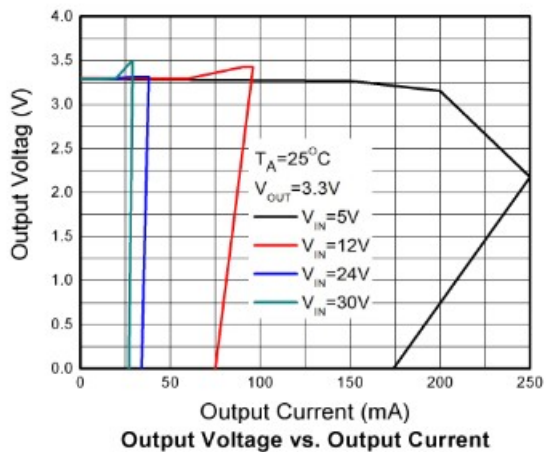


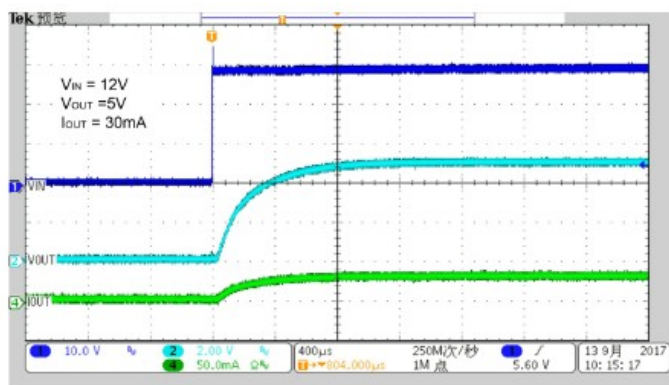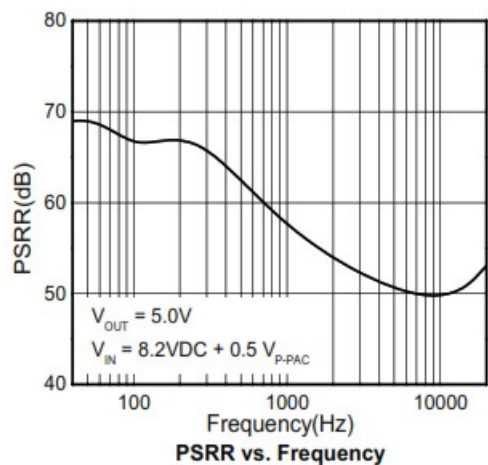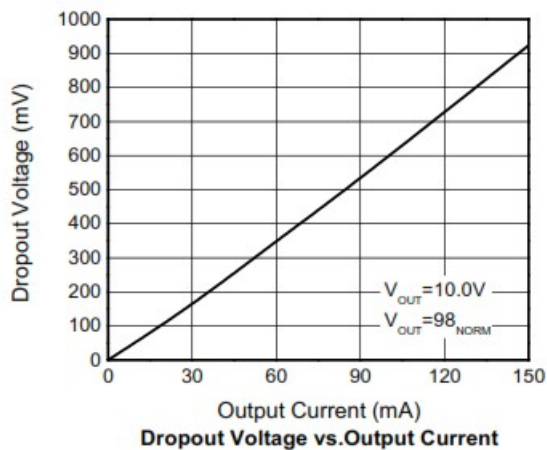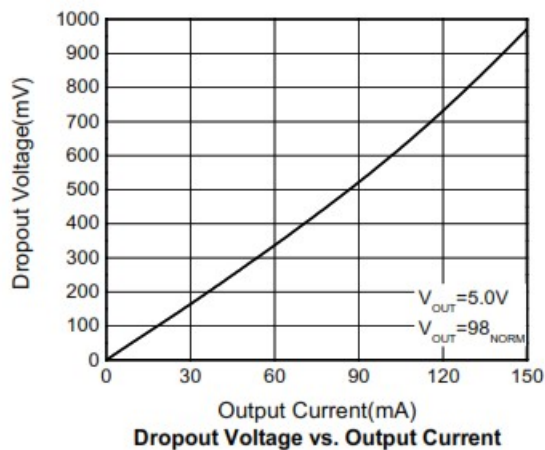


Start up from Power ON

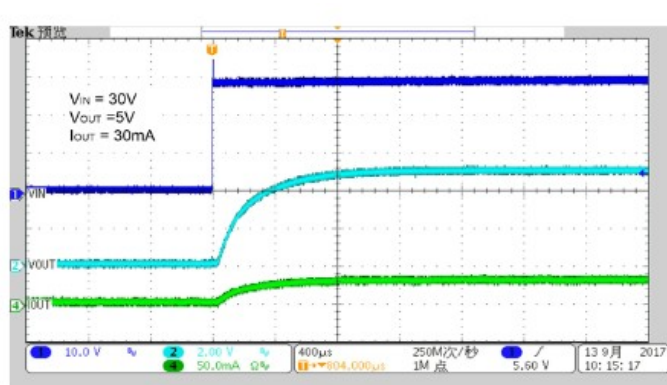


Start up from Power ON

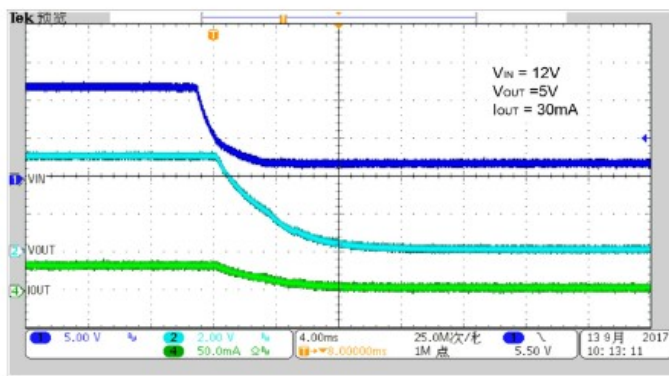


Shutdown from Power OFF

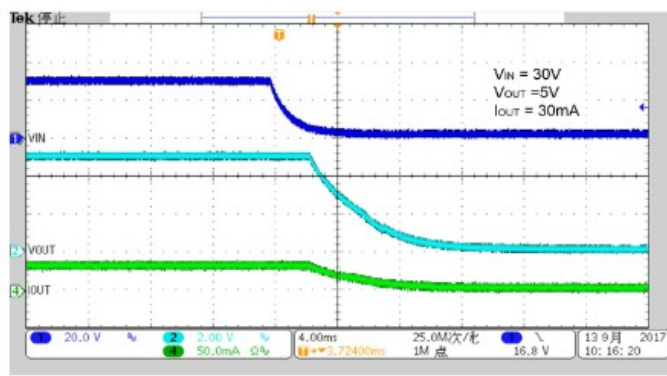

Shutdown from Power OFF

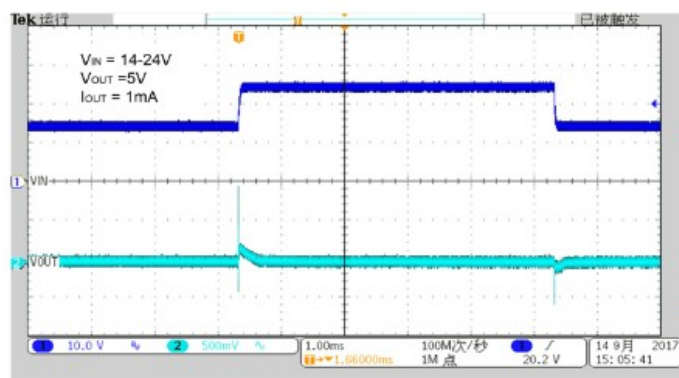

Line Transient Response

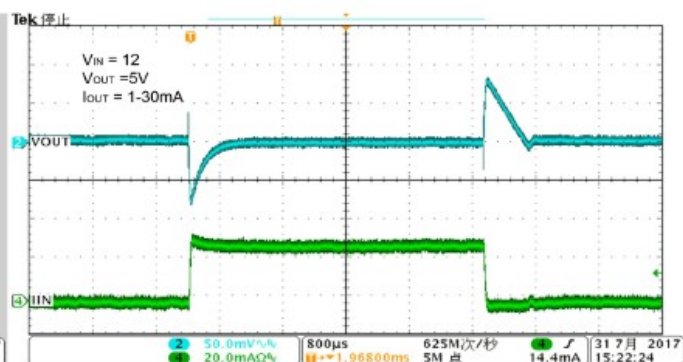


Line Transient Response

ORDER INFORMATION

Ordering No.	Vout (V)	Package	Operating Temperature	Marking	Shipping
WL2862E30-5/TR	3.0	SOT-23-5L	-40—+85°C	2862 EMYW	Tape and Reel, 3000
WL2862E33-5/TR	3.	SOT-23-5L	-40—+85°C	2862 ENYW	Tape and Reel, 3000
WL2862E50-5/TR	5.0	SOT-23-5L	-40—+85°C	2862 ETYW	Tape and Reel, 3000
WL2862EA0-5/TR	10.0	SOT-23-5L	-40—+85°C	2862 EZYW	Tape and Reel, 3000

PACKAGE OUTLINE DIMENSIONS


SOT-23-5L

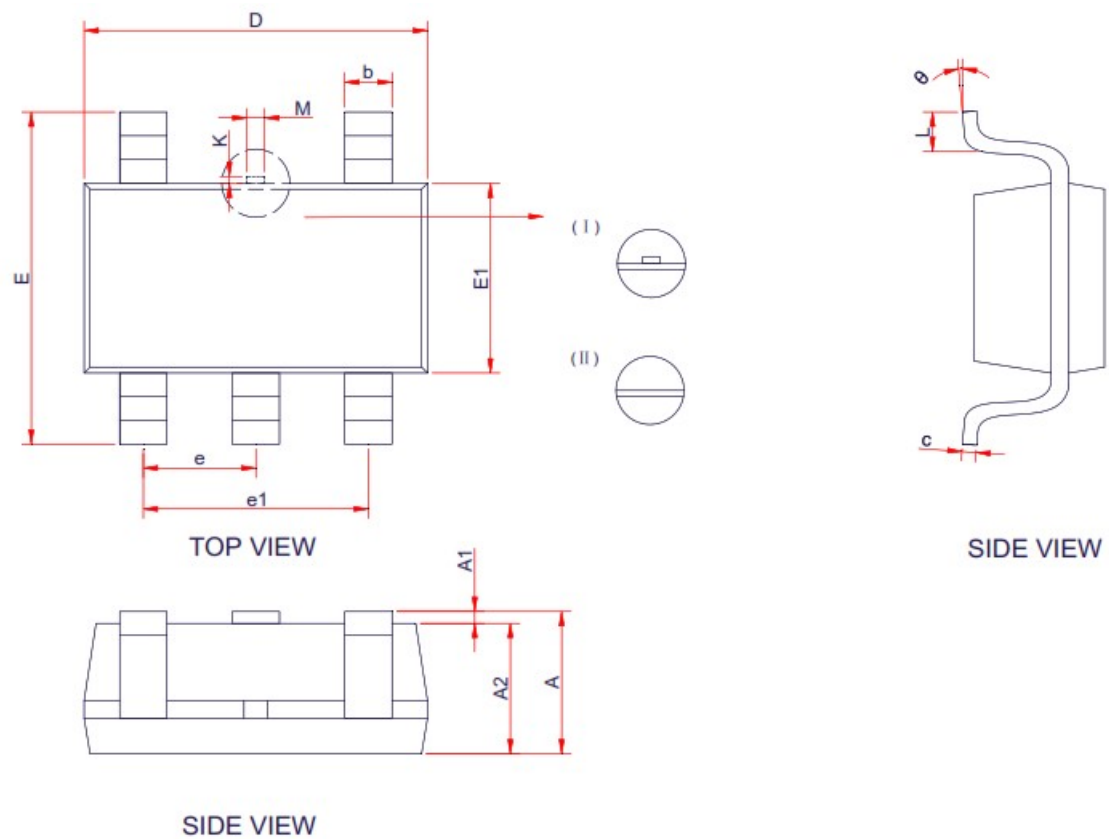


Symbol	Dimensions in Millimeters		
	Min.	Typ.	Max.
A	—	—	1.45
A1	0.00	—	0.15
A2	0.90	1.10	1.30
b	0.30	0.40	0.50
c	0.10	—	0.21
D	2.72	2.92	3.12
E	2.60	2.80	3.00
E1	1.40	1.60	1.80
e	0.95 BSC		
e1	1.90 BSC		
L	0.30	0.45	0.60
M	0.10	0.15	0.25
K	0.00	—	0.25
0	0°	—	8°

TAPE AND REEL INFORMATION


Reel Dimensions

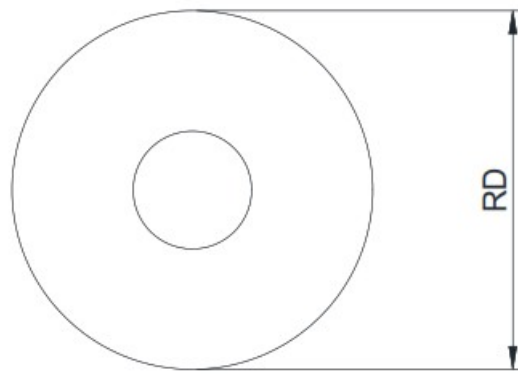

Tape Dimensions

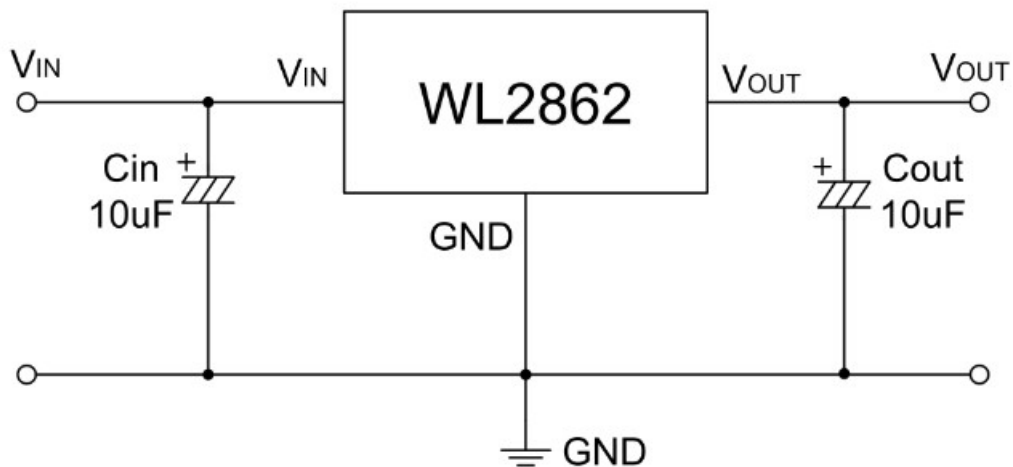

Quadrant Assignments For PIN1 Orientation In Tape

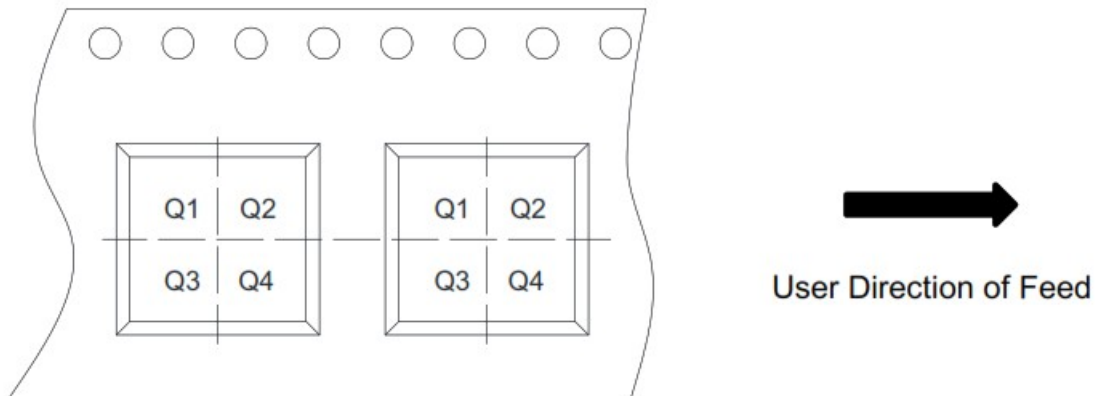


RD	Reel Dimension	☒ 7inch ☐ 13inch
W	Overall width of the carrier tape	☒ 8mm ☐ 12mm ☐ 16mm
P1	Pitch between successive cavity centers	☐ 2mm ☒ 4mm ☐ 8mm
Pin1	Pin1 Quadrant	☐ Q1 ☐ Q2 ☒ Q3 ☐ Q4

OMNIVISION reserves the right to make changes to their products or to discontinue any product or service without further notice. OMNIVISION and the OMNIVISION logo are trademarks or registered trademarks of OmniVision Technologies, Inc. All other trademarks are the property of their respective owners.



Documents / Resources

	OmniVision WL2862E Cube Chip Image Sensor ASIC Camera [pdf] Instruction Manual WL2862E Cube Chip Image Sensor ASIC Camera, WL2862E, Cube Chip Image Sensor ASIC Camera, Chip Image Sensor ASIC Camera, Sensor ASIC Camera, ASIC Camera, Camera
---	---