



onninen BUBO2B1G Easy LED Floodlight Bubo Instructions

[Home](#) » [onninen](#) » onninen BUBO2B1G Easy LED Floodlight Bubo Instructions 

Contents

- [1 onninen BUBO2B1G Easy LED Floodlight Bubo](#)
- [2 Instructions](#)
- [3 Specifications](#)
- [4 Documents / Resources](#)
 - [4.1 References](#)
- [5 Related Posts](#)

onninen


onninen BUBO2B1G Easy LED Floodlight Bubo






Instructions




B1G

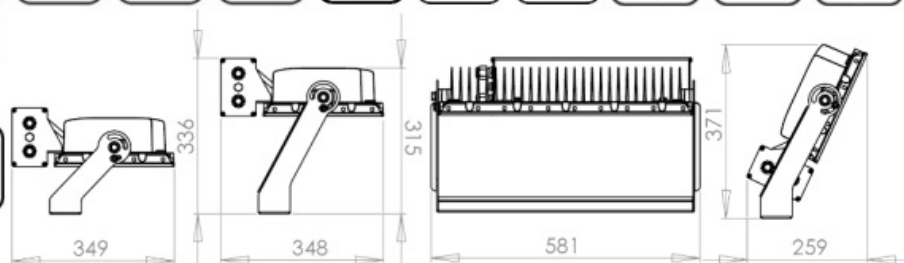

B1

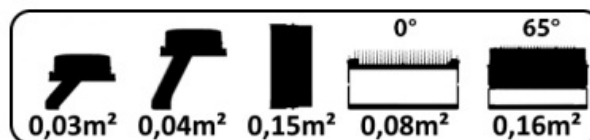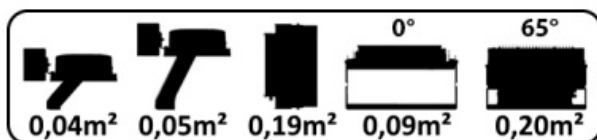

Specifications

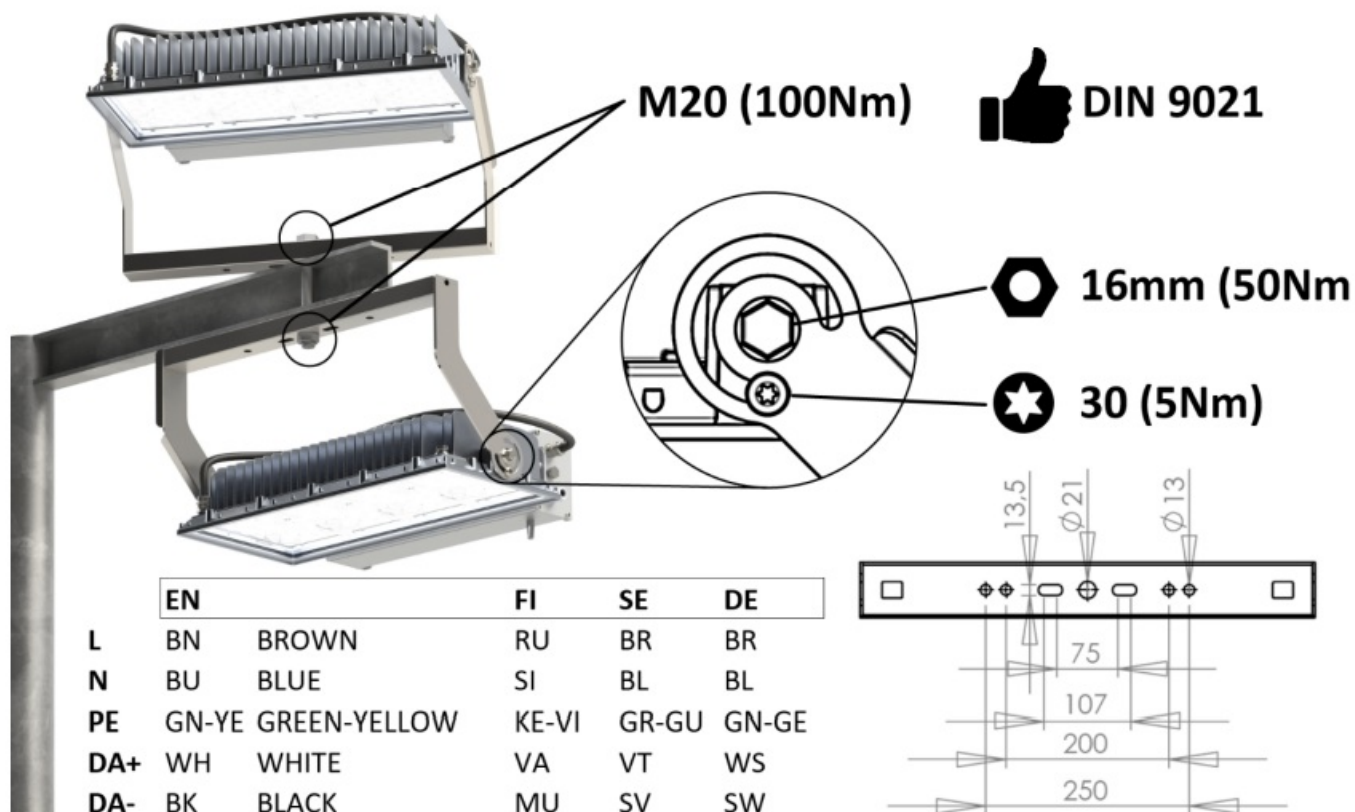

	EN	FI	SE	DE
L	BN BROWN	RU BR	BR	BR
N	BU BLUE	SI BL	BL	BL
PE	GN-YE GREEN-YELLOW	KE-VI	GR-GU	GN-GE
DA+	WH WHITE	VA VT	WS	
DA-	BK BLACK	MU SV	SW	

230 VAC 50/60 Hz

230 VAC 50/60 Hz				Type	Number of luminaires per circuit breaker BG/BGS (BGE)					
					B10 A	B16 A	C10 A	C16 A	Gg10 A	Gg16 A
Bubo B1	120-	1400	2,3 A	1a	2	4	4	6	3	5
		1200	1,9 A		3	5	4	7	3	5
		1050	1,7 A		4	6	6	9	4	7
	96-	1200	1,3 A	1b	4	6	6	11	5	8
		1050	1,4 A		4	6	6	11	5	8
		850	1,1 A		4	6	6	11	5	8

Type	Gear	Inrush current peak	Earth leakage current
Type 1a	BGS	< 4A (pulses greater than 1ms) 15A, t=170μs (10% of Ipeak)	0,6 mA
Type 1b	BGS	13A, t=1320μs (50% of Ipeak)	0,2 mA

Control circuit must be provided with cable which is insulated according to the mains voltage.

tel. +358 2 737 4420

easyled.fi

Meriniitynkatu 11 VAT number

FI-24100 Salo, Finland FI20776746

Documents / Resources

	onninen BUBO2B1G Easy LED Floodlight Bubo [pdf] Instructions BUBO2B1G, Easy LED Floodlight Bubo, LED Floodlight Bubo, Floodlight Bubo, BUBO2B1G, Easy LED Floodlight
--	--

References

-  [Easy LED - LED-valaistuksen pioneeri vuodesta 2006](#)

Manuals+.