




## opentext T7U Tableau Forensic PCIe Bridge User Guide

[Home](#) » [opentext](#) » opentext T7U Tableau Forensic PCIe Bridge User Guide 


### opentext T7U Tableau Forensic PCIe Bridge User Guide

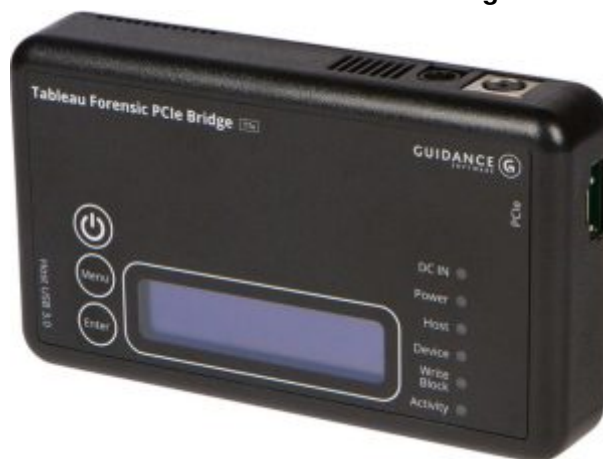

#### Contents

- [1 GETTING STARTED](#)
- [2 LCD MENU OPTIONS](#)
- [3 CONNECTION RECOMMENDATIONS](#)
- [4 DIP SWITCH SETTINGS](#)
- [5 FIRMWARE UPDATES](#)
- [6 SUPPORT](#)
- [7 ABOUT OPENTEXT](#)
- [8 CONNECT WITH US](#)
- [9 Documents / Resources](#)
- [10 Related Posts](#)

## GETTING STARTED

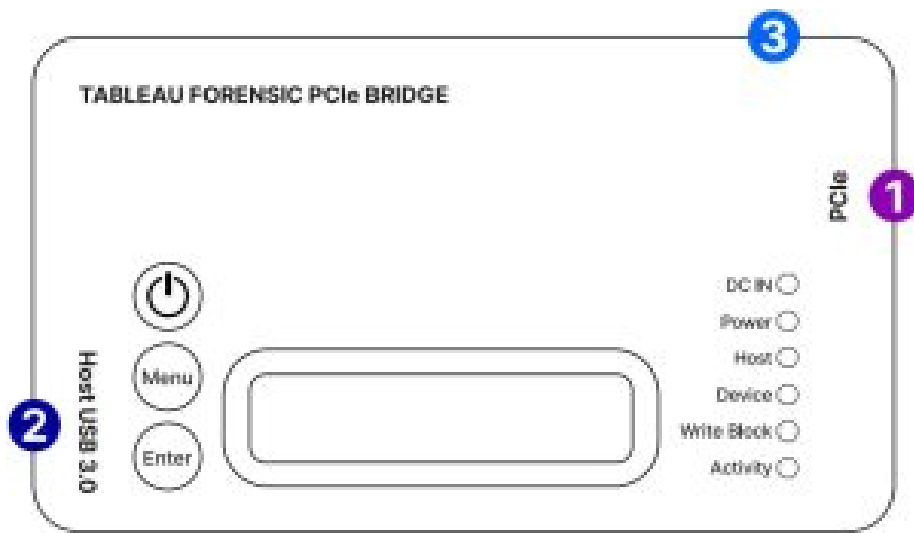

### Confirm that the bridge is off before beginning

1. Using a Tableau PCIe Adapter, connect one source drive to the bridge PCIe port 1
  2. Connect the bridge to the host computer using the host USB port 2
  3. Connect the power supply to the bridge's DC In 3
  4. Press the power button and begin operation
- Before you remove the connected PCIe drive or power down the T7u, safely eject or unmount the drive on your host computer.

### LCD MENU OPTIONS

<b>Device Info</b>	Displays the connected PCIe drive mfg, model, serial number and firmware version
<b>Select LUN</b>	If the drive has multiple LUNs, select a LUN to mount
<b>Bridge Info</b>	Displays T7u firmware version, serial number and DIP switch configuration
<b>Show Status</b>	Displays information related to current status

### Use the Menu and Enter buttons to navigate through these LCD menus


<b>Menu</b>		Advance to next main menu screen
<b>Enter</b>		Advance to the first/next informational screen

CONNECTION RECOMMENDATIONS


For PCIe Drives	Connect a Tableau PCIe Adapter
	<ul style="list-style-type: none"><li>• for PCIe card SSD, use TDA7-1</li><li>• for PCIe M.2 SSD, use TDA7-2</li><li>• for Apple mid-2013 – 2016 PCIe SSD, use TDA7-3</li><li>• for PCIe U.2 SSD, use TDA7-4</li><li>• for Apple 2016+ PCIe SSD, use TDA7-7 to T7u using a Tableau PCIe Cable</li><li>• TC-PCIe-(4, 8, 20)</li></ul>
For the Host Connection	Use a Tableau USB 3.0 cable (TC-USB3)
For Power (DC In)	Use a Tableau power supply (TP5 or TP2)

DIP SWITCH SETTINGS

**1** Locate breakaway plastic & remove

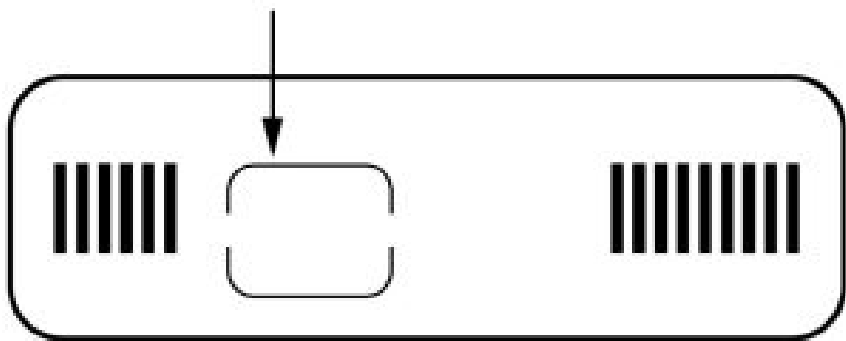

**2** Adjust DIP switches for intended use

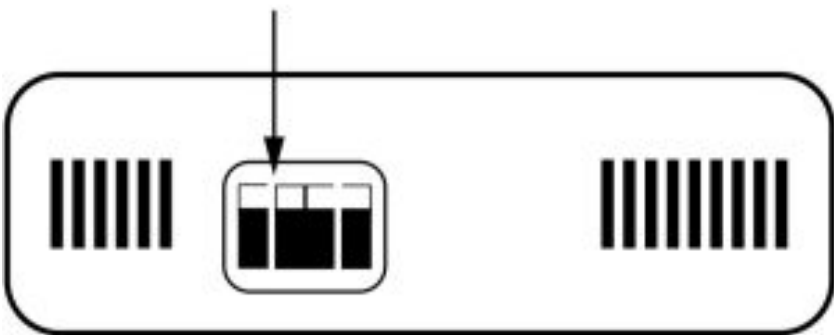

<b>SWITCH 1</b>	ON = Read/Write OFF = Read-Only
<b>SWITCH 2</b>	ON = Hide Write Protect OFF = Report Write Protect
<b>SWITCH 3</b>	ON = Hide Write Errors OFF = Report Write Errors
<b>SWITCH 4</b>	No Function

\* Default setting is OFF for all switches

## FIRMWARE UPDATES

Free firmware updates are provided for Tableau Forensic products on a regular basis through the Tableau Firmware Update (TFU) utility. Reference the Tableau Download Center webpage for more information: [security.opentext.com/tableau/download-center](https://security.opentext.com/tableau/download-center)

## SUPPORT

For Tableau Forensic product support: [opentext.com/support/contact/guidance](https://opentext.com/support/contact/guidance)

## ABOUT OPENTEXT

OpenText, The Information Company, enables organizations to gain insight through market leading information management solutions, on-premises or in the cloud. For more information about OpenText (NASDAQ: OTEX, TSX: OTEX) visit: [opentext.com](https://opentext.com).


## CONNECT WITH US

Opentext CEO Mark Barrenchea's blog  
Twitter LinkedIn

[opentext.com/contact](https://opentext.com/contact)

Copyright © 2021 Open Text. All Rights Reserved. Trademarks owned by Open Text.  
For more information, visit: <https://www.opentext.com/about/copyrightinformation>  
09.21 | 18895.EN

## Documents / Resources

	<a href="#">opentext T7U Tableau Forensic PCIe Bridge</a> [pdf] User Guide T7U, Tableau Forensic PCIe Bridge
---	---