



opentext T8U Tableau Forensic USB Bridge User Guide

[Home](#) » [opentext](#) » [opentext T8U Tableau Forensic USB Bridge User Guide](#) 


opentext™

QUICK REFERENCE GUIDE Tableau Forensic T8u USB Bridge

Contents

- [1 GETTING STARTED](#)
- [2 LCD MENU OPTIONS](#)
- [3 CONNECTION RECOMMENDATIONS](#)
- [4 DIP SWITCH SETTINGS](#)
- [5 FIRMWARE UPDATES](#)
- [6 SUPPORT](#)
- [7 ABOUT OPENTEXT](#)
- [8 CONNECT WITH US:](#)
- [9 Documents / Resources](#)
- [10 Related Posts](#)

GETTING STARTED

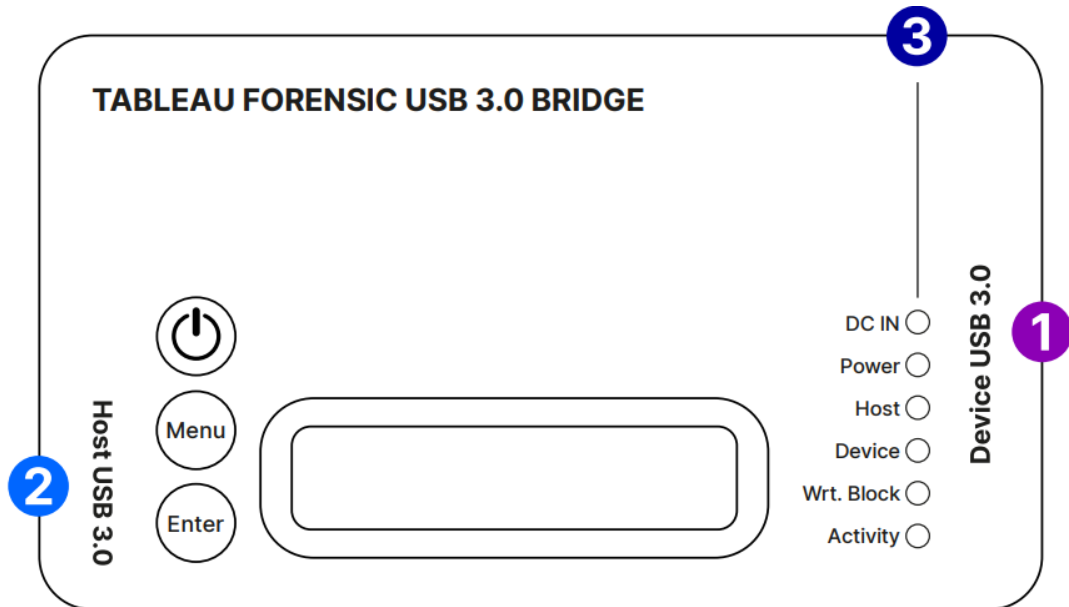



Confirm that the bridge is off before the beginning.

1. Connect one USB source device* to the right side of the T8u 1
 - * T8u supports USB devices that conform to the USB Mass Storage Bulk-Only specification.
2. Connect the bridge to the host computer using the host USB port 2
3. Connect the power supply to the bridge's DC In 3
4. Press the power button (⏻) and to begin operation Before you remove the connected USB device or power down the T8u, safely eject or unmount the device on your host computer.

LCD MENU OPTIONS

Device Info	Displays the connected USB device mfg, model, serial number and firmware version
Select LUN	If the drive has multiple LUNs, select a LUN to mount
Bridge Info	Displays T8u firmware version, serial number, and DIP switch configuration
Show Status	Displays information related to the current status

Use the Menu and Enter buttons to navigate through these LCD menus:


Menu		Advance to next main menu screen
Enter		Advance to the first/next informational screen

CONNECTION RECOMMENDATIONS


For USB Device	Use the cable supplied with the USB device or directly connect
For the Host Connection	Use a Tableau USB 3.0 cable (TC-USB3)
For Power (DC-In)	Use a Tableau power supply (TP5 or TP2)

DIP SWITCH SETTINGS

1 Locate breakaway plastic & remove

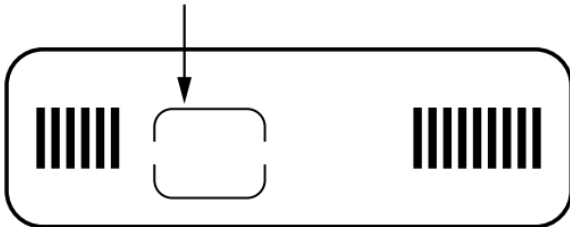

2 Adjust DIP switches for intended use

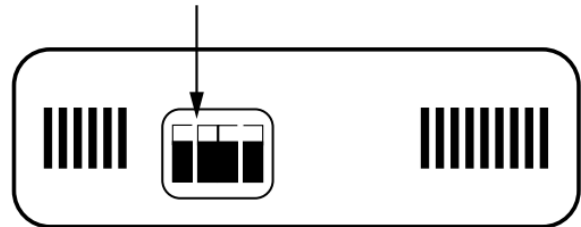

SWITCH 1	ON = Read/Write ⚠
	OFF = Read-Only
SWITCH 2	ON = Hide Write Protect
	OFF = Report Write Protect
SWITCH 3	ON = Hide Write Errors
	OFF = Report Write Errors
SWITCH 4	No Function

* Default setting is OFF for all switches

FIRMWARE UPDATES

Free firmware updates are provided for Tableau Forensic products on a regular basis through the Tableau Firmware Update (TFU) utility. Reference the Tableau Download Center webpage for more information: security.opentext.com/tableau/download-center

SUPPORT

For Tableau Forensic product support: opentext.com/support/contact/guidance

ABOUT OPENTEXT

OpenText, The Information Company, enables organizations to gain insight through market-leading information management solutions, on-premises or in the cloud. For more information about OpenText (NASDAQ: OTEX, TSX: OTEX) [visit: opentext.com](https://opentext.com).

CONNECT WITH US:

- OpenText CEO Mark Barrenechea’s blog


- [Twitter](#) | [LinkedIn](#)

opentext.com/contact

Copyright © 2021 Open Text. All Rights Reserved. Trademarks owned by Open Text.

For more information, visit <https://www.opentext.com/about/copyright-information> • 09.21 | 18895. EN

Documents / Resources

	<p>opentext T8U Tableau Forensic USB Bridge [pdf] User Guide T8U, Tableau Forensic USB Bridge</p>
---	---