



Orbit ML6HT32ASR B-HYVE XD Bluetooth Hose Faucet Timer User Guide

[Home](#) » [Orbit](#) » Orbit ML6HT32ASR B-HYVE XD Bluetooth Hose Faucet Timer User Guide 


Orbit ML6HT32ASR B-HYVE XD Bluetooth Hose Faucet Timer



Contents

- [1 Overview](#)
- [2 PROGRAMMING THE TIMER WITH BLUETOOTH®](#)
- [3 PROGRAMMING THE TIMER AT THE FAUCET](#)
- [4 ADDITIONAL FEATURES](#)
- [5 CUSTOMER SUPPORT](#)
- [6 Documents / Resources](#)
 - [6.1 References](#)
- [7 Related Posts](#)

Overview

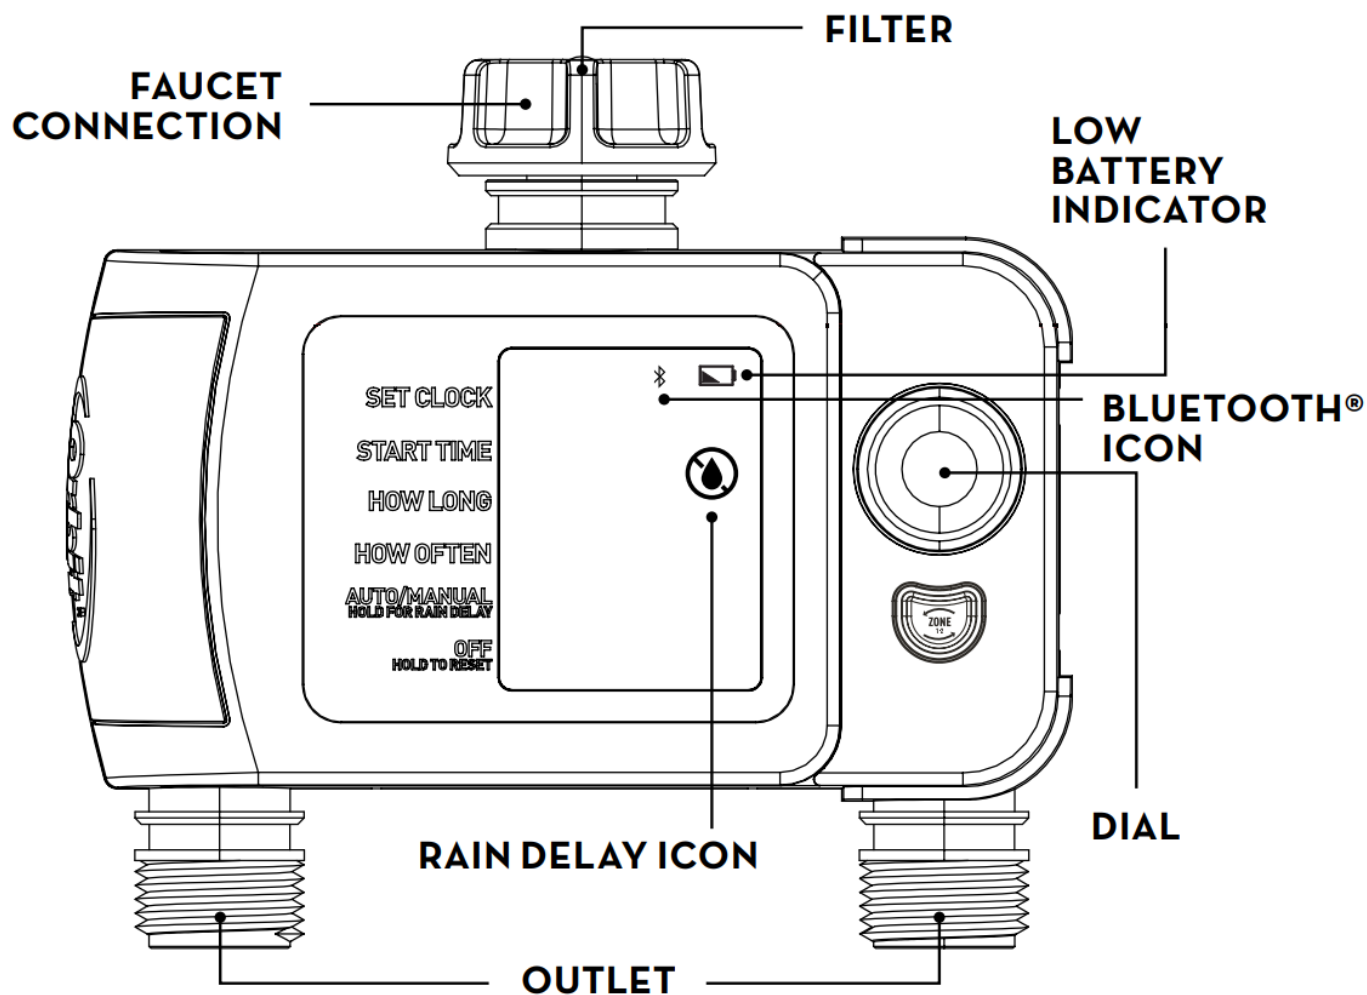

Write down the MAC address: 12 digit alphanumeric code located on the bottom of the timer.

Timer MAC Address: ____ : ____ : ____ : ____ : ____ : ____

Installing The Batteries

Insert two AA (1.5V) alkaline batteries (not included) and replace the tray.

Note: Firmly replace the battery tray to ensure water resistance and increase battery life. You will know the battery tray is fully inserted if it does not pull out easily.



Replace batteries when low battery icon appears on display.



Used up or dead batteries must be removed from the timer and disposed of properly. Do not dispose of batteries in fire. Batteries may explode or leak. Remove batteries when storing timer.

PROGRAMMING THE TIMER WITH BLUETOOTH®

Open the B-hyve® App


Log into your B-hyve account and tap “My B-hyve”. Go to “devices” then “add device”. Select the B-hyve XD timer with two outlets. The app will walk you through the rest of the process.



i For new users, search apps for “B-hyve” and download the free Android or iOS app. Create an account to begin setup.

i The Bluetooth® icon on the display should be flashing indicating the timer is in pairing mode.

i If at any time you need to re-pair or do a factory reset, turn the dial so the arrow is pointing to OFF, press and hold the dial for 5 seconds.

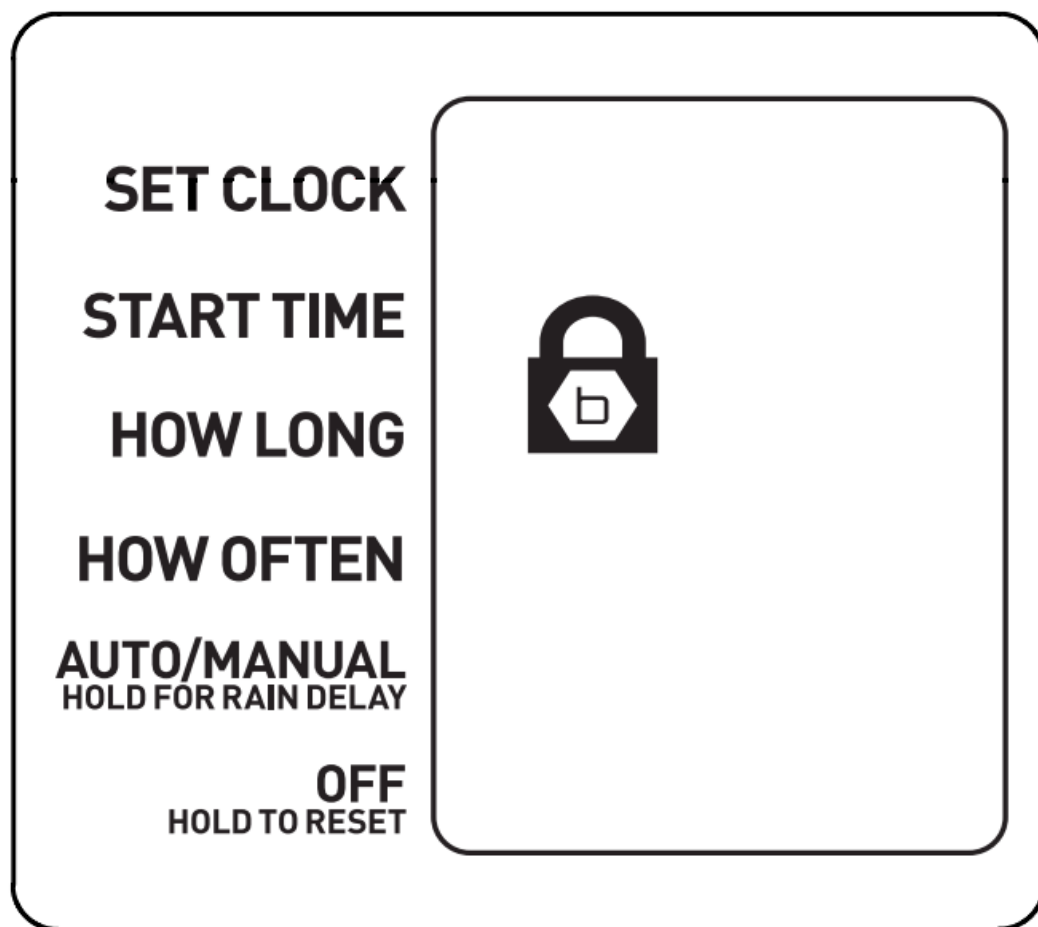

Note: Your LCD will show Lock Icon to indicate that the timer is using the B-hyve app to program your timer.

Note: When the display shows a full screen of symbols release the dial. The display will show 12:00pm in the AUTO/MANUAL mode verifying the reset has been completed. Resetting the timer will erase all programs and it will have to be reprogrammed to your desired watering schedule.

PROGRAMMING THE TIMER AT THE FAUCET

Set Clock

1. Turn the dial so the arrow is pointing to SET CLOCK.

2. Press the dial to select, the hour will begin to flash.
3. Turn the dial until current hour is displayed including the correct AM or PM, then press dial to confirm. The minutes will begin to flash, indicating the next step.
4. Turn the dial until the current minutes are displayed, then press dial to confirm.

Start Time

1. Turn the dial so the arrow is pointing to START TIME.
2. Zone [1] is automatically selected (noted by the box around it.)
3. Press the dial to select, the hour will begin to flash.
4. Turn the dial until the desired start time hour is displayed including the correct AM or PM, then press dial to confirm. The minutes will begin to flash, indicating the next step.
5. Turn the dial until the desired minutes are displayed, then press dial to confirm.

How Long

1. Turn the dial so the arrow is pointing to HOW LONG, zone [1] is automatically selected.
2. Press the dial to select, the minutes will begin to flash.
3. Turn the dial until the desired number of minutes are displayed. Select between 1 to 360 minutes then press dial to confirm

How Often

1. Turn the dial so the arrow is pointing to HOW OFTEN, zone [1] is automatically selected.
2. Press the dial to select, the number will begin to flash.
3. Turn the dial until the desired number of hours or days is displayed, then press to confirm. You may choose to water every 1 hour, 3 hours, 6 hours, 12 hours, or from 1 to 7 days.

Note: 1 is every day, 2 is every other day, etc.

Congratulations!







Zone 1 is now programmed. Turn your dial to AUTO to allow your timer to water according to programmed time and frequency, or complete the steps to program zone 2.

Programming Zone 2

1. Turn the dial so the arrow is pointing to START TIME.
2. Press the ZONE button to select zone [2], this will set Zone 2 as the default station.
3. With Zone 2 now selected, repeat the steps for Start Time, How Long, and How Often.


Congratulations!

Zone 2 is now programmed. Turn your dial to AUTO to allow your timer to water according to programmed time and frequency.

 Orbit® 1.801.299.5555 orbitonline.com			<input type="checkbox"/> Dieline	<input type="checkbox"/> Dims./Callout	<input checked="" type="checkbox"/> Fold	<input type="checkbox"/> Product Coverage	<input type="checkbox"/> Glue
DATE: 12/17/2020			<input type="checkbox"/> PMS 0000	<input type="checkbox"/> PMS 0000	<input type="checkbox"/> PMS 0000	<input type="checkbox"/> PMS 0000	PRINTERS ARE REQUIRED TO MATCH ALL SPECIFIED PMS COLORS.
DESIGNER: QW	MARKETING: DC	 Folded L: _." " W: _." " H: _." "		 Flat W: 22.5" H: 5.5"		 Additional Information • • •	
ARTWORK Nº: 24632-24 rA							
SOFTWARE: Adobe Indesign CC							

Printers are responsible for meeting print production requirements. Any changes must be approved by Orbit®. Printed piece must meet designated specifications on this form.

 © 2020 Orbit Inc. This work is the property of Orbit®, and cannot be used, reproduced or distributed in any way without their express permission.


more information on back 

ADDITIONAL FEATURES

Rain Delay

Rain delay allows you to postpone watering for a set period of time. To access the rain delay, follow the steps below.

1. With the timer in the AUTO/MANUAL mode, press and hold the dial for 3 seconds.
2. The rain delay symbol will appear and the number of days will begin to flash.
3. Turn the dial until the desired number of days is displayed, then press to confirm. You may select a delay of 12 hours, 24 hours, or from 2 to 7 days.
4. Screen will flash between clock and remaining time before programmed cycle resumes.


 To remove a rain delay, press and hold the dial for 3 seconds. The rain delay symbol will turn off and your timer will resume its programmed watering schedule.

Manual/Hand Watering

This feature allows you to water without interrupting your set schedule. To access this feature, follow the steps below.

1. With the arrow pointing to AUTO/MANUAL, press the dial to select.
2. Manual will appear and minutes will begin to flash.
Zone [1] is automatically selected, press ZONE button if you want to manually water from Zone [2]
3. Turn the dial until the desired number of minutes are displayed. Select between 1 to 360 minutes then press dial to confirm.
4. The manual icon will appear and the screen will flash between clock and time remaining before programmed cycle resumes.

Note: There may be a slight delay between the time the dial is pressed and when watering begins.

 To stop manual watering press the dial. The manual watering symbol will turn off and your timer will resume its programmed watering schedule.



If the manual watering runs into the next scheduled event, the next watering event is canceled—manual watering takes priority.

Timer

Range: 150 ft without interference

Pressure Operating Range: 10-100 PSI

Temperature Operating Range:

35°F-122°F (2-50°C)

For Outdoor Use With Cold Water Only Not For Use With Appliances

FCC Statement: FCC ID: ML6HT32ASR

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC Warning: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement.

The device can be used in portable exposure condition without restriction.

IC Statement: IC: 3330A-HT32ASR

This device complies with Industry Canada license exempt RSS standard(s). Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. This Class B digital apparatus complies with Canadian ICES003.

CUSTOMER SUPPORT

Need Help?

If you encounter a problem, please use the following resources before retuning your B-hyve to the store.
Scan the QR Code to access the help page online.



text us

[801-905-8260](tel:801-905-8260)



email us

support@orbitbhyve.com



call us

1-[801-299-5555](tel:801-299-5555)

or visit us at:



orbitonline.com



You are here

A B-hyve Wi-Fi Hub connection
gives you control from anywhere



Purchase the B-hyve Wi-Fi Hub
online or at your local retailer

PN # 21027



Documents / Resources



[Orbit ML6HT32ASR B-HYVE XD Bluetooth Hose Faucet Timer](#) [pdf] User Guide
ML6HT32ASR B-HYVE XD Bluetooth Hose Faucet Timer, ML6HT32ASR, B-HYVE XD Bluetooth
h Hose Faucet Timer, XD Bluetooth Hose Faucet Timer, Bluetooth Hose Faucet Timer, Hose Fa
ucet Timer, Faucet Timer, Timer

References

- [🌀 Smart Watering, Sprinkler & Drip Systems – OrbitOnline](#)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.