


Oro Technology BTX02BLE Tire Pressure Monitoring System

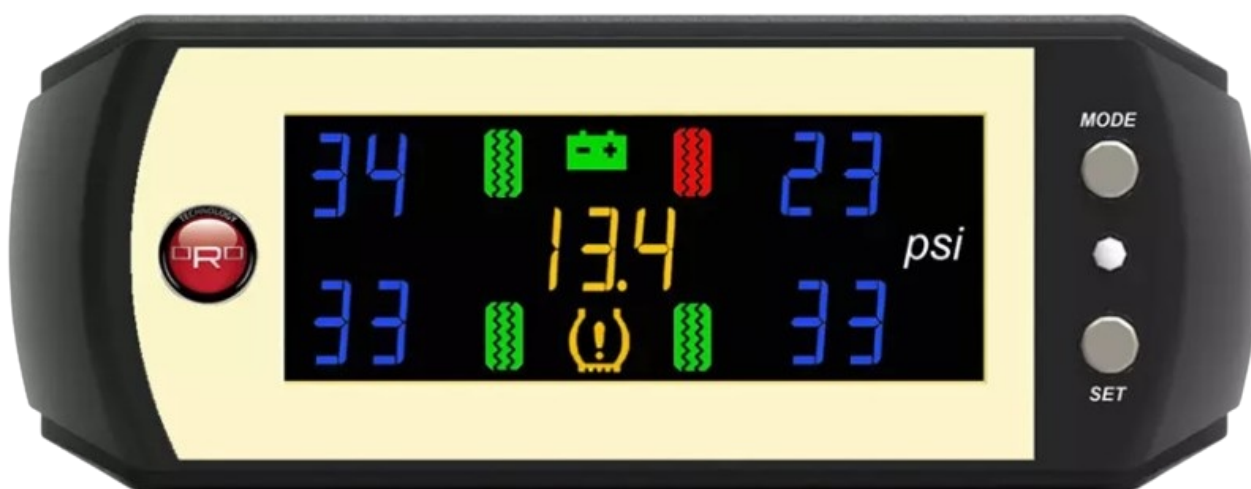

Contents [[hide](#)]

- [1 BTX-202 Specification](#)
- [2 Tire Sensor Installation](#)
- [3 FCC Notices](#)
- [4 Documents / Resources](#)
 - [4.1 References](#)

BTX-202 Specification

Power Supply	3V
Operating Humidity	max 95%
Storage Temperature	-40°C ~ 85°C

Operation Temperature	-20°C ~ 85°C
Pressure Monitoring Range	0 psi ~ 50 psi
Transmitting Frequency	2.4 GHz
Battery capacity	350mAh
Module Weight	13g±0.5g

Tire Sensor Installation

1. Take off the tire and bleed the air. To change to the ORO-Technology TPMS valve



2. Put the sensor to the tire and follow

steps:

Install the tire sensor to the valve.

Use the nylok screw and tighten up with the tire sensor. (Please use the screwdriver to lock the nylok screw using 2.2N m (22.4kg cm) torque)



FCC Notices

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

CAUTION:

Any changes or modifications not expressly approved by the grantee of this device could void the user's authority to operate the equipment.

RF exposure warning:



The equipment complies with FCC RF exposure limits set forth for an uncontrolled environment.

To comply with FCC RF exposure requirements, a minimum separation distance of 20 cm must be maintained between the device and any persons during operation.

The equipment must not be co-located or operating in conjunction with any other antenna or transmitter.



Documents / Resources

  Model: BTX-202	<p>Oro Technology BTX02BLE Tire Pressure Monitoring System [pdf] Instruction Manual</p> <p>BTX02BLE, W55BTX02BLE, BTX-202, BTX02BLE Tire Pressure Monitoring System, BTX02BLE, Tire Pressure Monitoring System, Pressure Monitoring System, Monitoring System</p>
--	---

References

- [User Manual](#)

Leave a comment

Your email address will not be published. Required fields are marked *

Comment *

Name

Email

Website

☐ Save my name, email, and website in this browser for the next time I comment.

Post Comment

Search:

e.g. whirlpool wrf535swhz

Search

[Manuals+](#) | [Upload](#) | [Deep Search](#) | [Privacy Policy](#) | [@manuals.plus](#) | [YouTube](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.