



# OSCIUM WiPry 2500 Spectrum Analyzer User Guide

[Home](#) » [OSCIUM](#) » OSCIUM WiPry 2500 Spectrum Analyzer User Guide 




WiPry 2500 Spectrum Analyzer  
User Guide

## Contents

- [1 WiPry 2500 Spectrum Analyzer](#)
- [2 Documents / Resources](#)
  - [2.1 References](#)
- [3 Related Posts](#)

## WiPry 2500 Spectrum Analyzer

1.

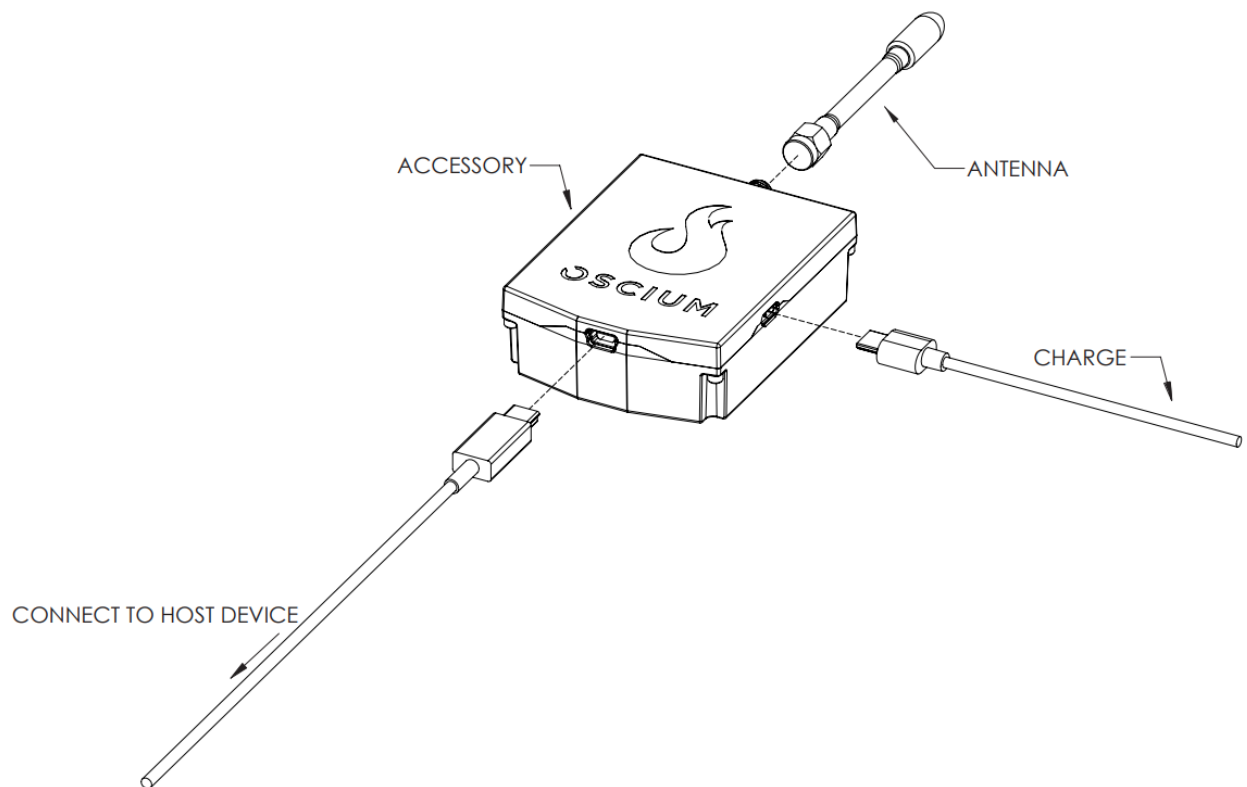

Screw RP-SMA antenna into the appropriate port.

2. Download “WiPry” in either the App Store or on Google Play. PC & Mac versions are available at [oscium.com/quickstart](https://www.oscium.com/quickstart)
3. Insert cable into both the accessory and the host device.
4. When the software is connected to the WiPry 2500x hardware, a red light will illuminate near the antenna connector.
5. Attach velcro to the backs of both the accessory and the host device.
6. Rechargeable batteries included. After use, disconnect host device. Insert charge cable for overnight charge (four hours = full charge).

\*\*\*Batteries required to enable SSID's on iOS, PC, Mac.\*\*\*




More on 2500

<https://www.oscium.com/quickstart>

Android, Google Play and the Google Play logo are trademarks of Google Inc. iPad, iPhone, and iPod touch are trademarks of Apple Inc, registered in the U.S. and other countries. iPad Air, iPad mini, and Lightning are trademarks of Apple Inc.

## Documents / Resources



[OSCIUM WiPry 2500 Spectrum Analyzer](#) [pdf] User Guide  
WiPry 2500 Spectrum Analyzer, WiPry 2500, Spectrum Analyzer, Analyzer

## References

- [🔥 Quickstart Guide | Oscium](#)
- [🔥 Oscium Releases New Wi-Fi 6/6E Spectrum Analyzer](#)