OSH D-TERMO4 DIN Rail Mount Temperature Controller Instructions

Contents

1 OSH D-TERMO4 DIN Rail Mount Temperature Controller
2 Description
3 Applications
4 Installation
5 Features
6 Technical data
7 Documents / Resources
7.1 References

ONLY SMART HOME

OSH D-TERMO4 DIN Rail Mount Temperature Controller

Description

The D-TERMO4 is a programmable thermostat to control 2-pipe Fan Coil Units. It incorporates 4 relays with a common point that can range from low DC voltage to 230VAC. The D-TERMO4 needs to be installed in a keypad with an air temperature sensor (OT-T_SXY or OT-MF-XY (1)).

Applications

Control of climatization by 2-pipe FCUs at homes, shops, hospitals, clinics and hotels.

Installation

The D-TERMO4 is to be mounted on DIN Rail, occupying 2 modules of 17.5 mm.

Features

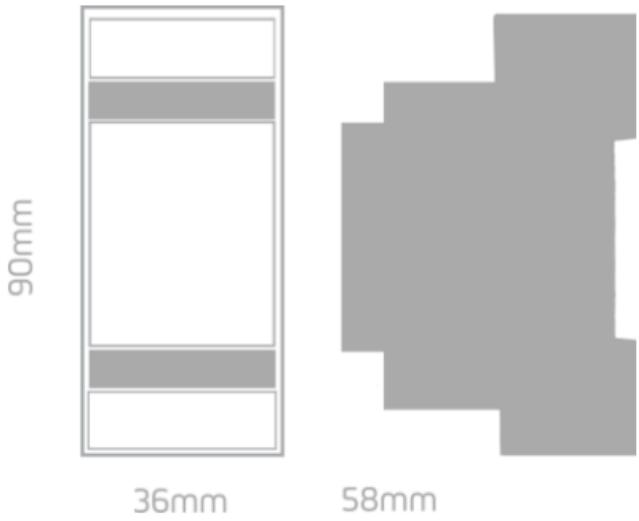

3-speed ventilation
Heating or cooling electrothermal shut-off valve.

Technical data

- Power supply 110/230V⁓ 50/60Hz
- Consumption < 0.5W
- Relay contacts: Rated load 5A at 250VAC 5A at 30VDC
- Max. switching voltage 250VAC, 30VDC
- Max. switching current 5A
- Ingress protection IP IP20

Danger – Electric Shock Risk!
Switch off the power before any intervention. Handling by qualified and authorized persons only.
D-TERMO4 must have firmware version ≥ to V4.0 to work with OT-MF-XY

Documents / Resources

	OSH D-TERMO4 DIN Rail Mount Temperature Controller [pdf] Instructions D-TERMO4 DIN Rail Mount Temperature Controller, D-TERMO4, DIN Rail Mount Temperature Controller, Rail Mount Temperature Controller, Mount Temperature Controller, Temperature Controller, Controller

References

- User Manual

Manuals+, Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.