



OTON TECHNOLOGY Hyper C2000 IP PTZ Camera Controller User Manual

[Home](#) » [OTON TECHNOLOGY](#) » OTON TECHNOLOGY Hyper C2000 IP PTZ Camera Controller User Manual 

*OTON TECHNOLOGY Hyper C2000 IP PTZ
Camera Controller User Manual*

* IP PTZ Camera Controller *

Model No.:Hyper C2000

Model No.: Hyper C2000

Hyper C2000, a network(IP Based) PTZ camera controller, is fully compatible with many PTZ camera coding protocols from the main manufacturers in the market, supporting ONVIF, VISCA, Serial port VISCA, PELCO-D/P protocols and etc. This compact camera controller features a high-quality joystick that allows variable speed control, as well as fast camera switching, quick-set camera parameters and so on.

The industrial-grade blue screen LCD module has excellent display effect with fine and clear characters.



Contents

- [1 Features](#)
- [2 Specifications:](#)
- [3 Diagram \(Unit: mm\)](#)
- [4 Documents / Resources](#)
- [5 Related Posts](#)

Features

- Supporting ONVIF, VISCA, Serial port VISCA, PELCO-D/P protocols and
- RJ45, RS422, RS232 control interfaces; Control up to 255
- Unique control code learning function allows customers to modify the control code instructions
- Any device on the RS485 bus can be individually configured with different protocols and baud
- All camera parameters can be set through the button
- Metal shell, silicone key
- LCD display, keypad sound prompt, real-time display decoder and matrix working
- 4D joystick allows variable speed control to cameras
- Maximum communication distance: 1200M(0.5MM Twisted-Pair Cable)



Specifications:

Port	<p>Network: RJ45.</p> <p>Serial Port: RS422, RS232</p>
Protocol	<p>Network : ONVIF, VISCA</p>


	<p>Serial Port: VISCA, PELCO-D, PELCO-P</p>
Communication BPS	<p>2400bps, 4800bps, 9600bps, 19200bps, 38400, 115200</p>
Interface	<p>5PIN, RS232, RJ45</p>
Joystick	<p>4D up, down, left, right, zoom, lock</p>
Display	<p>LCD Blue Screen</p>
prompt tone	<p>ON/OFF</p>
Power Supply	<p>DC12V±10%</p>
Power Consumption	<p>6W MAX</p>
Working Temperature	<p>-10°C 50°C</p>

Storage Temperature	-20°C 70°C
Environment humidity	≤90%RH (nodew)
Dimensions(mm)	320mm L X179.3mm W X109.9mm(H)
Upgrade	WEB Upgrading

Diagram (Unit: mm)

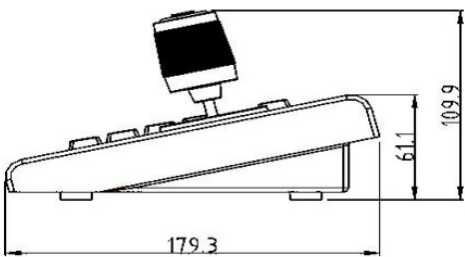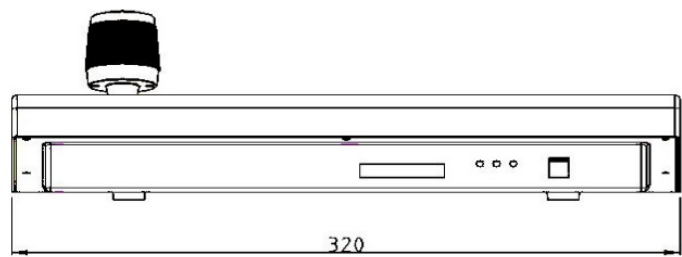

Documents / Resources

	OTON TECHNOLOGY Hyper C2000 IP PTZ Camera Controller [pdf] User Manual Hyper C2000, IP PTZ Camera Controller
---	---