

Contents [[hide](#)]

[1 Oumeike B04-25FLB-P003-B LED Flood Light With Motion Sensor](#)

[2 Component and structure diagrams](#)

[3 How to install](#)

[4 Parameter](#)

[5 Notification](#)

[6 Routine maintenance](#)

[7 Documents / Resources](#)

[7.1 References](#)

Oumeike

Oumeike B04-25FLB-P003-B LED Flood Light With Motion Sensor



LED Flood Light with motion sensor


Thank you for purchasing our products. To ensure a better shopping experience, please

follow the instructions for use step by step.

WARVING

1. The LED module can't be replaced, you need to replace the entire lamp if it damaged or reach the service life.
2. If the wire is damaged, the lamp can no longer be used and needs to be scrapped.
3. If the casing breaks or water enters, the lamp can no longer be used and needs to be scrapped.
4. Do not stare at the LED light-emitting surface closely for a long time, to prevent the hurt of the eye.
5. Under no circumstances should the luminaire be covered by a thermal pad or similar material.
6. The Lamp requires professional electrician to install.
7. The IP66 waterproof grade is just for rainproof, the lamp can not be immersed in water, otherwise it may cause leakage.
8. The terminal block is not included. (Please prepare the terminal block according to your actual needs)


Component and structure diagrams

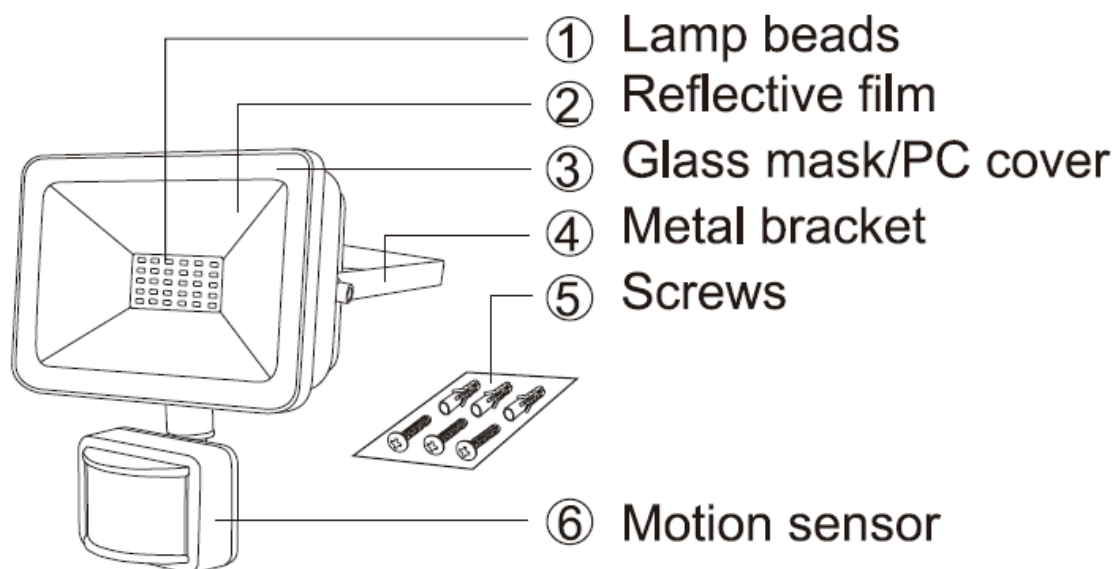


How to install

1. Step 1: Drill two mounting holes according to the distance of the screw holes on the


bracket.

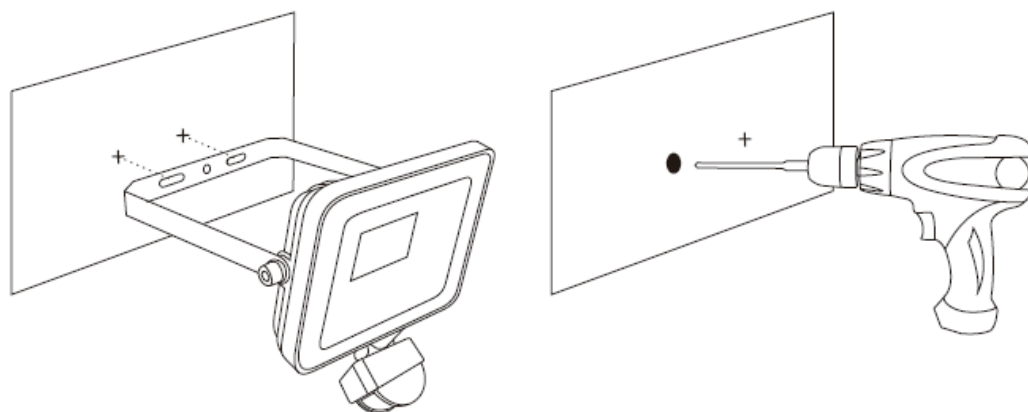


2. Step 2: Put expansion screws in the prepared mounting holes, then place the bracket in the mounting position and fix with screws.

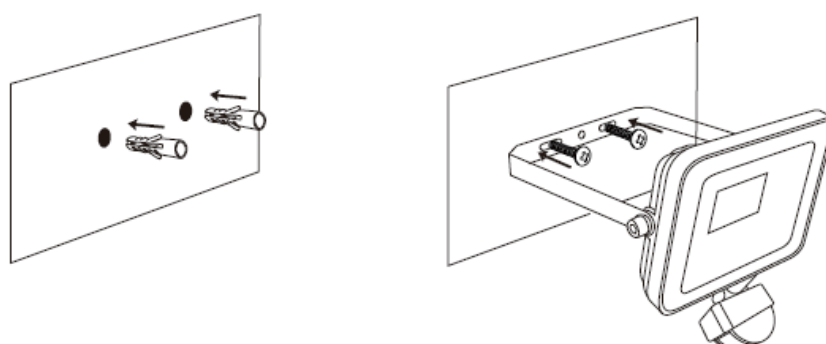

3. Step 3: Adjust the direction of light and the inspection range of the sensor as needed.

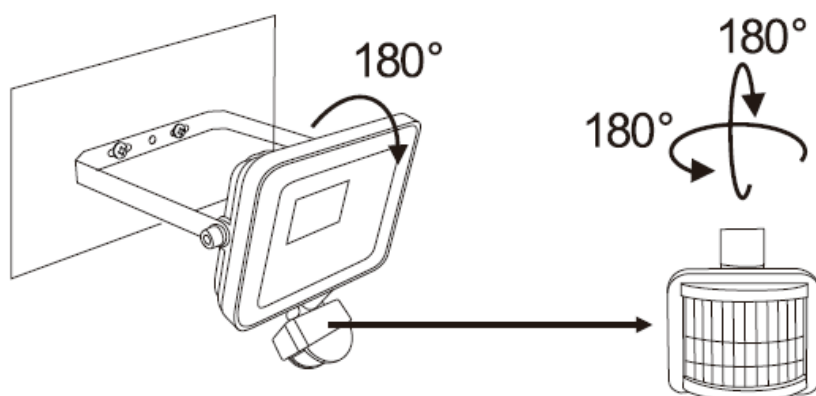


4. Step 4: Connect the wires. Plastic-clad aluminum

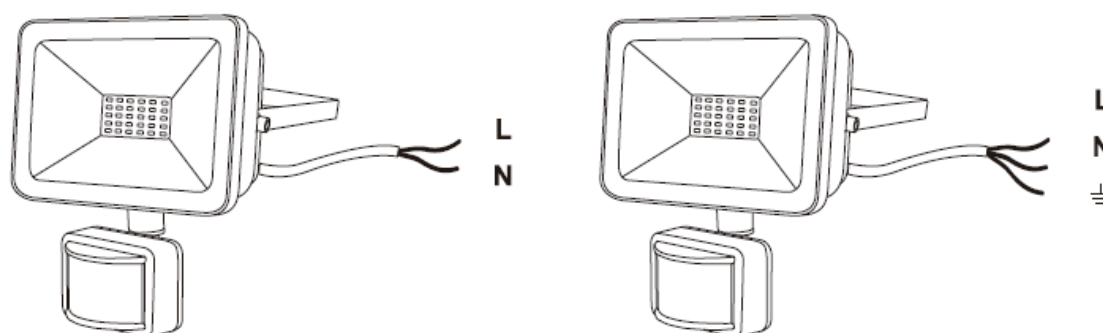





5. Step 5: Adjust the TIME, LUX switch at the bottom of the sensor according to actual needs. (Please confirm which sensor you purchased, and then adjust it according to the instructions)

Parameter

Model	Power	Lighting Range	Installation Height	CRI	Color Temperature	Luminous Flux	Beam Angle	IP Rating	Input voltage		Ta
									US	UK	
FLB015	15W	3-4M	2.5-3.5M	>80	2700K/6500K	1200LM	120°	IP66	AC120V/60Hz	AC230V/50Hz	-25°C~40°C
FLB025	25W	3-4M	2.5-3.5M	>80	2700K/6500K	2100LM	120°	IP66	AC120V/60Hz	AC230V/50Hz	-25°C~40°C
FLB035	35W	4-6M	3.5-5.0M	>80	2700K/6500K	3000LM	120°	IP66	AC120V/60Hz	AC230V/50Hz	-25°C~40°C
FLB050	50W	6-8M	5.0-7.0M	>80	2700K/6500K	4300LM	120°	IP66	AC120V/60Hz	AC230V/50Hz	-25°C~40°C
FLB060	60W	6-8M	5.0-7.0M	>80	2700K/6500K	5200LM	120°	IP66	AC120V/60Hz	AC230V/50Hz	-25°C~40°C



-  Lighting Time Switch: Press the switch 5S-45s-120s-600S cycle.
- The indicator light will stay on when switch to corresponding mode.
-  Working Mode Switch: Press the switch Sun-Moon cycle.
-  Day mode: Lights up during the day and night, 24 hours working.
-  Night Mode: Only work at night.
- The indicator light will stay on when switch to corresponding mode.

Notification

The detection distance depends on the ambient temperature. If the ambient temperature is close to or higher than the human body temperature, the sensing detection distance will become shorter.

This means you need to get closer to this light. Conversely, if the ambient temperature is lower than the human body temperature, this sensing detection distance will be farther.

Routine maintenance

1. To ensure better lighting, please clean the fixtures regularly.
2. Before maintenance, make sure the power is disconnected.

3. To avoid damage of the lamp, please do not clean it with chemicals.

Manufacturer: Shenzhen Oumeike Lighting Technology Co., Ltd.

- Address: No. 19-20, Anye Road, Yuanshan Street, Longgang District,
- Shenzhen, Guangdong, China E-mail: infoous@163.com

CET PRODUCT SERVICE LTD.

- UK REP Beacon House Stokenchurch Business Park, Ibstone Rd,
- Stokenchurch High Wycombe HP14 3FE UK
- Tel:+447419325266 E-mail: info@cetproduct.com



Documents / Resources

	<p>Oumeike B04-25FLB-P003-B LED Flood Light With Motion Sensor [pdf] Instruction Manual</p> <p>B04-25FLB-P003-B, B04-25FLB-P003-B LED Flood Light With Motion Sensor, LED Flood Light With Motion Sensor, Flood Light With Motion Sensor, Motion Sensor</p>
--	---

References

- [User Manual](#)

■ Oumeike

🔍 B04-25FLB-P003-B, B04-25FLB-P003-B LED Flood Light With Motion Sensor, Flood Light with Motion Sensor, LED Flood Light with Motion Sensor, Motion Sensor, Oumeike

Leave a comment

Your email address will not be published. Required fields are marked *

Comment *

Name

Email

Website

☐ Save my name, email, and website in this browser for the next time I comment.

Post Comment

Search:

e.g. whirlpool wrf535swhz

Search

[Manuals+](#) | [Upload](#) | [Deep Search](#) | [Privacy Policy](#) | [@manuals.plus](#) | [YouTube](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.