



PAC SWI-RC-1 Steering Wheel Control Interface User Guide

[Home](#) » [PAC](#) » PAC SWI-RC-1 Steering Wheel Control Interface User Guide 



Quick Start Guide
SWI-RC-1
Steering Wheel Control Interface

Simple, clear, and specific installation information is provided through the SWI-RC-1 Web APP!

Contents

- [1 SWI-RC-1 Steering Wheel Control Interface](#)
- [2 Manual Programming](#)
- [3 Button Re-assignment Procedure](#)
- [4 Troubleshooting and FAQ](#)
- [5 Documents / Resources](#)
 - [5.1 References](#)
- [6 Related Posts](#)

SWI-RC-1 Steering Wheel Control Interface

PAC [f](#) [v](#) [i](#) [DEALER ORDERING](#) [SEARCH BY VEHICLE](#)

[PRODUCTS](#) [APP DOWNLOADS](#) [SWI GUIDES](#) [FIRMWARE UPDATES](#) [LATEST KIT RELEASES](#) [NEWS](#) [CONTACT](#)

VEHICLE SECTION

Step 1.
Enter PAC Radio Replacement Product:

— OR —
Enter Vehicle Information:
Make

Model

Year

Option

[Don't See Your Vehicle?](#)

Step 2.
Radio

Step 1:

Go to: pac-audio.com/swi-rc-1 on your PC or mobile device and select your device, vehicle, and radio.

PAC [f](#) [v](#) [i](#) [DEALER ORDERING](#) [SEARCH BY VEHICLE](#)

[PRODUCTS](#) [APP DOWNLOADS](#) [SWI GUIDES](#) [FIRMWARE UPDATES](#) [LATEST KIT RELEASES](#) [NEWS](#) [CONTACT](#)

DIP-SWITCH SETTING

Your selection:
Radio: Alpine Make: Ford Model: F-150 Year: 2016 Option: No Option

Please set the dip-switches as shown in the image below.

1 2 3 4 5 6 7 8


ON ↓

1 2 3 4

ON ↓

Step 2:

Set the DIP switches

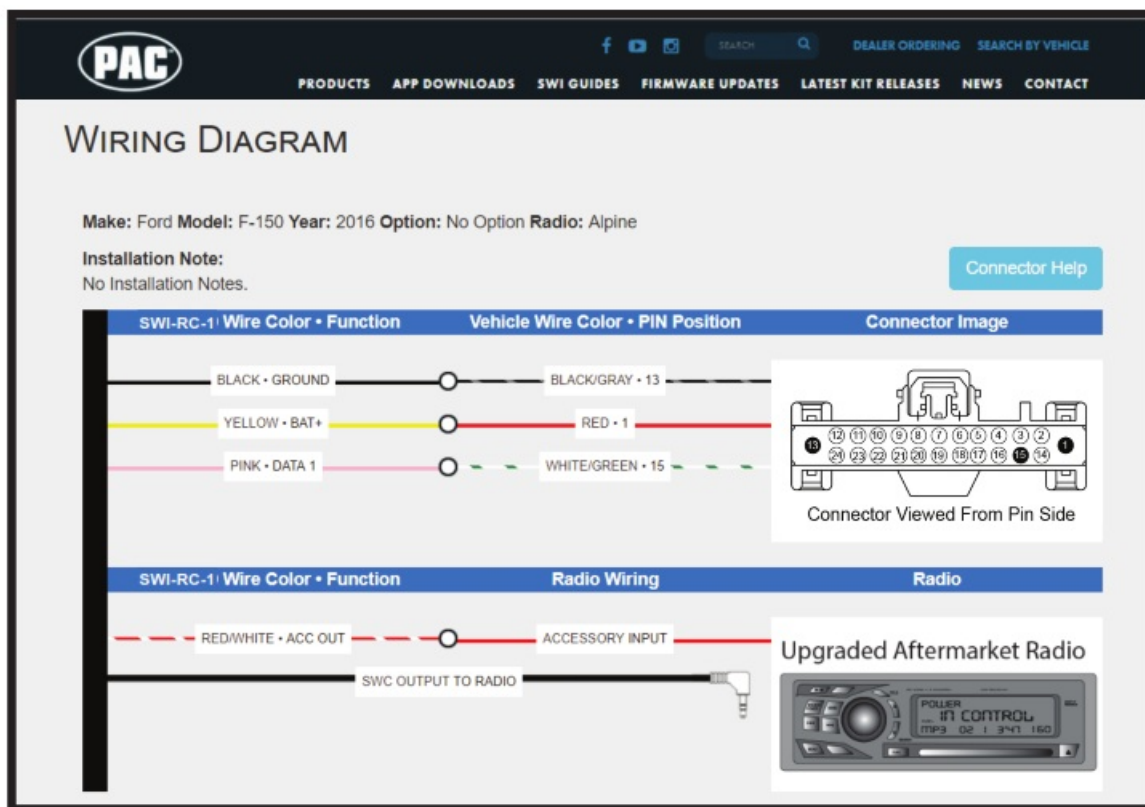

Step 3:

Wire up the module according to the diagram

You're finished!!

© 2019 AAMP Global. All rights reserved. PAC is a Power Brand of AAMP Global. PAC-audio.com

Manual Programming

With this method, the SWC values must be manually programmed into the SWI-RC-1 by using the programming button. The vehicle dipswitches on the side of the interface must all be set to the up (off) position. The radio dipswitches must be set to the proper radio configuration (see below). **PLEASE NOTE: This mode is only compatible with vehicles with both analog SWC and a discrete 12v Accessory wire. Vehicles with CAN-Bus buttons cannot be manually programmed.**

1. Set the radio dipswitches according to the chart below.
2. Wire up the interface according to the installation instructions in the application.
3. Connect the SWI-RC-1 to the vehicle.
4. You can now follow the programming instructions below.

	Set DIP switches that correspond with your radio to the ON position. Set all other DIP switches to the OFF position.						
Alpine	JVC	Kenwood / Lightning Audio	Clarion / Nakamichi	2-Wire Resistive	Pioneer / Other*	Sony	Fusion
1	2	1 & 2	3	2 & 3	1, 2, & 3	4	1 & 4

*Other - Dual / Axxera (these brands could also have 2-wire resistive), Jensen, Rockford Fosgate

Please read each of the following steps to familiarize yourself with the process before beginning. The interface must be programmed in the specific order shown in the chart below

1. Turn the key to the ignition position. The LED will illuminate red.
2. Press and hold the programming button on the side of the interface until the LED illuminates green. Release the programming button.
3. Within 7 seconds, press the button that is to be learned on the steering wheel. At this point you have two options:
 - a. For short press functionality:** Hold the button on the steering wheel until the LED changes from green to red.
Release the button.
 - b. For long press functionality:** Continue to hold the button until the LED flashes between red and amber once.
Release the button.
4. If you need to program more buttons, repeat step 3 for each additional audio function on the steering wheel.
5. If you come across a function in the chart that your steering wheel does not have, or you do not want to program, press and release the program button on the side of the interface to skip that function. The LED will turn off and then back on when the skip has been done successfully.
6. Once programming is completed, wait seven seconds. The LED will flash green 3 times indicating the end of programming.
7. Test the interface for proper functionality. Whenever an SWC button has pressed the LED on the interface should blink green.
If any function does not work, repeat the programming steps.

Radio Function Mapping Order

	Alpine	JVC	Kenwood / Lightning Audio	Clarion / Nakamichi	2-Wire Resistive	Pioneer	Other *	Sony	Fusion
--	--------	-----	---------------------------------	------------------------	------------------	---------	---------	------	--------

1	Volume +	Volume +	Volume +	Volume +	No specific programming order. Please refer to the owners manual of your particular radio for programming instructions.	Volume +	Volume +	Volume +
2	Volume –	Volume –	Volume –	Volume –	Volume –	Volume –	Volume –	Volume –
3	Mute	Mute	Mute	Mute	Mute	Mute	Mute	Mute
4	Preset +	Source	Source	Source	Preset +	Preset +	Preset +	Source
5	Preset –	Track +	Play	Search +	Preset –	Preset –	Preset –	Track +
6	Source	Track –	Track +	Search –	Source	Source / End Call	Source / End Call	Track –
7	Track +	Band / Disc +	Track –	Band	Track +	Track +	Track +	Audio

8	Track –	Pres et / Disc –	Disc / FM +	Se nd / En d	Track –	Tr a c k –	Track –	P o w e r
9	Power	Sele ct	Disc / AM –	Se nd	Band	B a n d	Band	
10	Enter / Play	Atten uation	Answe r	En d	Phone Menu	A n s w e r **	Power / En d Call	
11	Band / Program	Phon e Re ceive	Voice Dial	VR	Answer Call	E n d **	Voice Dial / Answer / End Call	
12	Receive	Phon e Rej ect	On H ook		End Call	P T T **	VR (Androi d Auto & C ar Play) An swer / End Call***	
13	End	Voic e Dia l	Off H ook		VR			
14	VR	Pow er	Mute					
15			Prese t +					
	* Advent, Boyo, D ual, Lightning Audio, Jensen, R ockford Fosgate & Visteon	** Je nson & Ad vent ONL Y	*** X AV-A X100 Only					
Please Note: On any en try with multiple comm ands, the commands s hown are source- dependent.								

Button Re-assignment Procedure

Please read each of the following steps to familiarize yourself with the process before beginning. The buttons must be programmed in the specific order shown in the chart below.

1. Turn the key to the ignition position. The LED will illuminate red.

2. Press and hold the programming button on the side of the interface until the LED illuminates green.
Release the programming button.
 3. Within 7 seconds, press the button that is to be learned on the steering wheel. The LED will turn red when the steering wheel button is pressed. At this point you have two options:
 - a. For short press functionality: Release the button on the steering wheel. The LED will change back to green.
 - b. For long press functionality: Continue to hold the button until the LED flashes between red and amber. Release the button and the LED will change back to green.
 4. Repeat step 3 for each additional button on the steering wheel.
 5. If you come across a function in the chart that your steering wheel does not have, or you do not want to program, press and release the program button on the side of the interface to skip that function. The LED will turn off and back on when the skip has been done successfully.
 6. Once programming is completed, wait seven seconds. The LED will flash green 3 times indicating the end of programming.
 7. Test the interface for proper functionality. Whenever an SWC button has pressed the LED on the interface should blink green. If any function does not work, repeat the programming steps.
- The SWC can always be restored to default settings by pressing and holding the programming button on the side of the interface until the LED illuminates green. Release the programming button, then wait for 7 seconds for the LED to flash 3 times.

[illegible]

3	Mute	Mute	Mute	Mute	Mute	Mute	Mute	Mute
4	Preset +	Source	Source	Source	Preset +	Preset +	Preset +	Source
5	Preset –	Track +	Play	Search +	Preset –	Preset –	Preset –	Track +
6	Source	Track –	Track +	Search –	Source	Source / End Call	Source / End Call	Track –
7	Track +	Band / Disc +	Track –	Band	Track +	Track +	Track +	Audio
8	Track –	Preset / Disc –	Disc / FM +	Send / End	Track –	Track –	Track –	Power
9	Power	Select	Disc / AM –	Send	Band	Band	Band	
10	Enter / Play	Attenuation	Answer	End	Phone Menu	Answer**	Power / End Call	
11	Band / Program	Phone Receive	Voice Dial	VR	Answer Call	End**	Voice Dial / Answer / End Call	
12	Receive	Phone Reject	On Hook		End Call	P T T**	VR (Android Auto & Car Play) Answer / End Call***	

13	End	Voic e Di al	Off Hoo k		VR			
14	VR	Pow er	Mute					
15			Pres et +					
	* Advent, Boyo, Dual, Lightning Audio, Jensen, Rockford Fosg ate & Visteon	** J ens en & A dve nt O NLY	*** X AV-A X10 0 On ly					
Please Note: On any entry with multiple commands, the commands shown are source-dependent.								

Troubleshooting and FAQ

LED Legend			
Color	During Normal Operation	During Manual Programming Mode	During Optional Programming
Solid Red	Accessory on	Waiting on the short press button release	Waiting on the short press button release
Solid Green	N/A	Waiting on the button to be pressed	Waiting on the button to be pressed
Solid Amber	Update Required - Please call tech support	N/A	N/A
Flashing Green	The button is being pressed	N/A	N/A
Flashing Amber every 5 seconds	The module is connected to the PC via USB	N/A	N/A
Flashing Red/Amber	Error - Dipswitch setting on the vehicle switches set to unknown config	Long Press Button detected	Long Press Button detected
Flashing Green/Red	Error - Dipswitch setting on radio switches set to unknown config	N/A	N/A
Flashing Green/Amber/Red	Error - Button not pressed long enough or value of the button is too close to rest value	N/A	N/A

Q. Where can I find the wiring info to connect the SWI-RC-1 to my vehicle?

– **A.** The wiring info can be found on our website @ www.pac-audio.com/swi-rc-1

Q. Where can I find info on setting the DIPswitches on the side of the module?

– **A.** The DIPswitch settings can be found on our website @ www.pac-audio.com/swi-rc-1

Q. The module's LED is flashing a pattern that is not consistent with normal operation.

– **A.** Please reference the LED legend above for your specific case.

Q. Is there a way to perform a master reset to the module?

– **A.** The interface can be reset, when not connected via USB, by pressing and holding the programming button on the side of the interface for seven seconds until the LED turns amber. This reset can only be done while the module is connected to the vehicle.

Q. I have connected all of the wires and set the DIPswitches as instructed. I am having an issue where some or all of the buttons are not functioning correctly or at all.

– **A.** Verify that all of the ground wires (Radio, SWI-RC-1, and steering wheel circuit) are connected at the same place. In some vehicles, the factory ground may not be sufficient ground for all of these wires. In this case please make all ground connections to chassis ground.

Q. I'm looking at your website and I don't see my radio listed (Advent, Boyo, Dual, Lightning Audio, Rockford Fosgate, or Visteon).


– **A.** When installing any of these brands you will need to select Pioneer as your radio



© 2019 AAMP Global. All rights reserved. PAC is a Power Brand of AAMP Global.

PAC-audio.com

Documents / Resources

	<p>PAC SWI-RC-1 Steering Wheel Control Interface [pdf] User Guide SWI-RC-1 Steering Wheel Control Interface, SWI-RC-1, Steering Wheel Control Interface, Wheel Control Interface, Control Interface, Interface</p>
---	--

References

- [PAC SWI-RC-1 Wiring Guide – PAC](#)
- [SWI-RC-1 Wiring Guide – PAC](#)