

Panasonic

Panasonic WPS2 Series Wireless Presentation System



Panasonic WPS2 Series Wireless Presentation System User Guide

[Home](#) » [Panasonic](#) » Panasonic WPS2 Series Wireless Presentation System User Guide 

Contents

- [1 Panasonic WPS2 Series Wireless Presentation System](#)
- [2 FEATURES](#)
- [3 Professional Displays](#)
- [4 Wireless Presentation System](#)
- [5 360 Degree Camera Speakerphone](#)
- [6 Pict Descriptions](#)
- [7 SPECIFICATION](#)
- [8 FAQ](#)
- [9 Documents / Resources](#)
 - [9.1 References](#)
- [10 Related Posts](#)

Panasonic

Panasonic WPS2 Series Wireless Presentation System



Providing a more realistic meeting with the 360-degree camera speakerphone

FEATURES

- High-quality images from a high-performance 360-degree camera Four high-performance cameras provide 360-degree immersive images.
- 360-degree orientation microphone and speaker Covers a 360-degree radius up to 5m/16.4ft for clear sound collection.
- Easy to carry and operate meeting Video and audio data can be sent to your PC with a single USB-C. Diameter 64 mm, height 285 mm, weight approx. 950 g.

Professional Displays

The Professional Displays have a high resolution of 3840 x 2160p and a brightness ranging from 400cd/m² to 700cd/m². These displays are suitable for various applications.

SQ2H

*Actual Resolution:
3840 x 2160p

• DisplayPort (Ver. 1.2)

*1: Some functions are limited.

*only applies for 43-65"

TH-98SQ2H	700cd/m ²				
TH-86SQ2H	700cd/m ²				
TH-75SQ2H	700cd/m ²				
TH-65SQ2H	700cd/m ²				
TH-55SQ2H	700cd/m ²				
TH-50SQ2H	700cd/m ²				
TH-43SQ2H	700cd/m ²				

SQE2

*Actual Resolution:
3840 x 2160p

• DisplayPort (Ver. 1.2)

*1: Some functions are limited.

*only applies for 43-65"

TH-98SQE2	500cd/m ²				
TH-86SQE2	500cd/m ²				
TH-75SQE2	500cd/m ²				
TH-65SQE2	500cd/m ²				
TH-55SQE2	500cd/m ²				
TH-50SQE2	500cd/m ²				
TH-43SQE2	500cd/m ²				

CQE2

*Actual Resolution:
3840 x 2160p

*only applies for 43-65"

TH-98CQE2	500cd/m ²				
TH-86CQE2	400cd/m ²				
TH-75CQE2	400cd/m ²				
TH-65CQE2	500cd/m ²				
TH-55CQE2	500cd/m ²				
TH-50CQE2	500cd/m ²				
TH-43CQE2	500cd/m ²				

Entry

Multi-Touch Screen

CQE2-IR

*Actual Resolution:
3840 x 2160p

TH-86CQE2-IR	400cd/m ²				
TH-75CQE2-IR	400cd/m ²				
TH-65CQE2-IR	500cd/m ²				
TH-55CQE2-IR	500cd/m ²				

LED

AD

*Specifications subject to confirmation

TL-165AD19A*	700cd/m ²				
TL-137AD15A	700cd/m ²				
TL-110AD12A	700cd/m ²				

Wireless Presentation System

The Wireless Presentation System includes receivers, transmitters, and cases for easy screen sharing. It supports communication in the 5GHz band and connects to mobile devices with the appropriate digital AV adaptor.

NEW

1
 Receiver (Box)
 TY-WPR2

2
 Receiver (Board)
 TY-SB01WP

3
 Transmitter (HDMI™/USB-A)
 TY-WPB2

4
 Transmitter (USB-C)
 TY-WPBC2

5
 Transmitter case

Note: The transmitter and receiver are also available separately.

Basic set		Transmitter	
TY-WPS2	TY-WPSC2	TY-WPB2	TY-WPBC2
<div style="border: 1px solid black; padding: 2px; display: inline-block;">1</div> <div style="border: 1px solid black; padding: 2px; display: inline-block;">3</div> x 2 <div style="border: 1px solid black; padding: 2px; display: inline-block;">5</div>	<div style="border: 1px solid black; padding: 2px; display: inline-block;">1</div> <div style="border: 1px solid black; padding: 2px; display: inline-block;">4</div> x 2 <div style="border: 1px solid black; padding: 2px; display: inline-block;">5</div>	<div style="border: 1px solid black; padding: 2px; display: inline-block;">3</div> x 1	<div style="border: 1px solid black; padding: 2px; display: inline-block;">4</div> x 1

360 Degree Camera Speakerphone

The 360 Degree Camera Speakerphone provides a standard multi-touch screen experience with a resolution of 3840 x 2160p. It offers various functions suitable for different display sizes.



PressIT360

**Equipped with
various video modes**




TY-CSP1



WOLFVISION
CYNAP PURE




TY-SBPure SDM



Dual View



Single View



Multi View



Surround View



Stable View

Model Number Legend

**Model Number
Legend**

TH-86SQ2H

Display
body


Screen
size

Display
category

F Full HD
Q 4K UHD

Pict Descriptions

Pict Descriptions

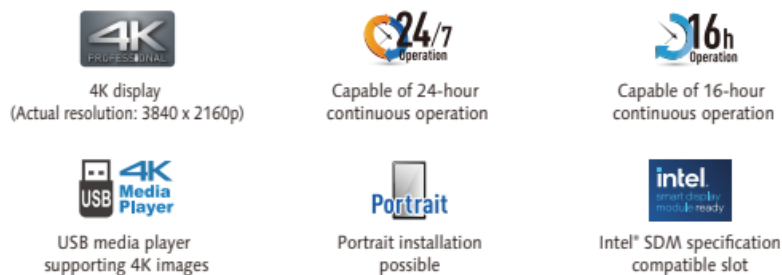

SPECIFICATION

Plug & Play Wireless Presentation System Dongle based wireless presentation system for fast and simple screen sharing

Lineup



	Basic Set		Receiver (Box)	Receiver (Board)	Transmitter (HDMI™/USB-A)	Transmitter (USB-C)
Model	TY-WPS2	TY-WPSC2	TY-WPR2	TY-SB01WP	TY-WPB2	TY-WPBC2
Applicable product	Flat Panel Display /Projector (Panasonic and others)			*Attachable to a display compatible with Intel® SDM specification slot.	PC/Tablet/Smartphone	
What's included?	1 Receiver (Box) x1 3 Transmitter (HDMI™/USB-A) x2 5 Transmitter case x1	1 Receiver (Box) x1 4 Transmitter (USB-C) x2 5 Transmitter case x1	1 Receiver (Box) x1	2 Receiver x1 *Supports only communication in the 5GHz band.	3 Transmitter (HDMI™/USB-A) x1	4 Transmitter (USB-C) x1

Connects to mobile devices
Genuine Digital AV adaptor by Apple is required.

6GHz Wireless LAN adopted

Presents 4 screens in Full HD [supports 4K]

24 channels available

4K UHD video
max. resolution: 3840 x 2160 pixels, 30p transmission

Low latency image

Connects up to 32 transmitters at once

Lock mode prevents interrupts

HDMI™-CEC command compatible

Supports audio transmission

Share screen without transmitter¹

Shared Supports "Multicast" without a router

¹ Firmware update is required. For details, please contact your dealer

Pitch for wall hanging is VESA compliant

NOTE: The availability varies depending on model.

The specifications are subject to change without notice.

For more information about Panasonic Professional Displays,

please visit Display Global Website: <https://eu.connect.panasonic.com/gb/en/professional-displays>



FAQ

What is the maximum resolution supported by the Wireless Presentation System?

The Wireless Presentation System supports a maximum resolution of 3840 x 2160 pixels at 30p transmission.

Which devices can the Wireless Presentation System connect to?

The Wireless Presentation System can connect to mobile devices and requires a genuine Digital AV adaptor by Apple for compatibility.

Documents / Resources



[Panasonic WPS2 Series Wireless Presentation System](#) [pdf] User Guide
WPS2 Series Wireless Presentation System, WPS2 Series, Wireless Presentation System, Presentation System, System

References

- [P Professional Displays | Panasonic Connect](#)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.