



PAX E700 Mini Integrate Smart Terminal Installation Guide

[Home](#) » [Pax](#) » PAX E700 Mini Integrate Smart Terminal Installation Guide 

PAX E700 Mini Integrate Smart Terminal



Contents

- 1 E700Mini Integrate Smart Terminal
- 2 Contents Checklist
- 3 Product Description
- 4 Terminal Ports
- 5 Power ON/OFF
- 6 Specifications
- 7 Load Printer Paper
- 8 Installation and Usage Tips
- 9 Documents / Resources
 - 9.1 References
- 10 Related Posts

E700Mini Integrate Smart Terminal




Note: Product images shown may be different than actual product received

Contents Checklist


Please check the components after unpacking. If any are missing, please contact the dealer.


Part	Qty
E700 Mini	1
AC Power Adapter	1
AC Power Cable	1
Thermal Paper Roll	1
Quick Setup Guide	1

Product Description

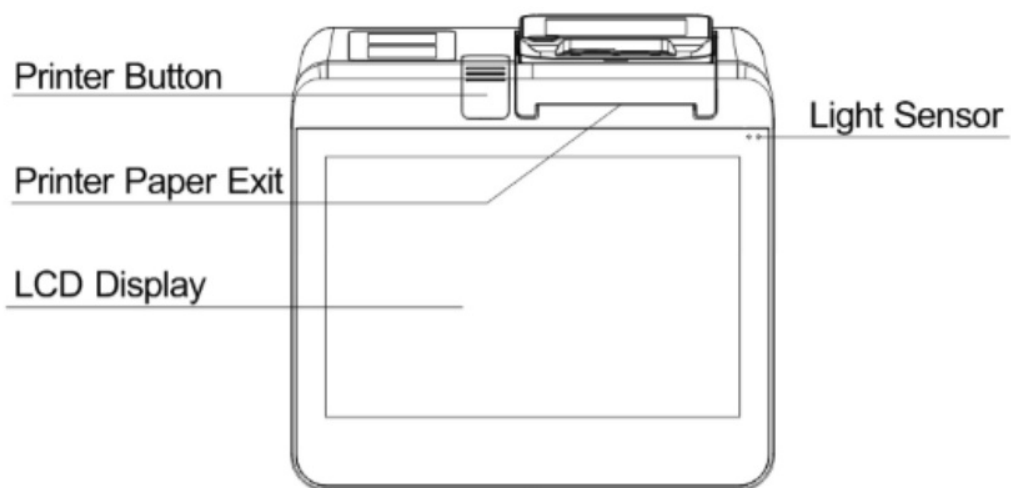

Front View

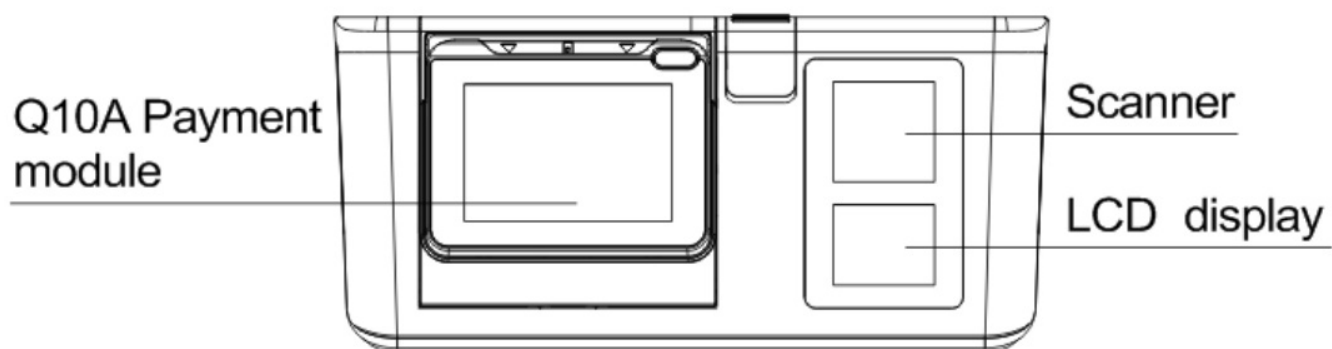

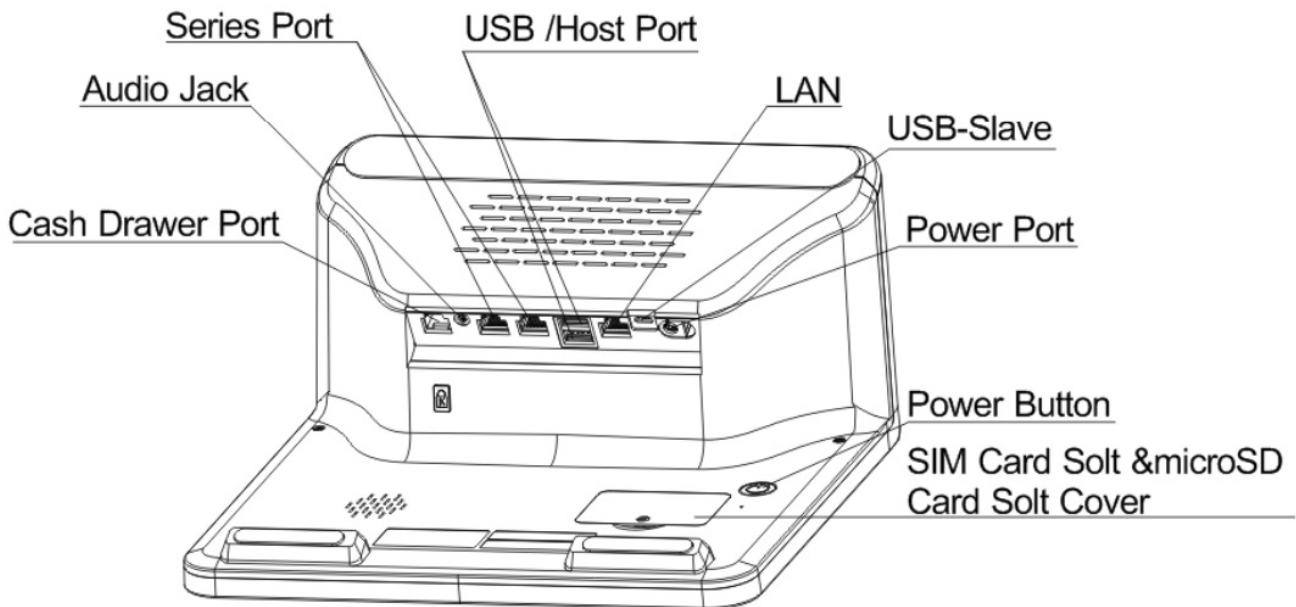

Q10A Payment Module

Terminal Ports

The following ports are accessible on the back of the E700 Mini:

- Power – Connect AC power supply to E700 Mini
- Cash Drawer – Insert the cable from cash drawer to connect with cashregister
- Audio Jack – Allows hearing impaired to connect assistive listening device
- USB Host – Connect USB device
- Series – Used to connect to serial device such as an external POS device
- USB-Slave – Connected to PC for local terminal download
- LAN – Used for bi-directional Ethernet connections Open the back cover to access following ports:
- microSD Card Slot – Open card cover, insert card into microSD card slot

Power ON/OFF

Power on: Press and hold the Power button for three seconds until the main screen displays normally. (See page 2 for the location of the Power button.)

Power off: Press and hold the Power button for three seconds until the shutdown menu displays. Select Power off. The terminal turns off after a few seconds. (See page 2 for the location of the Power button.)

Specifications

Operation System: Android 10.0

CPU: Quad-core Cortex™-A53, 1.8GHz

Memory: 2GB DDR+16GB eMMC

Main Display: 10.1 inch, 1280×800 resolution, capacitive touch screen

Printer: 3" high-speed thermal printer with auto-cutter, printing speed 150mm/s, paper width 80mm, diameter 50mm

Audio: Built-in speaker, support headphone output

L-Sensor (Ambient Light Sensor): Automatically adjusts the back light brightness of the main display.

Wireless Communication: Supports LAN, Wi-Fi®, Bluetooth® Low Energy ,

3G/4G

Peripheral Ports: Power port x 1

USB A ports x 3

USB port x 1

LAN x 1

Cash drawer x 1

Serial port x 1

Audio jack x 1


Card Slot: SIM card slot x 2, unused port microSD card slot x 1

Load Printer Paper

1. When the printer is out of paper, Press the button on the left of printer to open the cover.



2. Load the paper roll into the paper compartment and extend the end of the paper out of the printer.

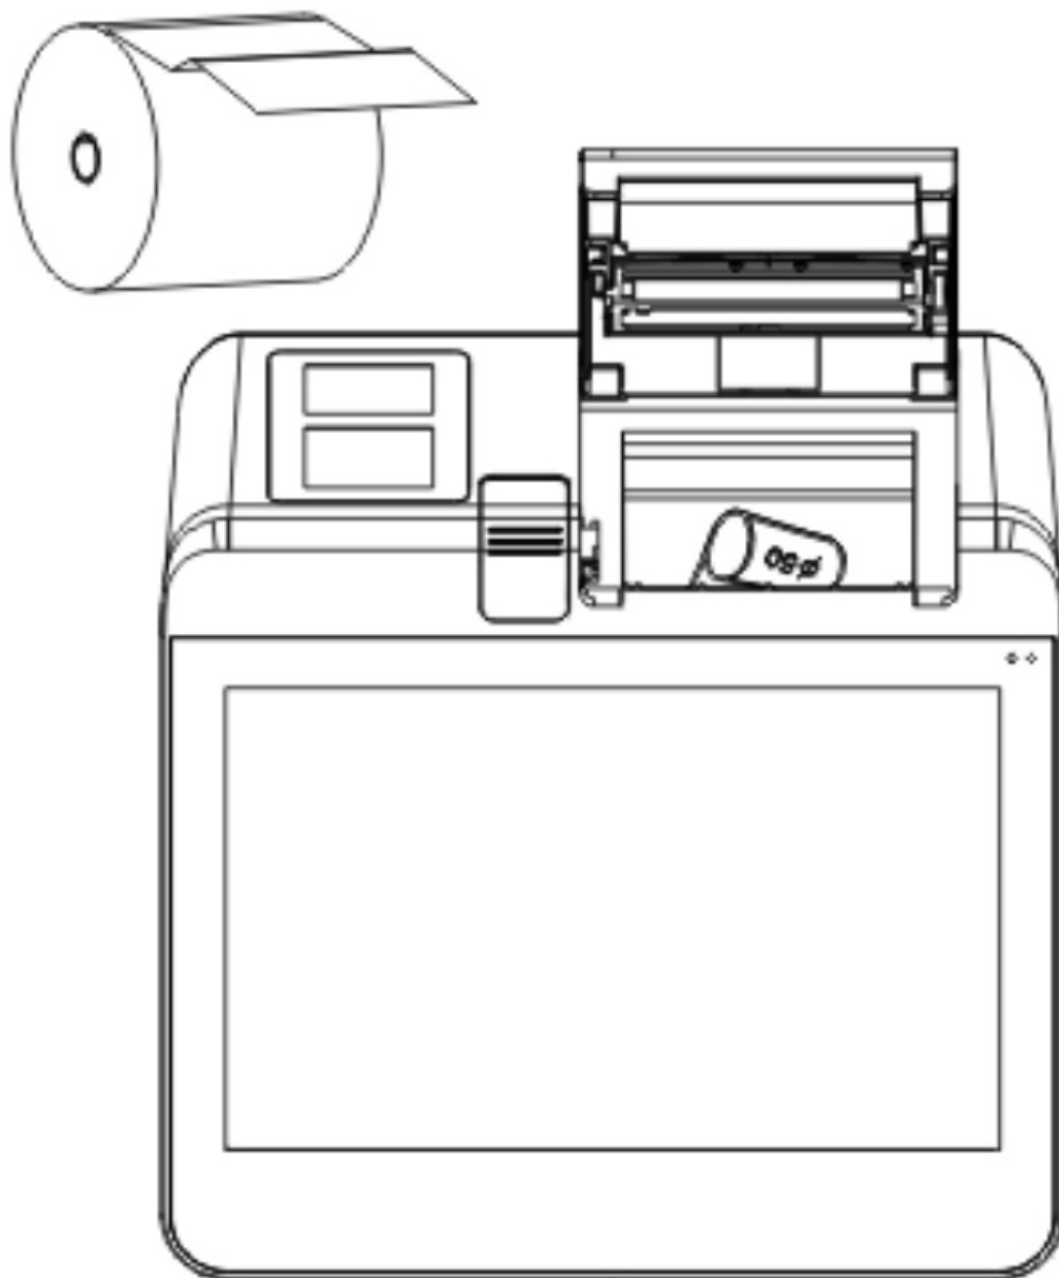

3. Close printer cover. The Paper Out indicator light turns off.



Installation and Usage Tips

- Avoid exposing the device to an excessively hot, humid, dusty, or strong electromagnetic environment.
- Do not vibrate, shake, or drop the device.
- Do not plug or unplug any part of the device while it is powered on.

This may cause damage to an internal circuit.

- Please contact PAX technical support for assistance with the device.

Caution: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. In a domestic environment, this product may cause radio interference in which case the user may be required to take adequate measures.

FCC compliance statement

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

ISED compliance statement

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada’s licence-exempt RSS(s). Operation is subject to the following two conditions:
(1) This device may not cause interference.
(2) This device must accept any interference, including interference that may cause undesired operation of the device.

The user manual for LE-LAN devices shall contain instructions related to the restrictions mentioned in the above sections, namely that:

i. the device for operation in the band 5150–5250 MHz is only for indoor use to reduce the potential for harmful interference to co-channel mobile satellite systems;
Radiation Exposure statement
This equipment complies with FCC/IC RSS-102 radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20 cm between the radiator and your body.

PAX TECHNOLOGY LIMITED reserves the right to change product technology specifications without notifying
PAX TECHNOLOGY LIMITED
Manufacturer: PAX Computer Technology (Shenzhen) Co.,Ltd.
Address:4/F, No.3 Building, Software Park, Second Central Science-Tech Road,

High-Tech Industrial Park, Shenzhen, Guangdong, P.R.C.
Tel: 0755-86169630
Fax: 0755-86169634
Website: <http://www.pax.com.cn>
Responsible Party:PAX Technology, Inc.
8880 Freedom Crossing Trail, Building 400, 3rd Floor Suite 300, Jacksonville , Florida, 32256 Help-desk 1 877-859-0099



Documents / Resources

	<p>PAX E700 Mini Integrate Smart Terminal [pdf] Installation Guide V5PE700MINI, V5PE700MINI, e700mini, E700 Mini Integrate Smart Terminal, E700 Mini, E700 Mini Smart Terminal, Integrate Smart Terminal, Smart Terminal, Terminal</p>
---	--

References

- [PAX Technology](#) | [Global Website](#) | [Payment Terminals](#)

Manuals+.