



## PERFORMANCE iN LIGHTING TYK+ 30 LED Floodlight Instructions

[Home](#) » [PERFORMANCE iN LIGHTING](#) » PERFORMANCE iN LIGHTING TYK+ 30 LED Floodlight Instructions 

### Contents










- [1 PERFORMANCE iN LIGHTING TYK+ 30 LED Floodlight](#)
- [2 1 OPTION A](#)
- [3 1 OPTION B](#)
- [4 5A ON/OFF WIRING](#)
- [5 5B DALI WIRING](#)
- [6 Documents / Resources](#)
  - [6.1 References](#)
- [7 Related Posts](#)




PERFORMANCE iN LIGHTING TYK+ 30 LED Floodlight




**IMPORTANT:** - In order to ensure optimum performance and safety, the luminaire must be correctly installed by qualified personnel, in compliance with the following instructions. - Before performing any maintenance, always remove the voltage with a bipolar switch. - The light source must be replaced only by qualified personnel or by the manufacturer of the luminaire. - Any type of component maintenance can only be carried out by qualified personnel or by the manufacturer of the device. - The following instructions must be kept in a safe place. - Any misuse or any modification of the product not expressly authorised by PERFORMANCE IN LIGHTING S.p.A. is hazardous and makes the warranty nil and void.. - Any reproduction of the contents of this sheet without prior written consent of PERFORMANCE IN LIGHTING S.p.A. is prohibited.


 CLASS II	IP 66	IK 09 10 J	 Max 5.8 kg					 0,5 m	 - 30 °C	 650 °C
$t_a$ 45 °C	 LOOP THROUGH	 Pb-Free	 DALI	LIFETIME 50000 h	 D		RoHS COMPLIANT		EAC	CE

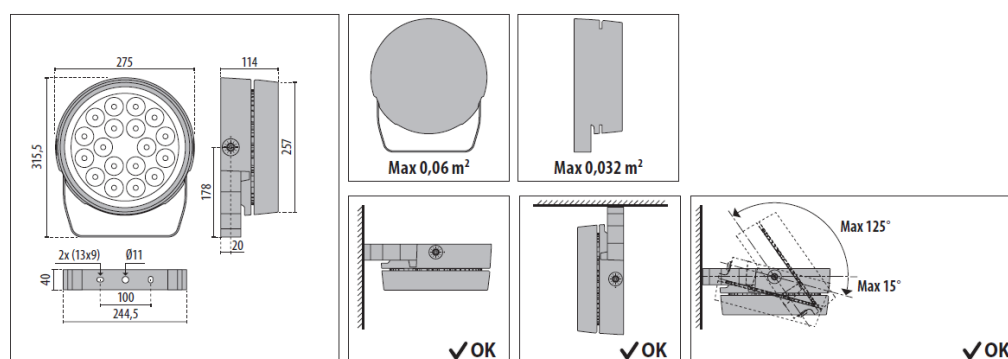


## 1 OPTION A

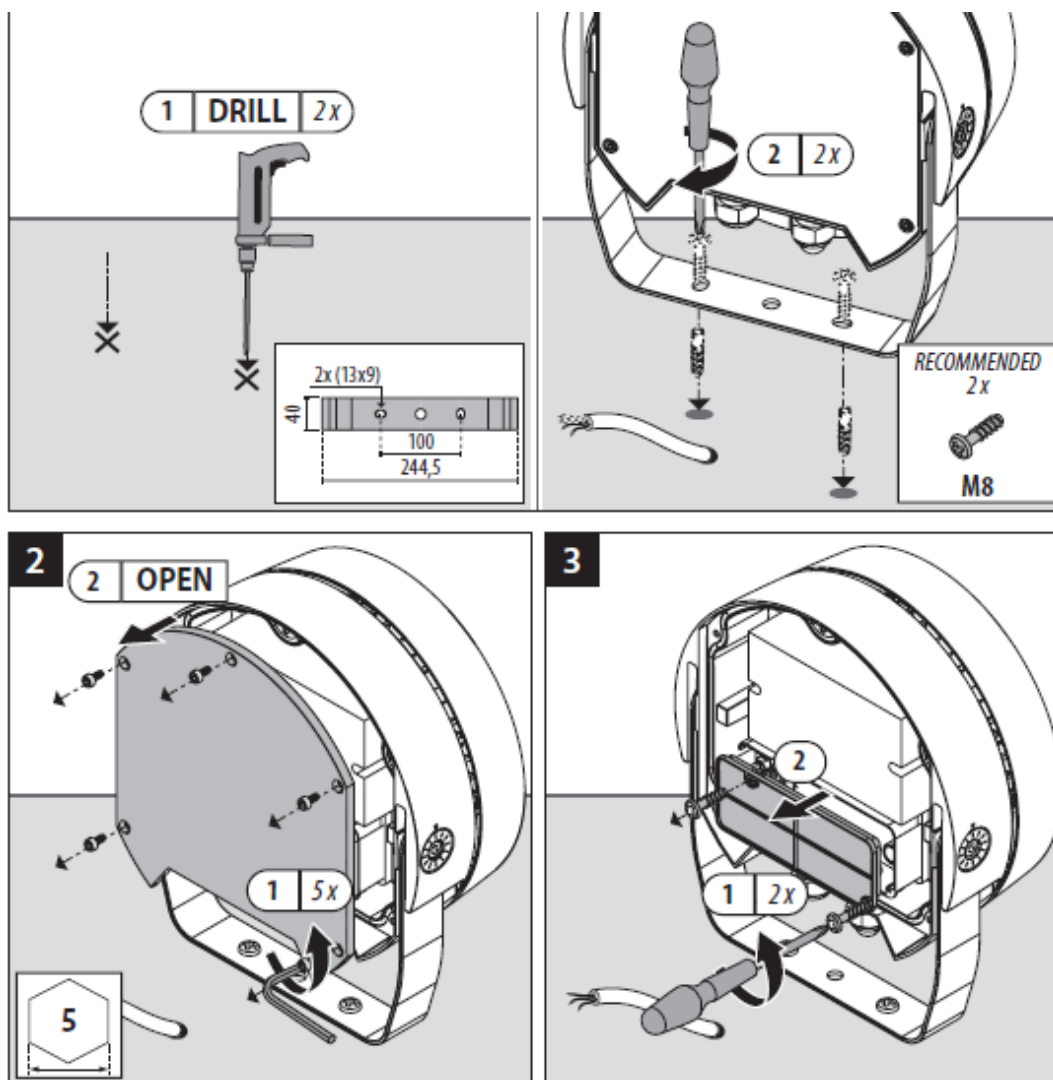





1 OPTION B

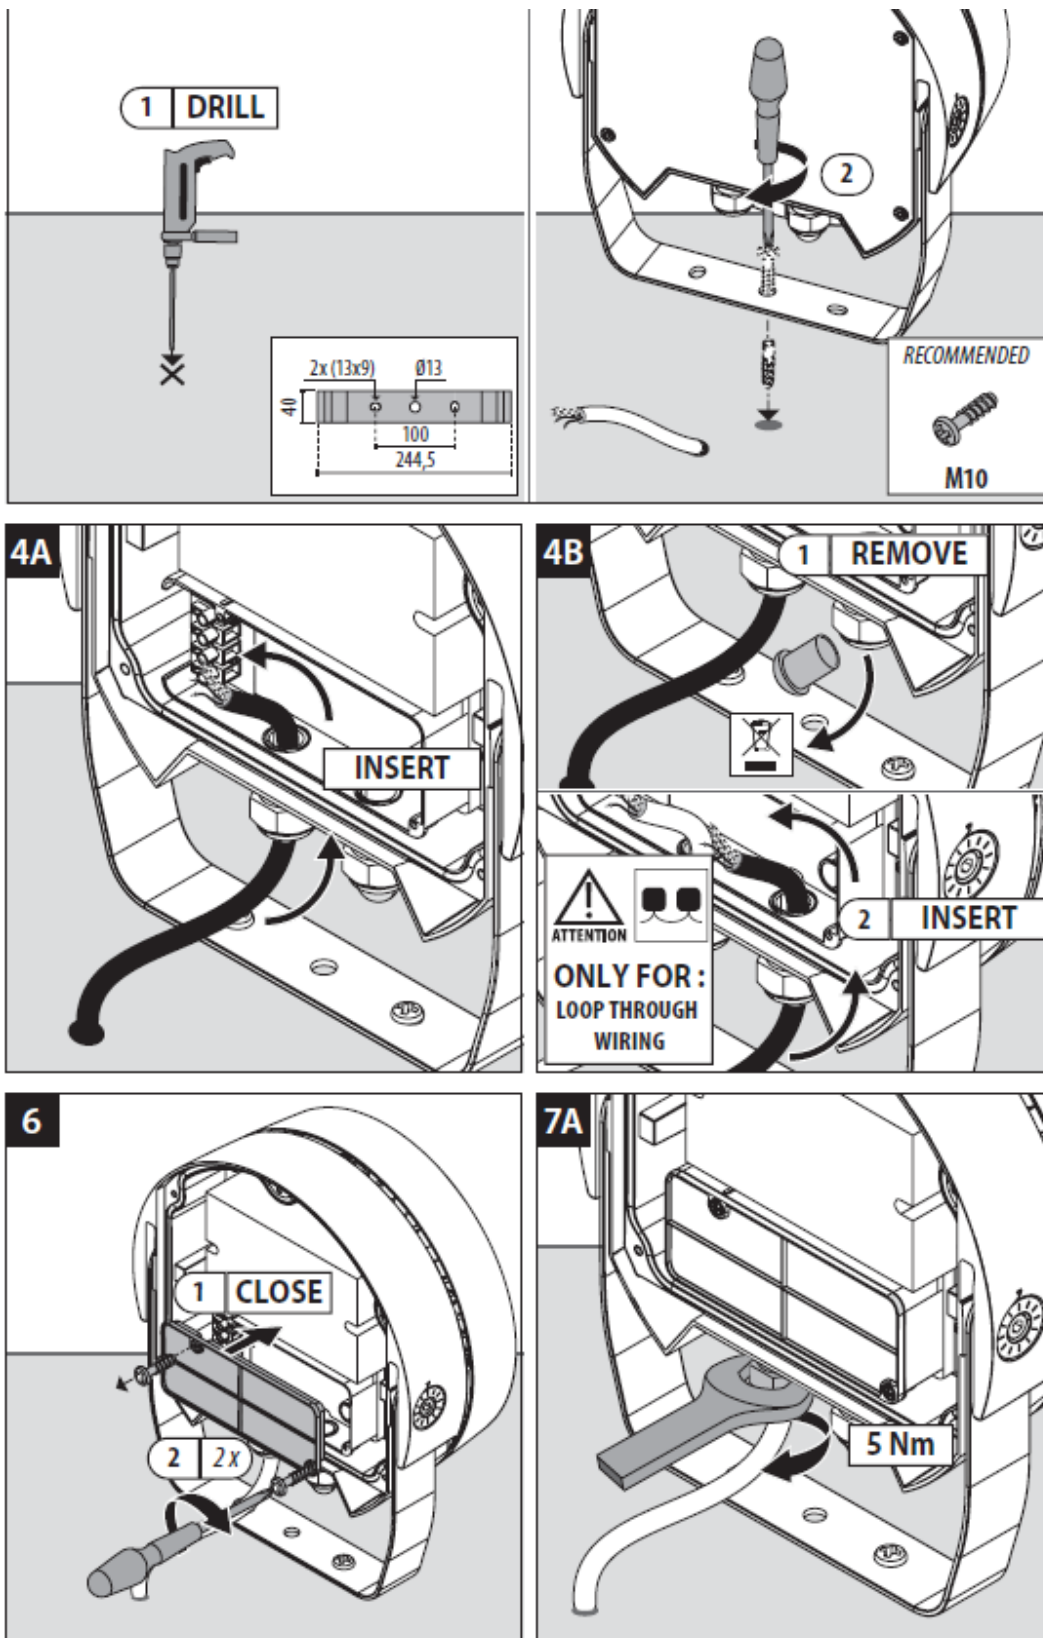

## 5A ON/OFF WIRING

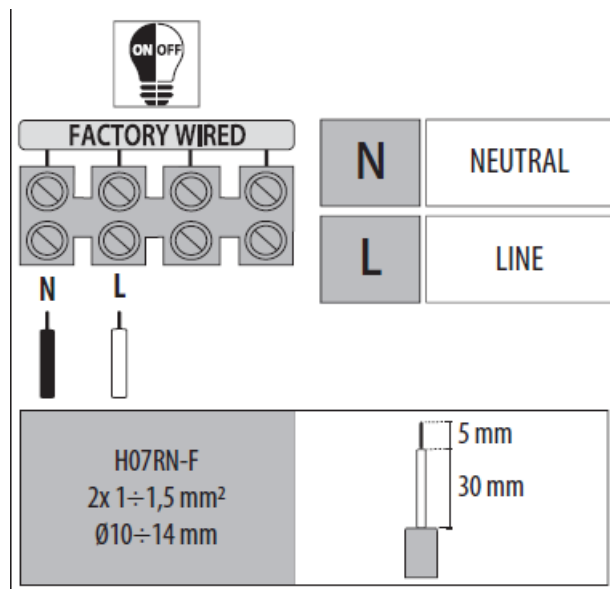


## 5B DALI WIRING

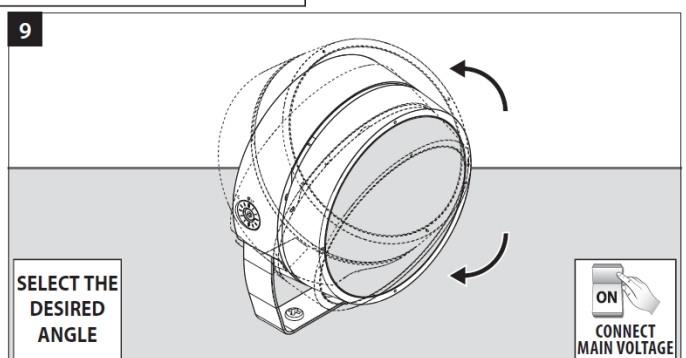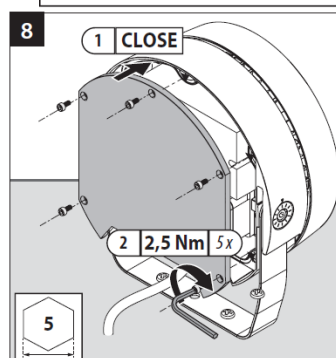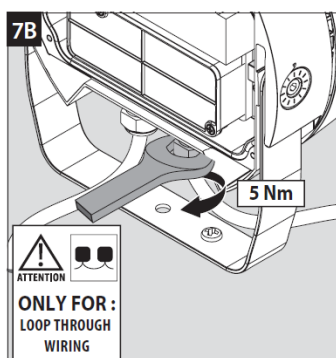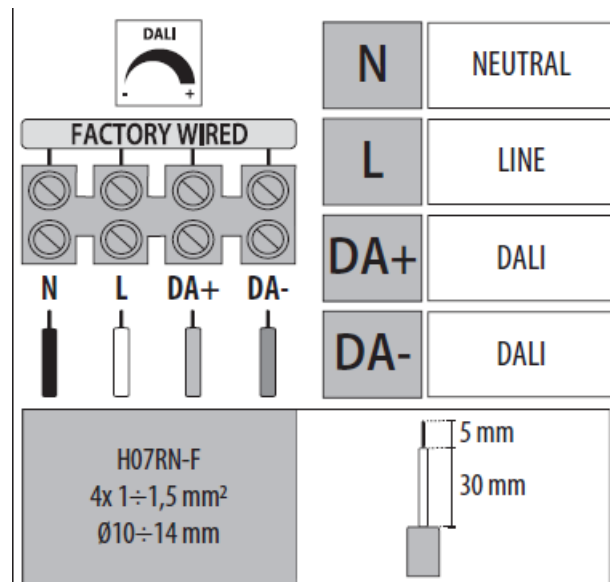


**INSTALLATION INSTRUCTIONS:** The luminaire is suitable for outdoor and indoor installation. – The luminaire is suitable for installation on usually flammable surfaces. – Always verify that the structure is suitable to fix the luminaire.

**ELECTRICAL CONNECTION:** – Check the local voltage is same as indicated on the product label. For the electrical connection please respect the mark on the luminaire.


To determine the number of luminaires and the maximum length of the installation consult the table shown.

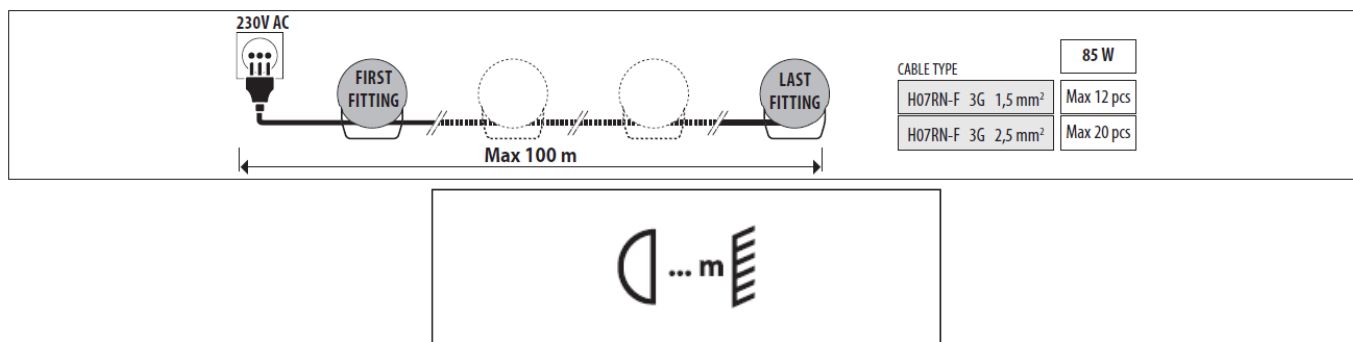


- The minimum distance between floodlight and illuminated surface.

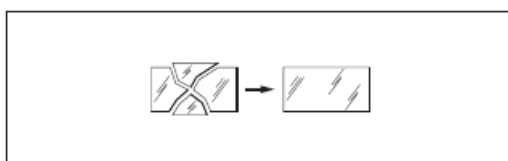

- Replace any damaged glass/diffusers or other damaged parts. Request the manufacturer to provide a spare part.

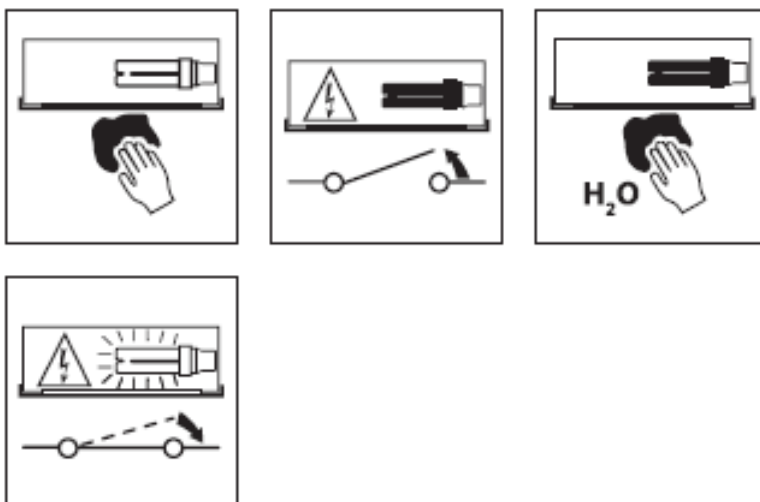

- Regularly clean the glass/diffuser diffuser of the spotlight with a soft cloth. – Do not use chemicals for cleaning the glass/diffuser diffuser of the luminaire.

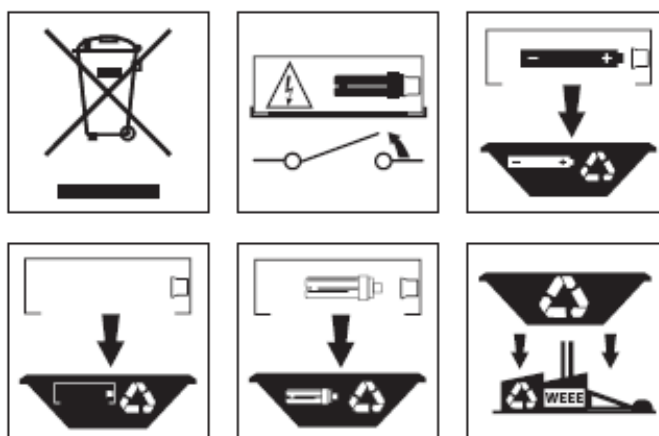

- In respect and compliance to environmental standards at the end of life do not dispose of as standard waste, this must be taken to one of the authorized collection points.

PERFORMANCE IN LIGHTING S.p.A. Viale del Lavoro 9/11 – 37030 Colognola ai Colli (VR) Italia Tel: +39.045.61.59.211 – Fax: +39.045.61.59.292 [www.performanceinlighting.com](http://www.performanceinlighting.com)



**[PERFORMANCE in LIGHTING TYK+ 30 LED Floodlight](#)** [pdf] Instructions  
TYK 30, LED Floodlight, TYK 30 LED Floodlight

## References

- [prohibited.DE](#)
- [This server is operated by UnoEuro Webhosting](#)
- [Api Market - zakupy spożywcze przez Internet! - Apimarket.pl - zakupy spożywcze przez Internet!](#)