

perixx PERIBOARD-326 Wired Mini Backlit USB Keyboard with Low Profile Keys Wired User Manual

Home » Perixx » perixx PERIBOARD-326 Wired Mini Backlit USB Keyboard with Low Profile Keys Wired User Manual

Contents

- 1 perixx PERIBOARD-326 Wired Mini Backlit USB Keyboard with Low Profile Keys Wired
- **2 INSTALLATION**
- 3 Specification
- **4 Important Safety Instructions**
- 5 Documents / Resources
- **6 Related Posts**



perixx PERIBOARD-326 Wired Mini Backlit USB Keyboard with Low Profile Keys Wired




Caution

- The manufacturer and re-resellers are not responsible for any technical malfuncons, damage, or personal injury incurred by:
- Any attempt to dismantle, change or modify the product in any manner
 - Malfun con or damage due to misuse or improper Altera on or repair.
 - Malfun con or damage caused by external influence such as falling
 - Malfun con or damage is caused by a fire, salt, gas, earthquake, lightning, wind, water, or other natural calamies, or abnormal voltage.
 - Malfun con or damage is caused by other devices connected to the products.
 - Malfun con or damage is caused by high temperature, humid, greasy, dusty, and hazardous environment.
- You are cautioned that changes or modificaons not expressly approved by Perixx Computer GmbH could void your authority to operate the equipment.
- All brand names, trademarks, and logos are the properties of their respective owners.

Please Note: Long-term repave use of any keyboard and mouse could cause injury to the user. Perixx recommends users to avoid excessive use of this or any keyboard and mouse.

INSTALLATION

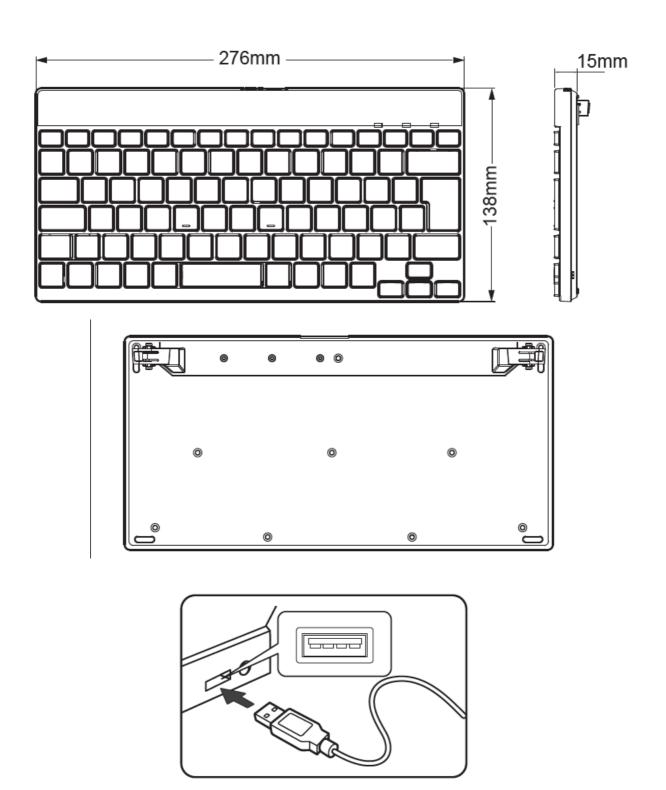


Specification

Interface	USB 2.0
Size	276*138*15mm
Cable Length	1500mm
Weight	380g
Material	ABS
OS requirement	Win 7 / above
Key number	80
Key Type	Membrane
Actua on distance	1.3±0.2mm
Total travel distance	2.2±0.2mm
Durability	10 million keypresses

Important Safety Instructions

- · Avoid Dropping.
- · Do not disassemble.
- · Do no expose to liquids.
- This product is suitable for moderate climates only.
- The maximum ambient temperature during use of this product must not exceed 40 degree
- Open flame sources, such as candles, must not be placed on this product.
- Only use a dry cloth or brush to clean this product.

Documents / Resources

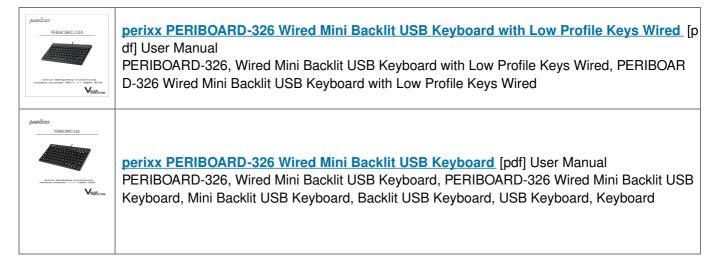

Manuals+,