



Petridis Lighting CL 260Circlight CI Squarelight Sql Owner's Manual

[Home](#) » [PETRIDIS Lighting](#) » Petridis Lighting CL 260Circlight CI Squarelight Sql Owner's Manual 

Contents

- [1 Petridis Lighting CL 260Circlight CI Squarelight SQL](#)
- [2 Technical Features](#)
- [3 CIRCLIGHT CL LED](#)
- [4 SQUARELIGHT SQL LED](#)
- [5 Documents / Resources](#)
 - [5.1 References](#)



Petridis Lighting CL 260Circlight CI Squarelight SQL



Product Specifications

- **Polycarbonate** body in white color
- **Methacrylate** cover in white color
- **Metal steel** base for the installation of the LED module and the electrical connection
- **Anti-aging** sealing gasket
- **Connection for operation on 230V-50/60Hz**

For LED Version

- **Last generation** highly efficient LED CHIP
- **Pure light without** IR/UV radiation
- **Operation life:** 50,000 hours with efficiency > 70% of the initial luminous flux (L70B50)

Warranty Information

- **CRI:** minimum 80
- **Dimmer phase cut** (for specific models)

Luminous Efficacy

- **12W:**
 - **126 LM/W at 4000K / SDCM: 3**
 - **120 LM/W at 3000K / SDCM: 3**
- **22W:**
 - **116 LM/W at 4000K / SDCM: 4**
 - **105 LM/W at 3000K / SDCM: 4**

Product Codes and Descriptions

Code	Description	Dimensions
562833	CL 260 LED 12W IP54 Warm	D(mm): 260, H(mm): 55
562843	CL 260 LED 12W IP54 Neutral	D(mm): 260, H(mm): 55
562813	CL 360 LED 22W IP65 Warm	D(mm): 360, H(mm): 83
562823	CL 360 LED 22W IP65 Neutral	D(mm): 360, H(mm): 83


Technical Features

- Polycarbonate body in white color.
- Methacrylate cover in white color.
- Metal steel base for the installation of the led module and the electrical connection.
- Anti-aging sealing gasket.
- Connection for operation on 230V-50/60Hz.

For LED Version:

- Last generation highly efficient LED CHIP.
- Pure light without IR/UV radiation.
- **Operation life:** 50,000 hours with efficiency > 70% of the initial luminous flux (L70B50).


CIRCLIGHT CL LED

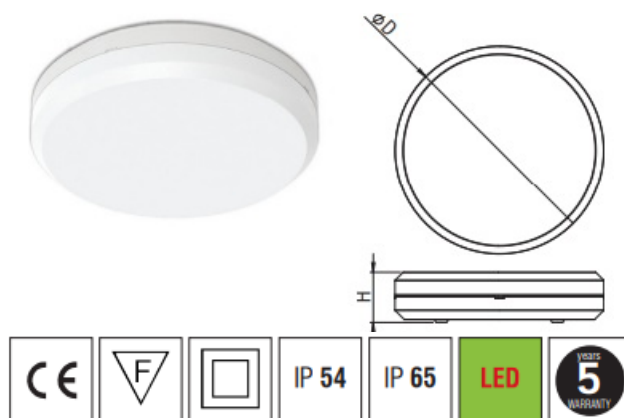

- **CRI:** min. 80
- **Dimmer** phase cut (for CL 260)
- **Luminous Efficacy:**
- **12W: 126 LM/W at 4000K / SDCM: 3**
- **12W: 120 LM/W at 3000K / SDCM: 3**
- **22W: 116 LM/W at 4000K / SDCM: 4**
- **22W: 105 LM/W at 3000K / SDCM: 4**

Code	Description	Dimensions	
		D(mm)	H(mm)
562833	CL 260 LED 12W IP54 Warm	Ø260	55
562843	CL 260 LED 12W IP54 Neutral	Ø260	55
562813	CL 360 LED 22W IP65 Warm	Ø360	83
562823	CL 360 LED 22W IP65 Neutral	Ø360	83

SQUARELIGHT SQL LED

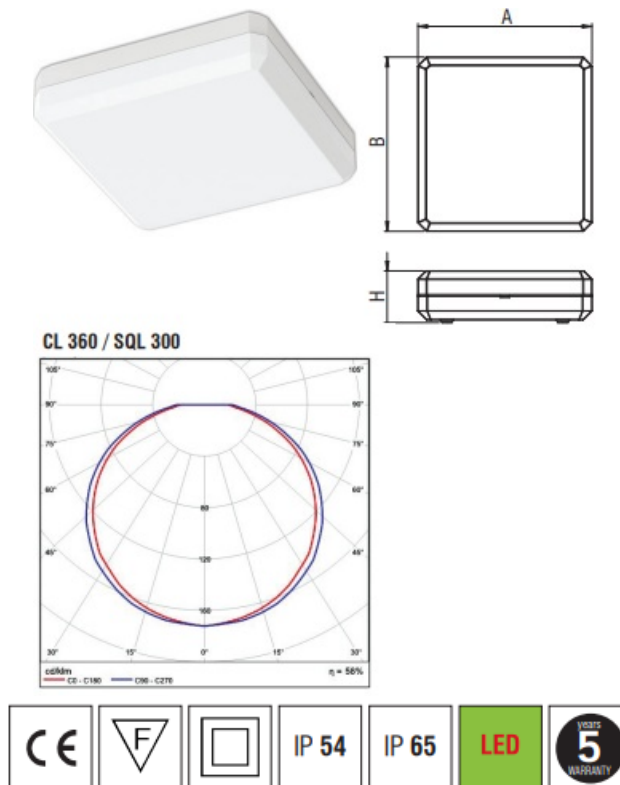

- **CRI:** min. 80
- **Dimmer phase cut** (for SQL 200)
- **Luminous Efficacy:**
- **12W:** 126 LM/W at 4000K / **SDCM:** 3
- **12W:** 120 LM/W at 3000K / **SDCM:** 3
- **22W:** 116 LM/W at 4000K / **SDCM:** 4
- **22W:** 105 LM/W at 3000K / **SDCM:** 4

Code	Description	Dimensions		
		A(mm)	B(mm)	H(mm)
572843	SQL 200 LED 12W IP54 Warm	200	200	58
572853	SQL 200 LED 12W IP54 Neutral	200	200	58
572823	SQL 300 LED 22W IP65 Warm	300	300	83
572833	SQL 300 LED 22W IP65 Neutral	300	300	83

- www.petridis-lighting.gr

Documents / Resources



[Petridis Lighting CL 260Circlight CI Squarelight Sql](#) [pdf] Owner's Manual
CL260 Circlight CI Square light Sql, CL260, Circlight CI Square light Sql, Circlight CI Square ligh
t Sql, Square light Sql, light Sql, Sql

References

- [Επαγγελματικός & Αρχιτεκτονικός Φωτισμός LED | Petridis](#)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.