



PHANTEKS PH-GB3090TiGBBP Innovative Computer Hardware Design Installation Guide

[Home](#) » [PHANTEKS](#) » PHANTEKS PH-GB3090TiGBBP Innovative Computer Hardware Design Installation Guide



PHANTEKS

PH-GB3090TiGBBP Innovative Computer Hardware Design
Installation Guide



GLACIER G3090Ti GIGABYTE BACKPLATE

PH-GB3090TIGBBP_BK01 /CR01

INSTALLATION GUIDE V1.0

Contents

[1 PACKAGE CONTENTS](#)

[2 STEP 4. APPLYING THERMAL PADS](#)

[3 STEP 5. INSTALL THE GLACIER BACKPLATE](#)




[4 STEP 6. CONNECT D-RGB LIGHTING](#)

[5 STEP 7. INSTALLING FITTINGS](#)

[6 Documents / Resources](#)

[7 Related Posts](#)

PACKAGE CONTENTS

	GLACIER BACKPLATE QTY: 1		M2.5x8 Flush Screws QTY: 8		Thermal Pads QTY: 2
---	------------------------------------	---	--------------------------------------	---	-------------------------------



This product requires the PH-GB3090TIGB GPU water block. Please follow step 1 to 3 of the GPU water block's installation guide before proceeding.




WARNING – This product is intended for advanced users. Improper installation may result in damage to your equipment. While all efforts have been made to provide the most comprehensive information possible, Phanteks assumes no liability expressed or implied for any damage(s) occurring to your components as a result of using Phanteks cooling products, either due to mistake or omission on our part in the below instructions or due to failure or defect in the Phanteks cooling products. Do not disassemble the water block. The warranty will be voided.

Turn off the power to your system and discharge your body's static electric charge before proceeding with the installation procedure. If you do not feel comfortable with performing the installation procedure, consult a qualified computer technician.

FINISH STEPS 1 TO 3 FROM THE WATER BLOCK INSTALLATION GUIDE BEFORE PROCEEDING:

STEP 4. APPLYING THERMAL PADS


Remove the protective film and place the thermal pads on the correct position on the backplate.

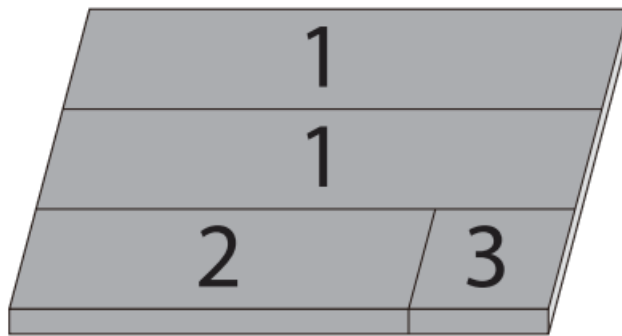

Make sure to remove the protective film on both sides of the thermal pads. ,




If the No.4 thermal pad is too long, please cut it out to a suitable length.

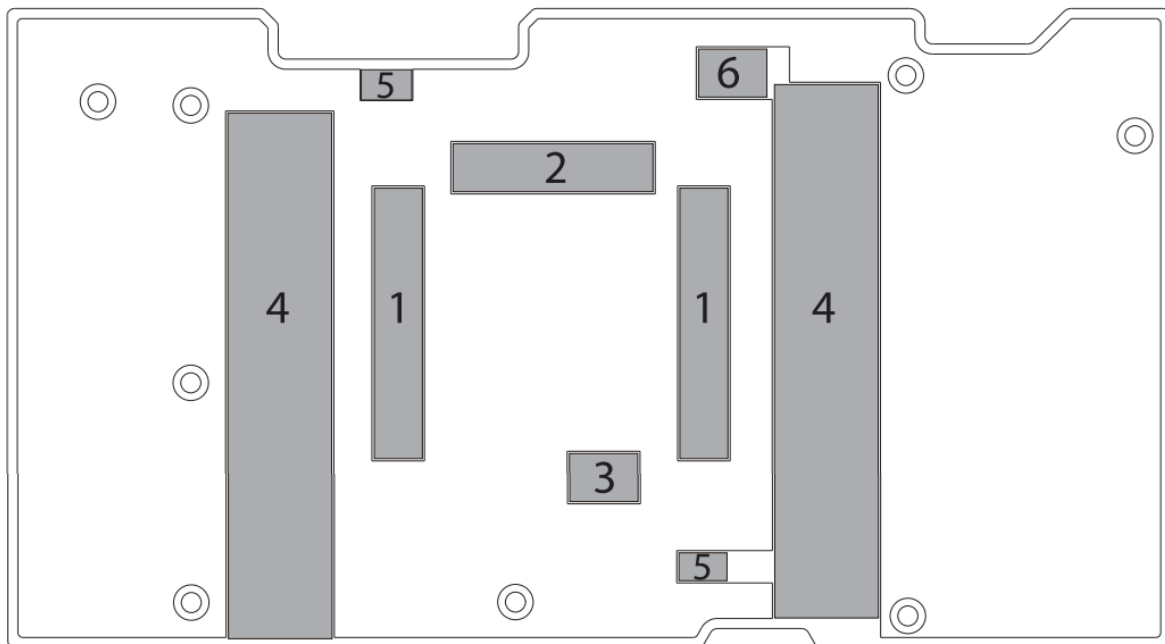

STEP 5. INSTALL THE GLACIER BACKPLATE

Carefully position the backplate onto the graphics card. Align the mounting holes on the PCB with the holes on the backplate.

Secure the backplate with 8 M2.5x8mm flush screws to the PCB.

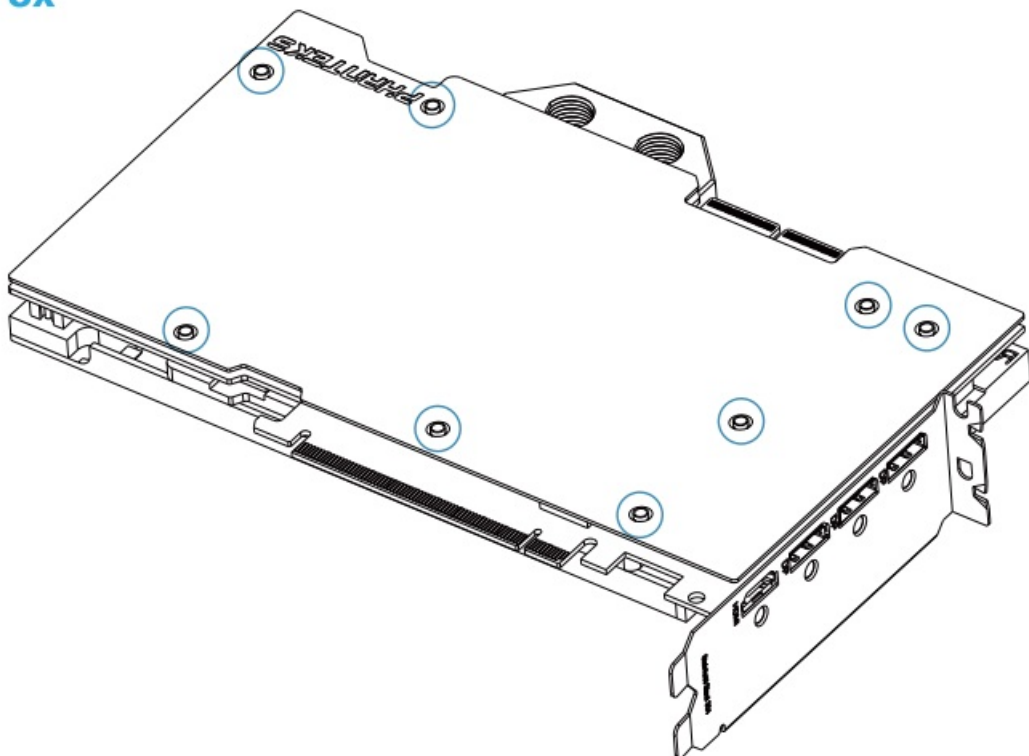


STEP 6. CONNECT D-RGB LIGHTING

Connect the D-RGB cable to the D-RGB strip in the water block.




All Phanteks D-RGB products can be daisy-chained together.

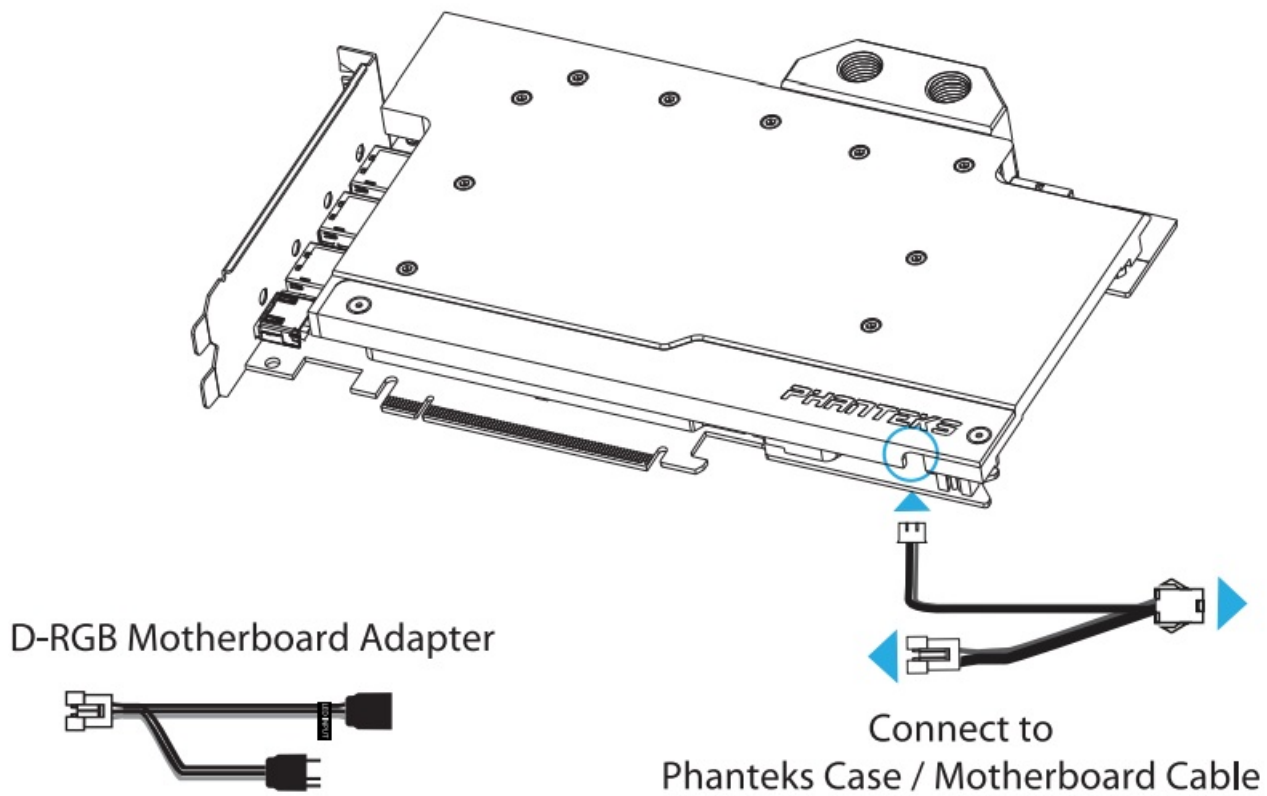

You can connect the D-RGB cable to a compatible motherboard with the D-RGB Motherboard Adapter.

STEP 7. INSTALLING FITTINGS

Install G1/4 threaded male fittings and close the remaining ports with the two included Stop Fittings.

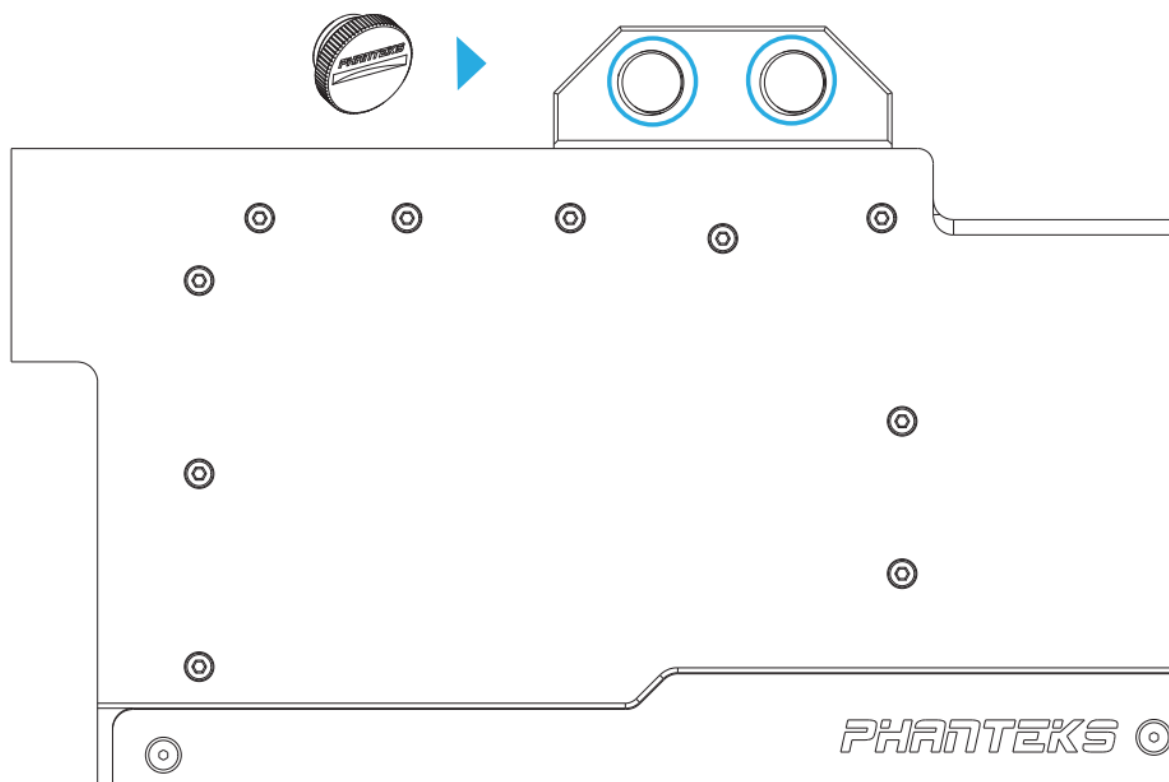




Always perform a leak test before providing power to any system components.

PHANTEKS

Documents / Resources



[PHANTEKS PH-GB3090TiGBBP Innovative Computer Hardware Design](#) [pdf] Installation Guide

PH-GB3090TiGBBP, Innovative Computer Hardware Design, Computer Hardware Design, Hardware Design, PH-GB3090TiGBBP, Innovative Computer

Manuals+