




[Home](#) » [PHOENIX CONTACT](#) » **PHOENIX CONTACT IB IL AI 4-EF-PAC Inline Analog Input Terminal Owner's Manual** 

Contents [[hide](#)]

- [1 PHOENIX CONTACT IB IL AI 4-EF-PAC Inline Analog Input Terminal](#)
- [2 Product description](#)
- [3 Advantages](#)
- [4 Commercial data](#)
- [5 Technical data](#)
- [6 Connection data](#)
- [7 Drawings](#)
- [8 Approvals](#)
- [9 Classifications](#)
- [10 Contact](#)
- [11 FAQ](#)
- [12 Documents / Resources](#)
 - [12.1 References](#)



PHOENIX CONTACT IB IL AI 4-EF-PAC Inline Analog Input Terminal

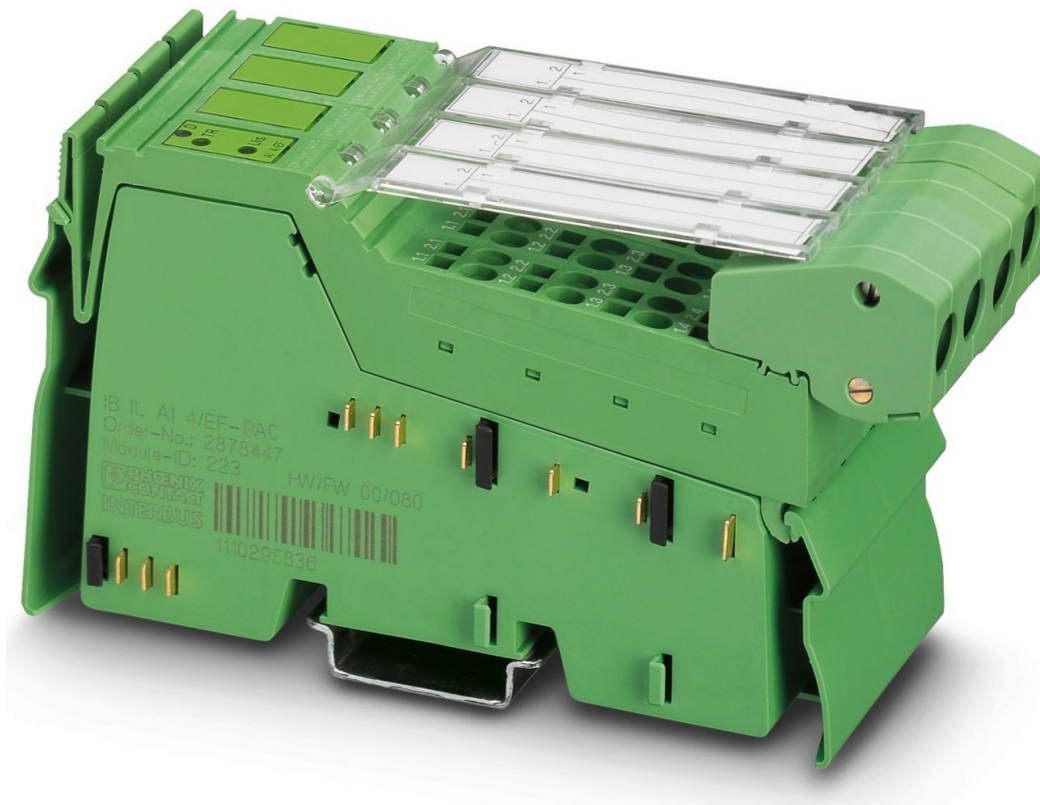

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

Inline, Analog input terminal, Analog inputs: 4, 0 V ... 5 V, -5 V ... 5 V, 0 V ... 10 V, -10 V ... 10 V, 0 mA ... 20 mA, 4 mA ... 20 mA, -20 mA ... 20 mA, connection technology: 2-, 3-, 4-conductor, transmission speed in the local bus: 500 kbps, degree of protection: IP20, including Inline connectors and marking fields

Product description

The terminal is designed for use within an Inline station. It is used to acquire analog voltage and current signals.

Advantages

Your advantages

- 4 differential signal inputs
- Connection of sensors in 2-, 3-, and 4-conductor technology
- Current ranges: 0 mA ... 20 mA, 4 mA ... 20 mA, ± 20 mA


- Voltage ranges: 0 V ... 10 V, ± 10 V, 0 V ... 5 V, ± 5 V
- The channels are parameterized independently of one another via the bus system
- Parameterization via process data or PCP
- Measured values can be represented in four different formats
- Resolution depends on the representation format and the measuring range
- Process data update of all channels in max. 1 ms
- Sensor supply with channel-specific integrated short-circuit and overload protection
- Bus-synchronous provision of input values with very low jitter ($< 10 \mu\text{s}$)

Commercial data

- Item number 2878447
- Packing unit 1 pc
- Minimum order quantity 1 pc
- Sales key DR01
- Product key DRI141
- Catalog page Page 136 (C-6-2019)
- GTIN 4017918996376
- Weight per piece (including packing) 252 g
- Weight per piece (excluding packing) 210 g
- Customs tariff number 85389091
- Country of origin DE

Technical data

Dimensions

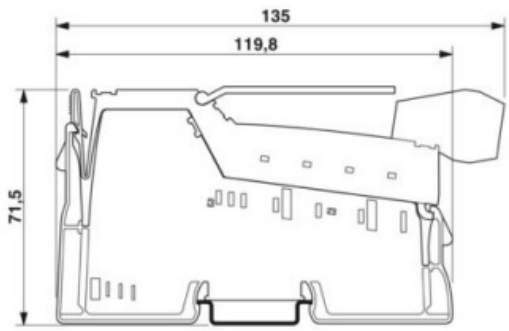Dimensional drawing	
Width	48.8 mm

Height	135 mm
Depth	71.5 mm
Note on dimensions	Housing dimensions

Notes

Note on application

Note on application Only for industrial use

Utilization restriction

CCCex note Use in potentially explosive areas is not permitted in China.

Interfaces

Inline local bus

- Number of interfaces 2
- Connection method Inline data jumper
- Transmission speed 500 kbps

System properties

Module

ID code (dec.)	223
ID code (hex)	DF
Length code (hex)	05
Length code (dec)	05
Process data channel	80 bit
Input address area	10 Byte

Output address area	10 Byte
Register length	96 bit
Required parameter data	28 Byte
Required configuration data	4 Byte

Input data

Analog: General

Input name	Analog inputs
Description of the input	Differential input, including sensor supply (24 V DC)
Number of inputs	4
A/D conversion time	max. 10 µs
A/D converter resolution	16 bit
Connection method	Inline shield connector
Connection technology	2-, 3-, 4-conductor
Note regarding the connection technology	shielded
Current input signal	0 mA ... 20 mA
	4 mA ... 20 mA
	-20 mA ... 20 mA
Input resistance current input	typ. 110 Ω
Voltage input signal	0 V ... 5 V
	-5 V ... 5 V

	0 V ... 10 V
	-10 V ... 10 V
Input resistance of voltage input	typ. 300 kΩ
Data formats	IB IL, IB ST, standardized representation, S7 compatible
Limit frequency (3 dB)	500 Hz
Measured value resolution	16 bits (15 bits + sign bit)
Protective circuit	Transient protection; Yes, via arresters
	Overload protection of the current inputs; electronic

Product properties

Product type	I/O component
Product family	Inline
Type	modular
Scope of delivery	including Inline connectors and marking fields
Operating mode	Process data mode with 5 words/1 word PCP
Diagnostics messages	Failure of the internal I/O supply I/O error message sent to the bus coupler
	Failure of or insufficient communications power UL I/O error message sent to the bus coupler

	I/O error Error message in the process data
	User error Error message in the process data

Insulation characteristics

Overvoltage category	II (IEC 60664-1, EN 60664-1)
Pollution degree	2 (IEC 60664-1, EN 60664-1)

Electrical properties

Maximum power dissipation for nominal condition	1.4 W
---	-------

Potentials: Communications power (UL)

Supply voltage	7.5 V DC (via voltage jumper)
Current draw	max. 100 mA

	typ. 85 mA
--	------------

Potentials: Supply of analog modules (UANA)

Supply voltage	24 V DC (via voltage jumper)
Supply voltage range	19.2 V DC ... 30 V DC (including all tolerances, including ripple)
Current draw	max. 20 mA

	typ. 13 mA
--	------------

Potentials: Main circuit supply (UM)

Supply voltage	24 V DC (via voltage jumper)
Supply voltage range	19.2 V DC ... 30 V DC (including all tolerances, including ripple)
Current draw	max. 200 mA
	min. 0 mA (No-load)

Supply:

Designation	Sensor supply UiS
Supply voltage	24 V DC (via feed-in from UM)
Current consumption	max. 50 mA (per channel)

Electrical isolation/isolation of the voltage ranges

Test voltage: 7.5 V supply (bus logic), 24 V supply UANA / I/O	500 V AC, 50 Hz, 1 min
Test voltage: 7.5 V supply (bus logic), 24 V supply UANA / functional ground	500 V AC, 50 Hz, 1 min
Test voltage: I/O/functional ground	500 V AC, 50 Hz, 1 min

Connection data

Connection technology

Connection name	Inline connector
-----------------	------------------

Conductor connection

Connection method	Spring-cage connection
Conductor cross section rigid	0.08 mm ² 1.5 mm ²
Conductor cross section flexible	0.08 mm ² 1.5 mm ²
Conductor cross section AWG	28 ... 16
Stripping length	8 mm

Inline connector

Connection method	Spring-cage connection
Conductor cross section, rigid	0.08 mm ² 1.5 mm ²
Conductor cross section, flexible	0.08 mm ² 1.5 mm ²
Conductor cross section AWG	28 ... 16
Stripping length	8 mm

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-25 °C ... 55 °C
---------------------------------	------------------

Degree of protection	IP20
Air pressure (operation)	70 kPa ... 106 kPa (up to 3000 m above sea level)

Air pressure (storage/transport)	70 kPa ... 106 kPa (up to 3000 m above sea level)
Ambient temperature (storage/transport)	-25 °C ... 85 °C
Permissible humidity (operation)	10 % ... 95 % (non-condensing)
Permissible humidity (storage/transport)	10 % ... 95 % (non-condensing)

Standards and regulations


Protection class	III (IEC 61140, EN 61140, VDE 0140-1)
------------------	---------------------------------------

Mounting

Mounting type	DIN rail mounting
---------------	-------------------


Drawings

Dimensional drawing

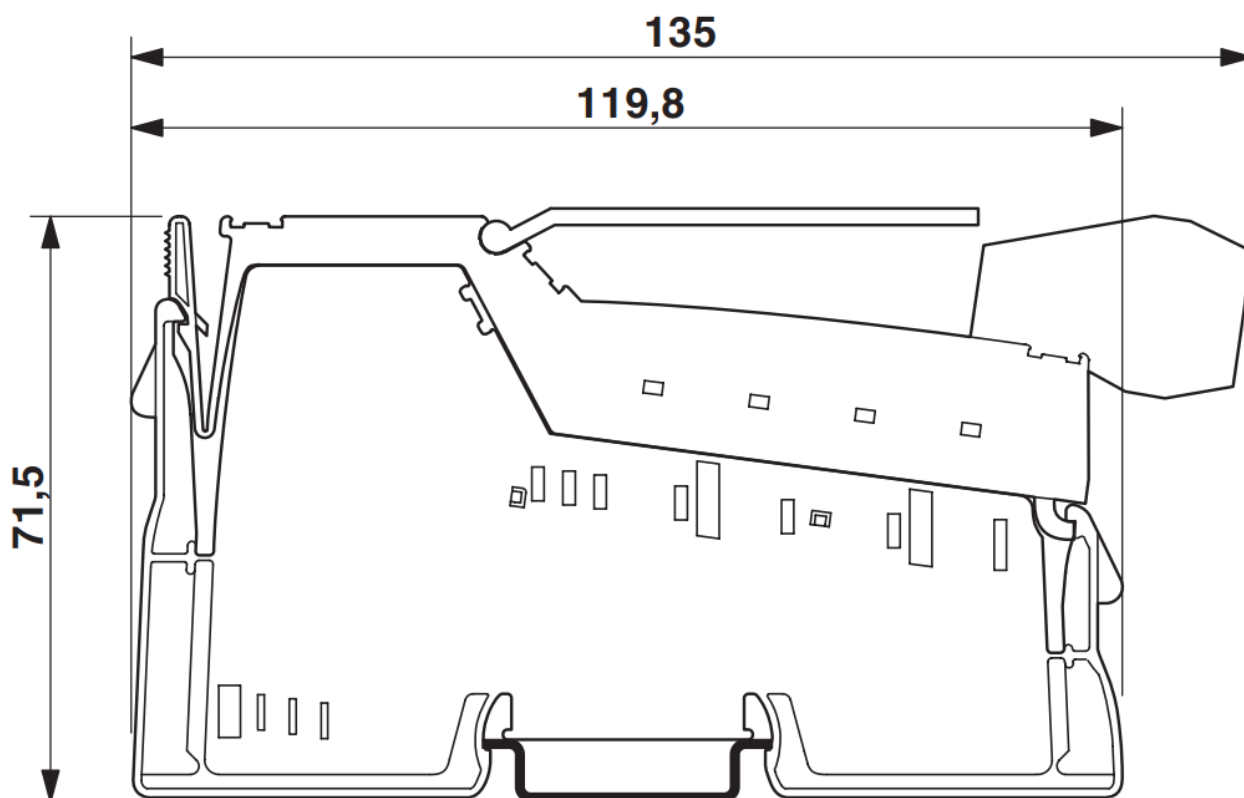

Dimensions (in mm)

Connection diagram

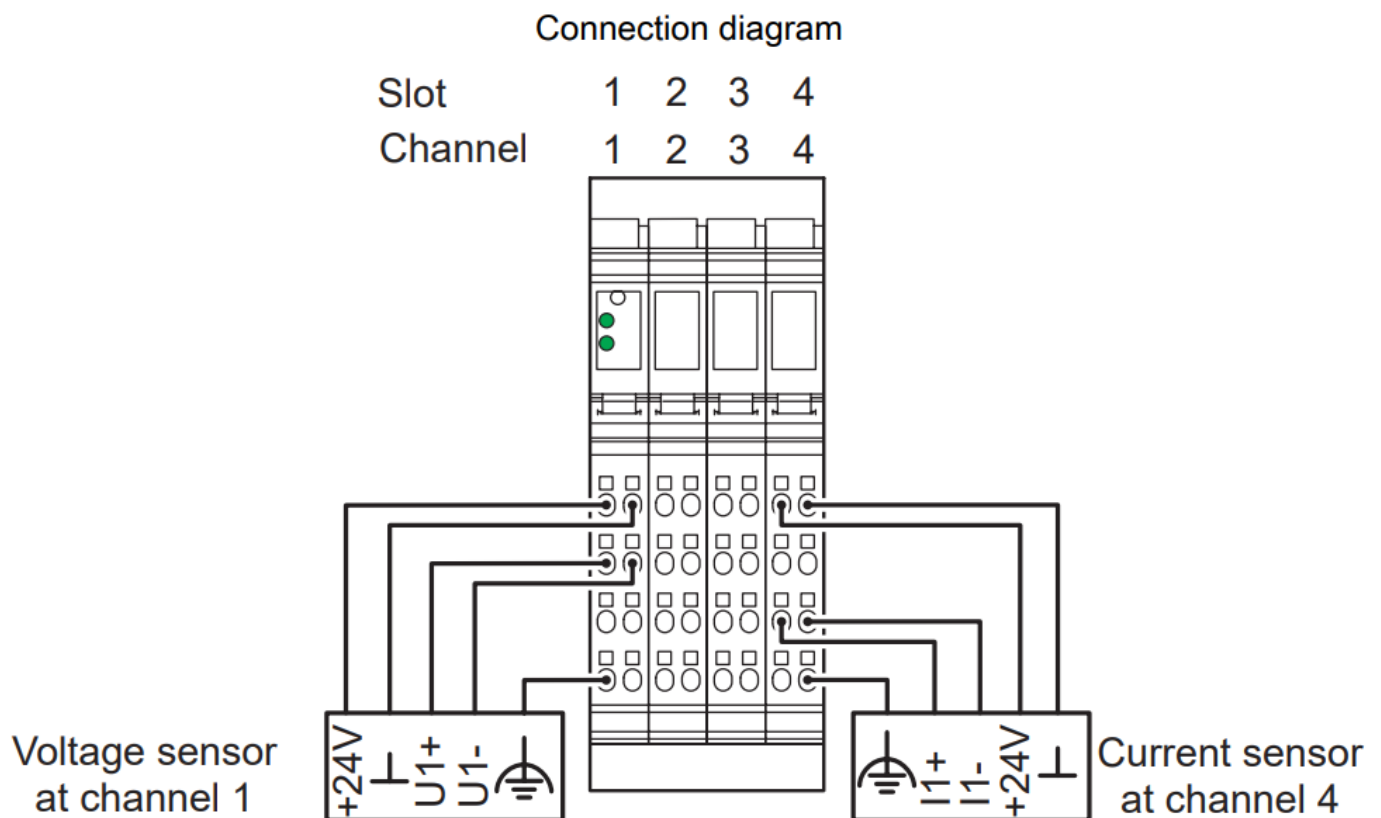

Approvals

To download certificates, visit the product detail page:

<https://www.phoenixcontact.com/us/products/2878447>



DNV GL

Approval ID: TAA00000BN



LR

Approval ID: LR23398855TA



BV

Approval ID: 20989/B2_BV

BSH

Approval ID: 658a



RINA

Approval ID: ELE121121XG

ABS

Approval ID: 22-2226444-PDA



cULus Recognized

Approval ID: E140324



cULus Listed

Approval ID: E199827

Classifications

ECLASS

ECLASS-13.0

27242601

ETIM

ETIM 9.0

EC001596

UNSPSC

UNSPSC 21.0

32151600

Environmental product compliance

EU RoHS

- Fulfills EU RoHS substance requirements Yes
- Exemption 7(a), 7(c)-I

China RoHS

- Environment friendly use period (EFUP) EFUP-E
- No hazardous substances above the limits

EU REACH SVHC

- REACH candidate substance (CAS No.) Lead(CAS: 7439-92-1)
- SCIP 65d3ee3f-eeca-4650-b44c-1b47cf964fe2

Contact

- Phoenix Contact 2025 © – all rights reserved
- <https://www.phoenixcontact.com>
- Phoenix Contact USA
- 586 Fulling Mill Road
- Middletown, PA 17057, United States
- (+717) 944-1300
- info@phoenixcon.com

Downloaded from [Arrow.com](https://www.phoenixcontact.com)

- <https://www.phoenixcontact.com/us/products/2878447>

FAQ

- **Q: Can this module be used in potentially explosive areas?**
 - A: No, the use of this module in potentially explosive areas is not permitted in China.
- **Q: What is the voltage range for the current input signal?**
 - A: The voltage range for the current input signal is specified as 0 V to 5 V.

Documents / Resources



[PHOENIX CONTACT IB IL AI 4-EF-PAC Inline Analog Input Terminal \[pdf\]](#)
Owner's Manual
IB IL AI 4-EF-PAC Inline Analog Input Terminal, IB IL AI 4-EF-PAC, Inline Analog Input Terminal, Analog Input Terminal, Input Terminal

References

- [User Manual](#)

PHOENIX
CONTACT

Analog Input Terminal, IB IL AI 4-EF-PAC, IB IL AI 4-EF-PAC Inline Analog Input Terminal, Inline Analog Input Terminal, Input Terminal, PHOENIX CONTACT

Leave a comment

Your email address will not be published. Required fields are marked *

Comment *

Name

Email

Website

☐ Save my name, email, and website in this browser for the next time I comment.

[Post Comment](#)

Search:

[Search](#)

[Manuals+](#) | [Upload](#) | [Deep Search](#) | [Privacy Policy](#) | [@manuals.plus](#) | [YouTube](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.