



Contents [[hide](#)]

- [1 Planet Technology IGS-5227-6T,IGS-5227-6MT-X Managed Ethernet Switch](#)
- [2 Package Contents](#)
- [3 Making Waterproof RJ45 Cable \(IGS-5227-6T\)](#)
- [4 Connecting Waterproof Cable to the IGS-5227-6T](#)
- [5 M12 X-coded Connector Pin Assignment](#)
- [6 Connecting M12 Cable to the IGS-5227-6MT-X](#)
- [7 M12 DC Power Cable Pin Assignment](#)
- [8 Requirements](#)
- [9 Starting Web Management](#)
- [10 Saving Configuration via Web](#)
- [11 Recovering Back to Default Configuration](#)
- [12 Customer Support](#)
- [13 FAQ](#)
- [14 Documents / Resources](#)
 - [14.1 References](#)

Planet

Planet Technology IGS-5227-6T,IGS-5227-6MT-X Managed Ethernet Switch



Package Contents

Thank you for purchasing PLANET Industrial L2+ Managed Ethernet Switch. The descriptions of this series are shown below:

IGS-5227-6T	Industrial IP67-rated 6-Port 10/100/1000T Managed Ethernet Switch (-40~75 degrees C)
IGS-5227-6MT-X	Industrial IP67-rated 6-Port 10/100/1000T M12 Managed Ethernet Switch (-40~75 degrees C, X-coded M12)

“Industrial Managed Switch” is used as an alternative name in this Quick Installation Guide.

Open the box of the Industrial Managed Switch and carefully unpack it. The box should contain the following items:

	IGS-5227-6T	IGS-5227-6MT-X
The Industrial Managed Switch	■	■
Quick Installation Guide	■	■
1.2m M12 Power Cable	■	■
Waterproof RJ45 Connector	6	–
2m 8-pin X-coded M12-to-RJ45 UTP Cable	–	■
DIN-rail Kit	■	■
Wall-mount Kit	■	■

If any item is found missing or damaged, please contact your local reseller for replacement.

Making Waterproof RJ45 Cable (IGS-5227-6T)

Please read the following instructions and follow the procedures in the order being presented:


1. **Step 1:** Take a waterproof RJ45 jack out from the Industrial Managed Switch box and get hold of one RJ45 cable.




2. **Step 2:** Insert the RJ45 cable through the waterproof RJ45 jack.



3. **Step 3:** Prepare an RJ45 connector.

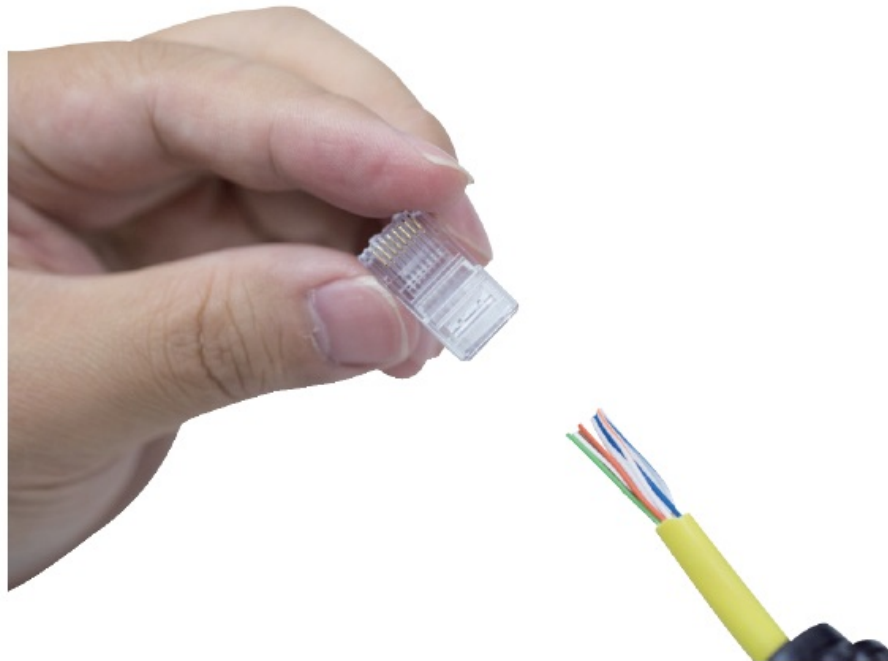


4. **Step 4:** Put the RJ45 connector in place with cable crimper.

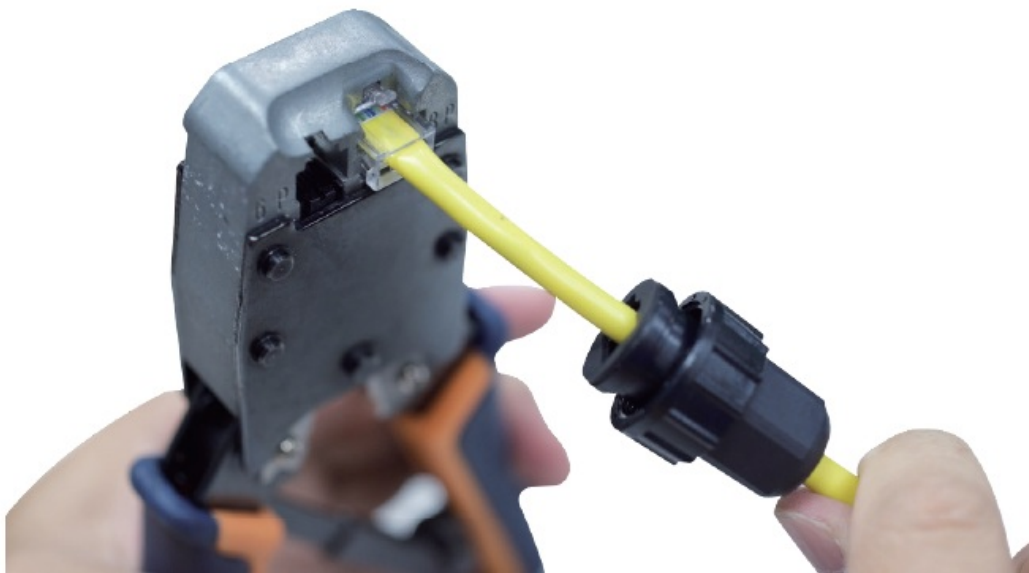

NOTE

The standard RJ45 receptacle/connector

There are 8 wires on a standard UTP/STP cable and each wire is color coded. The following shows the pin allocation and colors of straight-through cable connection:

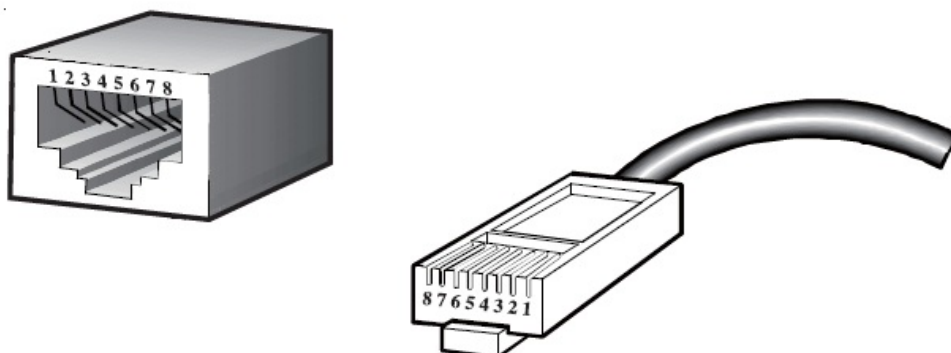

Straight Cable		<u>SIDE 1</u>	<u>SIDE 2</u>
	SIDE 1	1 = White/Orange	1 = White/Orange
		2 = Orange	2 = Orange
		3 = White/Green	3 = White/Green
		4 = Blue	4 = Blue
		5 = White/Blue	5 = White/Blue
	SIDE 2	6 = Green	6 = Green
		7 = White/Brown	7 = White/Brown
		8 = Brown	8 = Brown


Please make sure your waterproof RJ45 cables are with same pin assignment and colors as the above picture before deploying the cables into your network.

- Step 5:** To lock in the RJ45 connector, pull back the cable till the connector nicely fits into the waterproof connector hole.



NOTE

1. Use only the waterproof RJ45 connector provided in the package of the IGS-5227-6T.
2. If the waterproof RJ45 connector is found missing or damaged, please contact your local reseller where you purchased from. If the new waterproof RJ45 connector is obtained from PLANET, make sure its dimensions are the same.

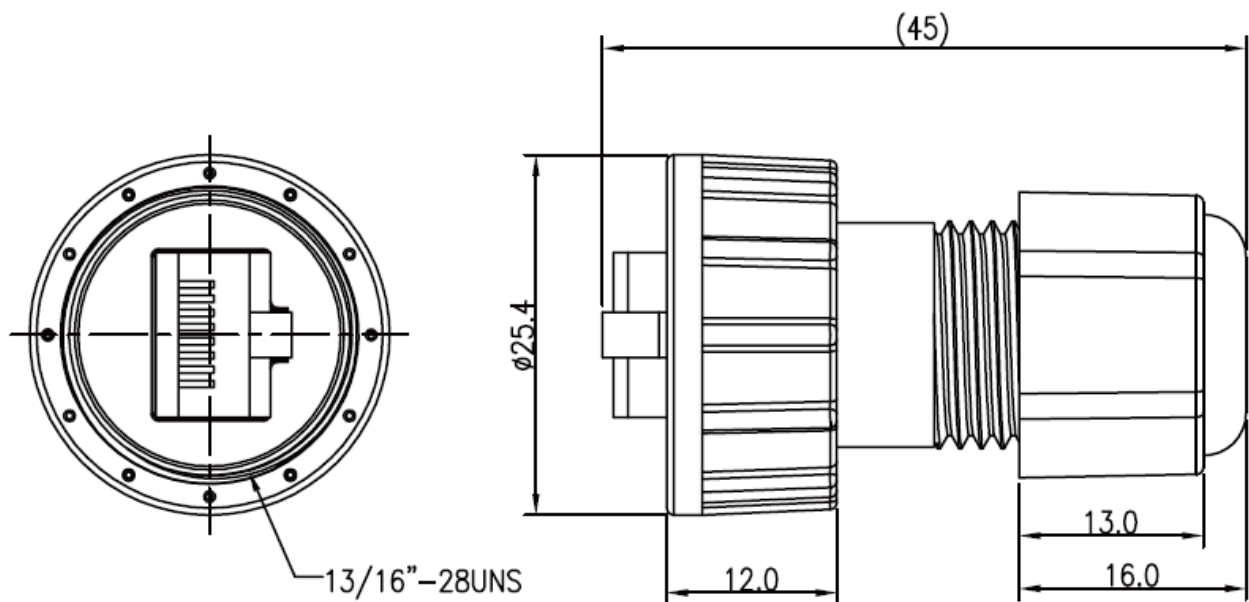

3. Never use any waterproof RJ45 connector that is not purchased from PLANET or doesn't have the same dimensions of the IGS-5227-6T; it will damage the device permanently.

Connecting Waterproof Cable to the IGS-5227-6T

NOTE

Follow all the connecting waterproof cable steps as shown in the example.

1. **Step 1:** Turn counterclockwise to remove the waterproof screw nuts of a RJ45 port and power **input**.



2. **Step 2:** Insert the waterproof RJ45 connector into the port of the Industrial Managed Switch.



3. **Step 3:** Turn clockwise to tighten the screw nut of the waterproof RJ45 connector.



4. **Step 4:** Insert the waterproof M12 power connector into the port of the power input.



5. **Step 5:** Turn clockwise to tighten the screw nut of the waterproof M12 power connector.



CAUTION


To have the waterproof effect, connectors must be totally tightened, otherwise, it would invalidate your warranty.

NOTE

Before connecting the DC power cord, please check whether your local DC power source is stable.


M12 X-coded Connector Pin Assignment

The IGS-5227-6MT-X front panel provides six 10/100/1000BASE-T Ethernet ports in the form of M12 8-pin X-coded female connector. These ports are designed for Ethernet equipment connection through Cat5/5e UTP cables. The M12 8-pin X-coded input interface pinout is shown below:

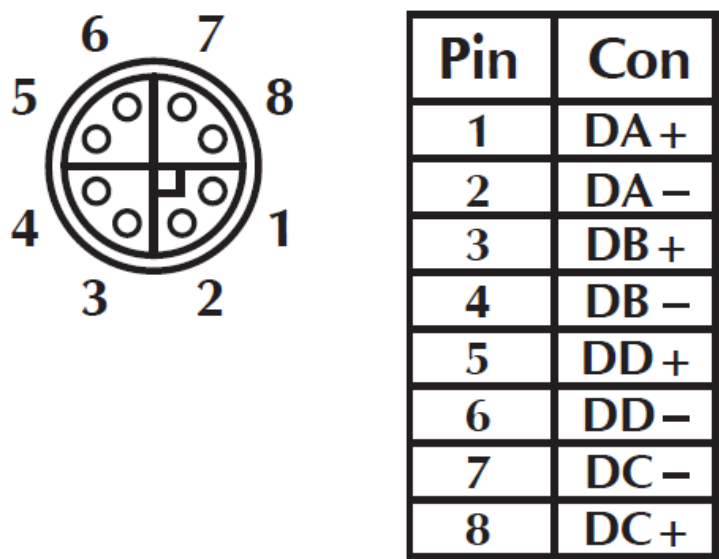

8-pin M12 X-coded Female 10/100/1000T Connector Pin Assignment

M12 (8-pin, X-coded Male) to RJ45 (8-pin) Straight-through UTP Cabling

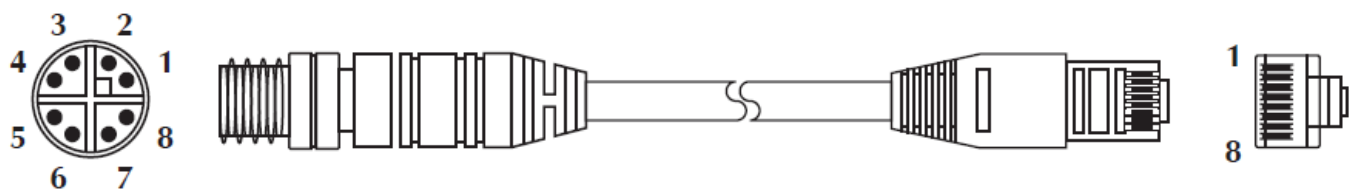

M12 X-coded Male Connector Pin No.	MDI 1000BASE-T Signal ID	T568B Color	RJ45 Connector Pin No.
1	BI_DA+	white/orange	1

2	BI_DA-	orange	2
3	BI_DB+	white/green	3
4	BI_DB-	green	6
5	BI_DD+	white/brown	7
6	BI_DD-	brown	8
7	BI_DC-	White/blue	5
8	BI_DC+	blue	4

NOTE

As each Ethernet port of the Industrial Managed Switch is running in auto negotiation mode, make sure the Ethernet ports of the corresponding Ethernet devices are also running in auto negotiation mode; otherwise, the Ethernet performance will be poor.

Connecting M12 Cable to the IGS-5227-6MT-X

NOTE

Follow all the connecting M12 cable to the IGS-5227-6MT-X steps as shown in the example.

- Step 1:** Turn counterclockwise to remove the waterproof screw nuts of an M12 connector and power input.



- Step 2:** Insert the M12 UTP male connector into the M12 female Gigabit Ethernet port of the Industrial Managed Switch.



3. **Step 3:** Turn clockwise to tighten the screw nut of the M12 connector and make sure the connection is tight.



4. **Step 4:** Insert the M12 power female connector into the M12 male port of the power input.



5. **Step 5:** Turn clockwise to tighten the screw nut of the M12 power connector.



CAUTION

To have the waterproof effect, connectors must be totally tightened, otherwise, it would invalidate your warranty.


NOTE

Before connecting the DC power cord, please check whether your local DC power source is stable.

M12 DC Power Cable Pin Assignment

The front panel of the Industrial Managed Switch provides one M12 DC power 5-pin male connector for DC power input. Please use the power cable with the M12 DC power 5-pin female connector from the Industrial Managed Switch package for DC power input. The M12 DC power cable pin assignment is shown below:



M12 DC power cable pin assignment and wiring code			
		V1 positive (+) pin = black cable	
		V1 negative (-) pin = brown cable	
		V2 positive (+) pin = blue cable	
		V2 negative (-) pin = white cable	

NOTE

Make sure you connect the correct power pin to your DC power source.

1. The wire gauge for the power cable should be in the range of 12 ~ 24 AWG.
2. The DC power input range is 9 ~ 48V DC.

There are two methods to install the Industrial Managed Switch – DIN-rail mounting and wall-mount plate mounting. For more detailed information, please refer to Chapter 2.3 of the user's manual.

Requirements

Workstations running Windows XP/2003/2008/Vista/7/8/10/11, MAC OS X or later, Linux, UNIX, or other platforms are compatible with TCP/IP protocols. Workstations are installed with Ethernet NIC (Network Interface Card)

Ethernet Port Connection

- Network cables — Use standard network (UTP) cables with RJ45 connectors.
- The above PC is installed with Web browser.

NOTE It is recommended to use Google Chrome or above to access the Industrial Managed Switch. If the Web interface of the Industrial Managed Switch is not accessible, please turn off the anti-virus software or firewall and then try it again.

Starting Web Management

The following shows how to start up the Web Management of the Industrial Managed Switch. Note the Industrial Managed Switch is configured through an Ethernet connection. Please make sure the manager PC must be set to the same IP subnet address. For example, the default IP address of the Industrial Managed Switch is 192.168.0.100, then the manager PC should be set to 192.168.0.x (where x is a number between 1 and 254, except 100), and the default subnet mask is 255.255.255.0.

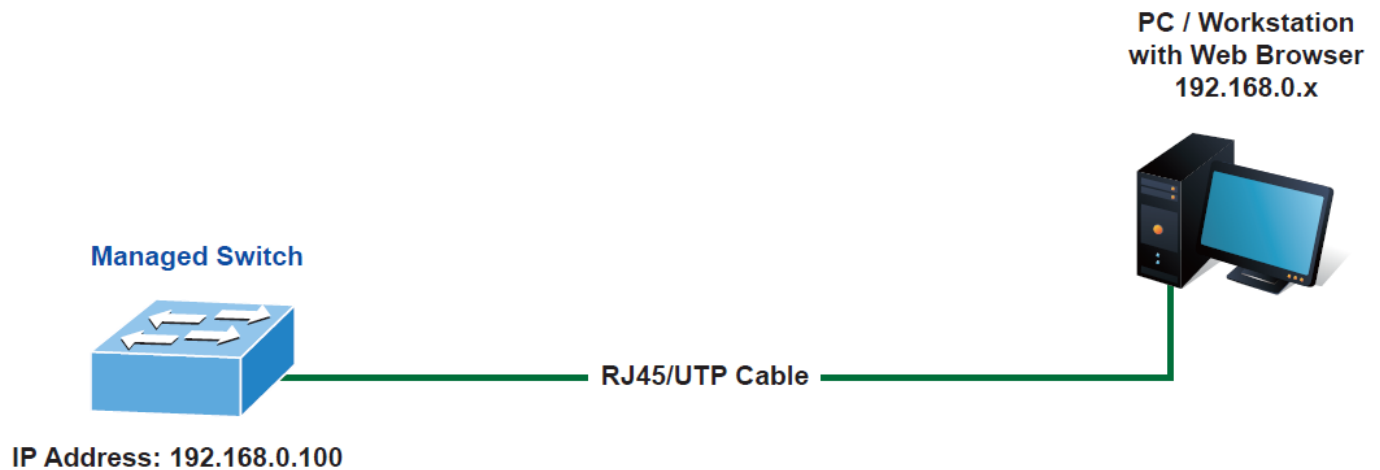


Figure 9-1: IP Management Diagram

Logging in to the Industrial Managed Switch

1. Use Google Chrome or above Web browser and enter IP address <http://192.168.0.100> (default IP address) to access the Web interface.

NOTE

The following console screen is based on the firmware version before May of 2025.

2. The following console screen is based on the firmware version before May of 2025. password “admin”. The login screen in Figure 9-2 appears.

Default Username: admin

Default Password: admin

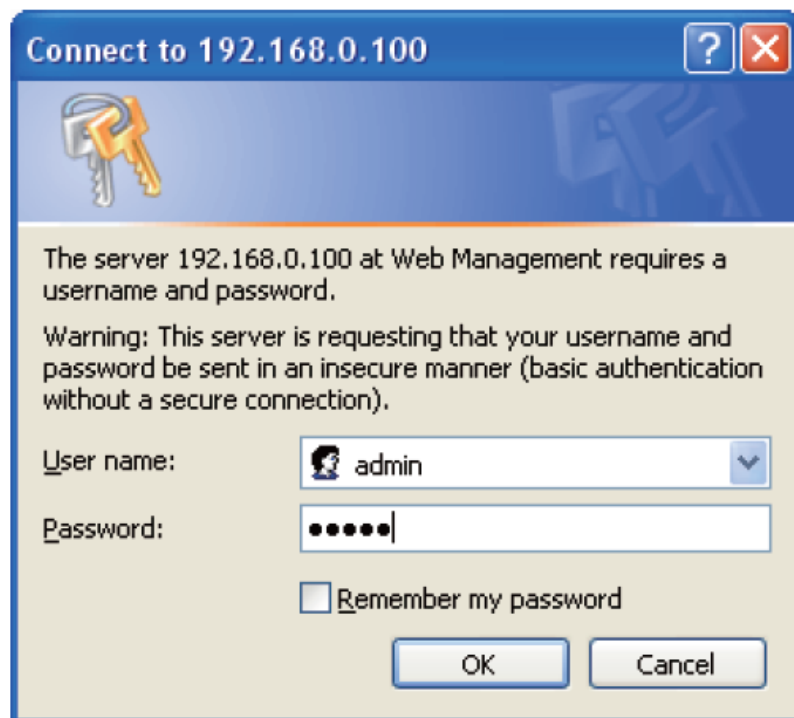


Figure 9-2: Login Screen

NOTE

The following web screen is based on the firmware version of May of 2025 or after.

3. When the following dialog box appears, please enter the default user name “admin” and the password. Refer to Section 9-3 to determine your initial login password.

Default IP Address: 192.168.0.100

Default User Name: admin

Default Password: sw + the last 6 characters of the MAC ID in lowercase

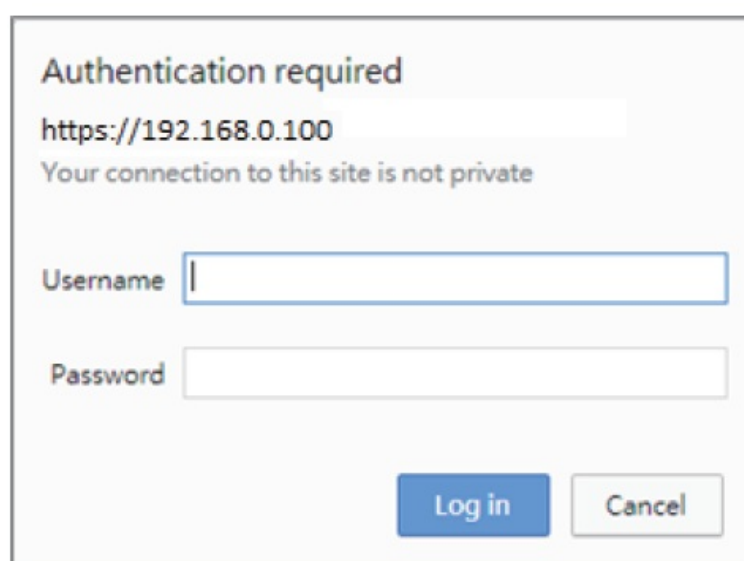


Figure 9-3: Login Screen

4. After logging in, you will be prompted to change the initial password to a permanent

one.

Change Password

New Password	
Password	<input type="password"/> <input type="checkbox"/> show password
Retype Password	<input type="password"/>

The password must contain 8-31 characters, including upper case, lower case, numerals and other symbols. Please note spaces (blanks) are not accepted.

Figure 9-4: Create a New Password

5. After entering the password, the main screen appears as Figure 9-5 shows.



Figure 9-5: Web Main Screen of Industrial Managed Switch

The Switch Menu on the left of the Web page lets you access all the commands and statistics the Industrial Managed Switch provides.

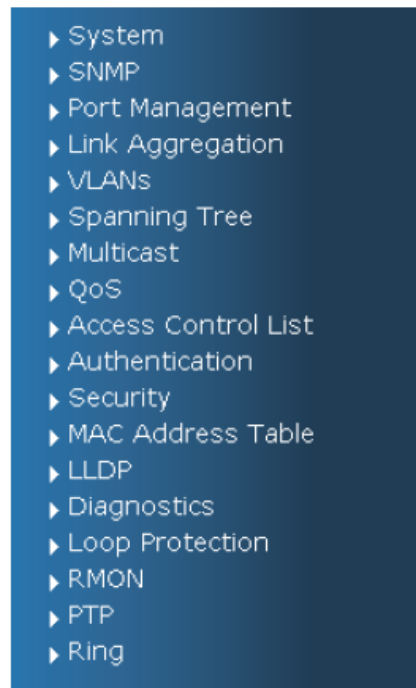


Figure 9-6: Switch Menu

NOTE

If you are not familiar with Switch functions or the related parameter, press “Help icon” anytime on the Web page to get the help description.


Now, you can use the Web management interface to continue the Switch management. Please refer to the user’s manual for more details.

Saving Configuration via Web

To save all applied changes and set the current configuration as a startup configuration, the startup-configuration file will be loaded automatically across a system reboot.

NOTE The following console screen is based on the firmware version before May of 2025.

1. Click System, Save Startup Config.

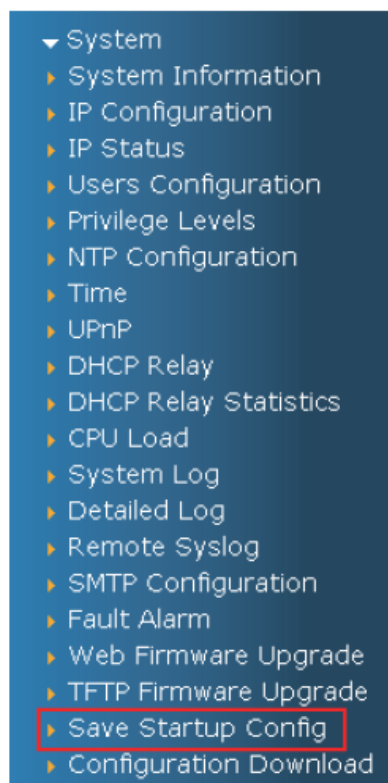

2. Press the “Save Configuration” button.



Figure 10-1: Save Config

NOTE The following web screen is based on the firmware version of May of 2025 or after.

3. Click the Save icon on the top Switch Menu bar.

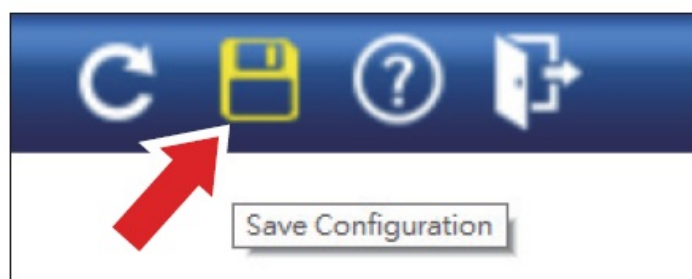


Figure 10-2: Save Config – Hot Key

4. Press the “Save Configuration” button.



5. Or the other way to save the setting is to Click Maintenance, Save Startup Config.

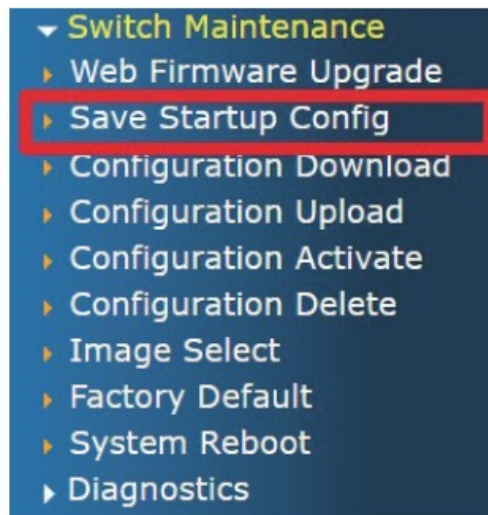


Figure 10-3: Save Config – Maintenance

Recovering Back to Default Configuration

- IP address has been changed or admin password has been forgotten –

NOTE Follow all the recovering back to default configuration steps as shown in the example.

1. Power off the Industrial Managed Switch and remove all the existing connections.
2. Use the straight RJ45 cable to connect to port 1 and port 2 in the loop topology as shown below:



3. Power on the Industrial Managed Switch and 6 LNK/ACT LEDs will be lit.

4. Resetting Industrial Managed Switch to the factory default is done when 6 LNK/ACT LEDs are lit again.
5. Remove the RJ45 cable from port 1 and port 2.
6. Reset the Industrial Managed Switch to factory default configuration.
7. The Industrial Managed Switch will then reboot and load the default settings. Please refer to Chapter 9 for details.

Customer Support

Thank you for purchasing PLANET products. You can browse our online FAQ resource and User's Manual on PLANET Web site first to check if it could solve your issue. If you need more support information, please contact PLANET switch support team.

- **PLANET online FAQ:** <https://www.planet.com.tw/en/support/faq>
- **Switch support team mail address:** support@planet.com.tw
- **IGS-5227-6T/IGS-5227-6MT-X User's Manual:**
<https://www.planet.com.tw/en/support/downloads?method=category&c1=industrial-ethernet&p=&type=3>



(Please select your switch model name from the drop-down menu of Product Models.)

Copyright © PLANET Technology Corp. 2025

Contents are subject to revision without prior notice. PLANET is a registered trademark of PLANET Technology Corp. All other trademarks belong to their respective owners.

FAQ


- **Q: What should I do if any item is missing or damaged in the package?**

A: If any item is found missing or damaged, please contact your local reseller for replacement.

- **Q: Can I use a different waterproof RJ45 connector with the IGS-5227-6T?**

A: No, always use only the waterproof RJ45 connector provided in the package. Using a different connector may damage the device permanently.

Documents / Resources

	Planet Technology IGS-5227-6T,IGS-5227-6MT-X Managed Ethernet Switch [pdf] Installation Guide IGS-5227-6T, IGS-5227-6MT-X, IGS-5227-6T IGS-5227-6MT-X Managed Ethernet Switch, IGS-5227-6T IGS-5227-6MT-X, Managed Ethernet Switch, Ethernet Switch, Switch
---	--

References

- [User Manual](#)

Planet

Technology

Ethernet Switch, IGS-5227-6MT-X, IGS-5227-6T, IGS-5227-6T IGS-5227-6MT-X, IGS-5227-6T IGS-5227-6MT-X Managed Ethernet Switch, Managed Ethernet Switch, Planet Technology, switch

Leave a comment

Your email address will not be published. Required fields are marked *

Comment *

Name

Email

Website

☐ Save my name, email, and website in this browser for the next time I comment.

Post Comment

Search:

e.g. whirlpool wrf535swhz

Search

[Manuals+](#) | [Upload](#) | [Deep Search](#) | [Privacy Policy](#) | [@manuals.plus](#) | [YouTube](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.