



PLANET Technology SGS-6310 Series Layer 3 Gigabit-10 Gigabit Stackable Managed Switch Installation Guide

[Home](#) » [Planet Technology](#) » PLANET Technology SGS-6310 Series Layer 3 Gigabit-10 Gigabit Stackable Managed Switch Installation Guide 

PLANET

Layer 3 Gigabit/10 Gigabit Stackable Managed Switch
SGS-6310 Series
Quick Installation Guide

Contents

- [1 Package Contents](#)
- [2 Switch Management](#)
- [3 Requirements](#)
- [4 Terminal Setup](#)
- [5 Starting Web Management](#)
- [6 LED Indicators](#)
- [7 Customer Support](#)
- [8 Documents / Resources](#)
- [9 Related Posts](#)
















Package Contents

Thank you for purchasing Layer 3 Gigabit/10 Gigabit Stackable Managed Switch, SGS-6310-16S8C4XR/SGS-6310-24T4X/SGS-6310-24P4X/SGS-6310-48T6X/SGS-6310-48P6XR.

Unless specified, "Managed Switch" mentioned in this Quick Installation Guide refers to the SGS-6310-16S8C4XR/SGS-6310-24T4X/SGS-6310-24P4X/SGS-6310-48T6X/SGS-6310-48P6XR.

Model	Description
SGS-6310-16S8C4XR	L3 16-Port 100/1000X SFP + 8-Port Gigabit TP/SFP + 4-Port 10G SFP+ Stackable Managed Switch (Dual 100~240V AC)
SGS-6310-24T4X	L3 24-Port 10/100/1000T + 4-Port 10G SFP+ Stackable Managed Switch
SGS-6310-24P4X	L3 24-Port 10/100/1000T 802.3at PoE + 4-Port 10G SFP+ Stackable Managed Switch
SGS-6310-48T6X	L3 48-Port 10/100/1000T + 6-Port 10G SFP+ Stackable Managed Switch
SGS-6310-48P6XR	L3 48-Port 10/100/1000T 802.3at PoE + 6-Port 10G SFP+ Stackable Managed Switch with 55V DC Redundant Power

Open the box of the Managed Switch and carefully unpack it. The box should contain the following items:

	SGS-6310- 16 S8C4XR	SGS-6310- 24 T4X	SGS-6310- 24 P4X	SGS-6310- 48 T6X	SGS-6310- 48 P6XR
Quick Installation Guide					
DB9 to RJ45 Interface RS232 Console Cable					
Rack-mount Accessory Kit					
AC Power Cord	2	1	1	1	1
SFP Dust Cap	28	4	4	6	6

If any item is found missing or damaged, please contact your local reseller for replacement.

Switch Management

To set up the Managed Switch, the user needs to configure the Managed Switch for network management. The Managed Switch provides two management options: Out-of-Band Management and In-Band Management.

Out-of-Band Management

Out-of-band management is the management through console interface.

Generally, the user will use out-of-band management for the initial switch configuration, or when in-band management is not available.

In-Band Management

In-band management refers to the management by logging in to the Managed Switch using Telnet or HTTP, or using SNMP management software to configure the Managed Switch. In-band management enables the management of the Managed Switch to attach some devices to the Switch. The following procedures are required

to enable in-band management:

1. Log on to console
2. Assign/Configure IP address
3. Create a remote login account
4. Enable HTTP or Telnet server on the Managed Switch

In case in-band management fails due to Managed Switch configuration changes, out-of-band management can be used for configuring and managing the Managed Switch.



Important

The Managed Switch is shipped with VLAN1 interface IP address 192.168.0.254/24 assigned by default. User can assign another IP address to the Managed Switch via the console interface to be able to remotely access the Managed Switch through Telnet or HTTP.

Requirements

- Workstations running Windows XP/2003/Vista/2008/7/8/10, MAC OS X or later, Linux, UNIX, or other platforms are compatible with TCP/IP protocols.
- Workstations are installed with Ethernet NIC (Network Interface Card)
- Serial Port Connection (Terminal)

The above Workstations come with COM Port (DB9) or USB-to-RS232 converter.

The above Workstations have been installed with terminal emulator, such as Tera Term or PuTTY.

Serial cable — one end is attached to the RS232 serial port, while the other end to the console port of the Managed Switch.

- Management Port Connection

Network cables — Use standard network (UTP) cables with RJ45 connectors.

- The above PC is installed with Web browser



Note It is recommended to use Google Chrome or above to access the Managed Switch. If the Web interface of the Managed Switch is not accessible, please turn off the anti-virus software or firewall and then try it again.

Terminal Setup

To configure the system, connect a serial cable to a COM port on a PC or notebook computer and to serial (console) port of the Managed Switch. The console port of the Managed Switch is DCE already, so that you can connect the console port directly through PC without the need of Null Modem.

PC / Workstation with Terminal Emulation Software

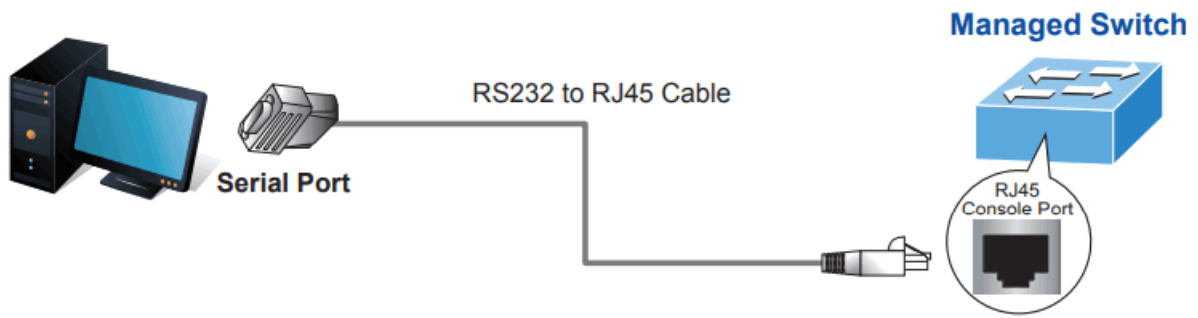


Figure 4-1 Managed Switch Console Connectivity

A terminal program is required to make the software connection to the Managed Switch. Tera Term program may be a good choice. The Tera Term can be accessed from the Start menu.

1. Click START menu, then Programs, and then Tera Term.
2. When the following screen appears, make sure that the COM port should be configured as:

- Baud: 9600
- Parity: None
- Data bits: 8
- Stop bits: 1
- Flow control: None

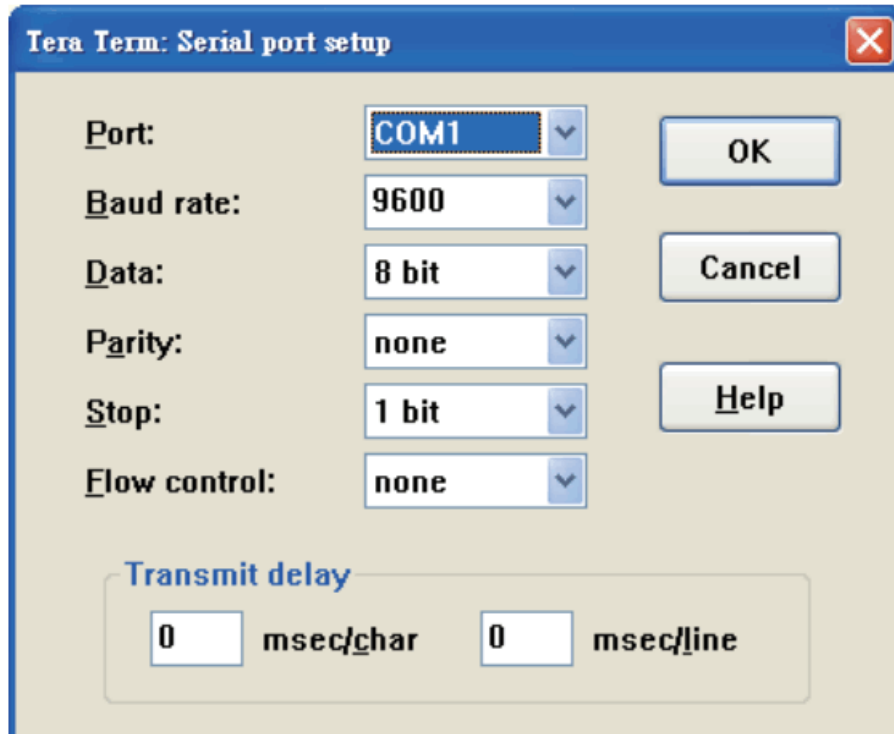


Figure 4-2 Tera Term COM Port Configuration

4.1 Logging on to the Console

Once the terminal is connected to the device, power on the Managed Switch, and the terminal will display "running testing procedures".

Then, the following message asks for the login user name and password. The factory default user name and password are as follows as the login screen in Figure 4-3 appears.

Username: admin
Password: admin

```
User Access Verification

Username: admin
Password:
Switch>enable
Switch#
```

Figure 4-3 Managed Switch Console Login Screen

The user can now enter commands to manage the Switch. For a detailed description of the commands, please refer to the following chapters.



1. **Note** For security reason, please change and memorize the new pass-word after this first setup.
2. Accept command in lowercase or uppercase letter under console interface.

4.2 Configuring IP Address

The IP address configuration commands for VLAN1 interface are listed below.

Before using in-band management, the Managed Switch must be configured with an IP address by out-of-band management (i.e. console mode). The configuration commands are as follows:

```
Switch>enable
Switch#config
Switch_config#interface vlan 1
Switch_config_v1#ip address 192.168.1.254 255.255.255.0
```

The previous command would apply the following settings for the Managed Switch.

IPv4 Address: 192.168.1.254
Subnet Mask: 255.255.255.0

```
Switch>
Switch>enable
Switch#Jan  1 01:52:14 User admin enter privilege mode from

Switch#config
Switch_config#interface vlan 1
Switch_config_v1#ip address 192.168.1.254 255.255.255.0
Switch_config_v1#
```

Figure 4-4 Configuring IPv4 Address Screen

To check the current IP address or modify a new IP address for the Managed Switch, please use the procedures as follows:

- Show the current IP address

1. On “Switch#” prompt, enter “show ip interface brief”.

2. The screen displays the current IP address, subnet mask and gateway as shown in Figure 4-5.

```
Switch#config
Switch_config#interface vlan1
Switch_config_vl#ip address 192.168.1.254 255.255.255.0
Switch_config_vl#
Switch_config_vl#
Switch_config_vl#
Switch_config_vl#exit
Switch_config#show ip interface brief
Interface                IP-Address      Method Protocol-Status
Null0                    unassigned      manual up
VLAN1                    192.168.1.254  manual up
Switch_config#
```

Figure 4-5 Showing IP Information Screen

If the IP is successfully configured, the Managed Switch will apply the new IP address setting immediately. You can access the Web interface of Managed Switch through the new IP address.



If you are not familiar with console command or the related parameter, enter “help” anytime in console to get the help description.

4.3 Setting 1000BASE-X for 10G SFP+ Port

The Managed Switch supports both 1000BASE-X and 10GBASE-X SFP transceivers by manual setting and the default SFP+ port speed is set in the fiber auto mode, so the end-user can plug the transceiver directly.

In another example, the end-user has to force the fiber connection with 1000BASE-X SFP transceiver in the tgigaethernet 0/1. The following command configuration is required:

```
Switch#config
Switch_config#interface TGigaEthernet0/1
Switch_config_tg0/1#no fiber-auto-config
Switch_config_tg0/1#speed 1000
Switch_config_tg0/1#exit
```

Figure 4-6 Setting 1000BASE-FX Screen

4.4 Changing Password

The default password of the switch is “admin”. For security reason, it is recommended to change password and the following command configuration is required:

```
Switch#config
Switch_config#username admin password planet2022
Switch_config#
```

Figure 4-7 Changing Password Interface Screen

4.5 Saving the Configuration

In Managed Switch, the running configuration file stores in the RAM. In the current version, the running configuration sequence running-config can be saved from the RAM to FLASH by write command, so that the running configuration sequence becomes the start-up configuration file, which is called configuration save.

```
Switch#write
Switch#write
Saving current configuration.
OK!
Switch#Jan 2 00:56:04 /startup-config is wrote, TID:85bd29c0
```

Figure 4-8 Write Screen

Starting Web Management

The Managed Switch provides a built-in browser interface. You can manage it remotely by having a remote host with Web browser, such as Google Chrome, Mozilla Firefox, Google Chrome or Apple Safari.



Figure 5-1 IP Management Diagram

The following shows how to start up the Web Management of the Managed Switch. Please note the Managed Switch is configured through an Ethernet connection. Please make sure the manager PC must be set to the same IP subnet address.

For example, the IP address of the Managed Switch is configured with 192.168.0.254 on Interface VLAN 1, then the manager PC should be set to 192.168.0.x (where x is a number between 2 and 253, except 1 or 254), and the default subnet mask is 255.255.255.0.

The factory default user name and password are as follows:

Default IP of Interface VLAN 1: 192.168.0.254

Username: admin

Password: admin

5.1 Logging in to the Managed Switch from Copper Ports

1. Use Google Chrome or above Web browser and enter IP address <http://192.168.0.254> (that you have just set in console) to access the Web interface.
2. When the following dialog box appears, please enter the configured username “admin” and password “admin” (or the username/password you have changed via console). The login screen in Figure 5-2 appears.

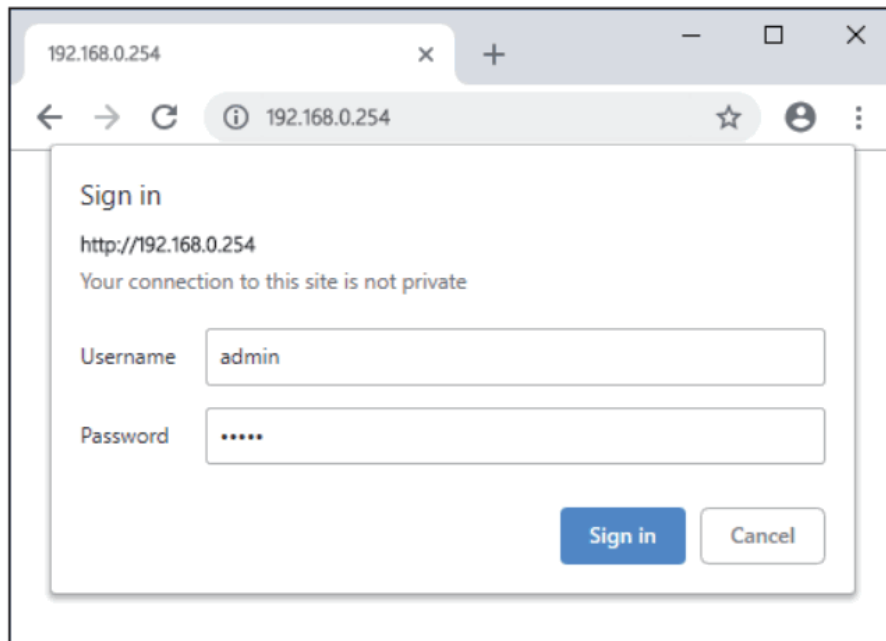


Figure 5-2 Login Screen

- After entering the password, the main screen appears as shown in Figure 5-3.

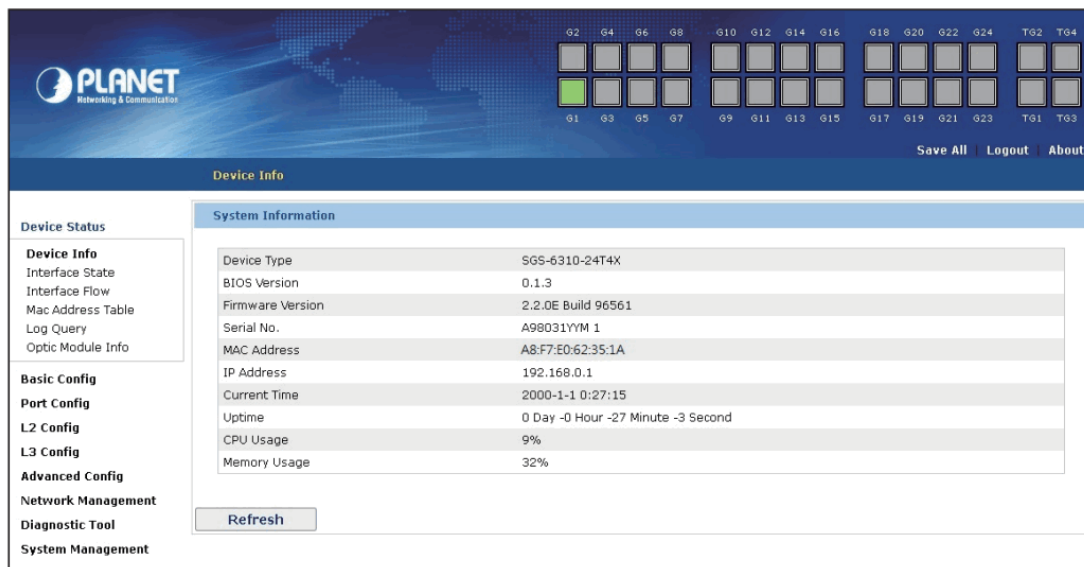


Figure 5-3 Web Main Screen of Managed Switch

- The Switch Menu on the left of the Web page lets you access all the commands and statistics the Switch provides.

Now, you can use the Web management interface to continue the Switch management or manage the Managed Switch by console interface. Please refer to the user manual for more.

5.2 Saving Configuration via the Web

The configuration area is to show the content that is selected in the navigation area. The configuration area always contains one or more buttons, such as “Refresh”, “Apply” and “Reset”.

The “Apply” button indicates applying the modified configuration to the device.

The application of the configuration does not mean that the configuration is saved in the configuration file.

To save the configuration, you have to click “Save All” on the top control bar.

“Save All” function is equivalent to the execution of the write command.

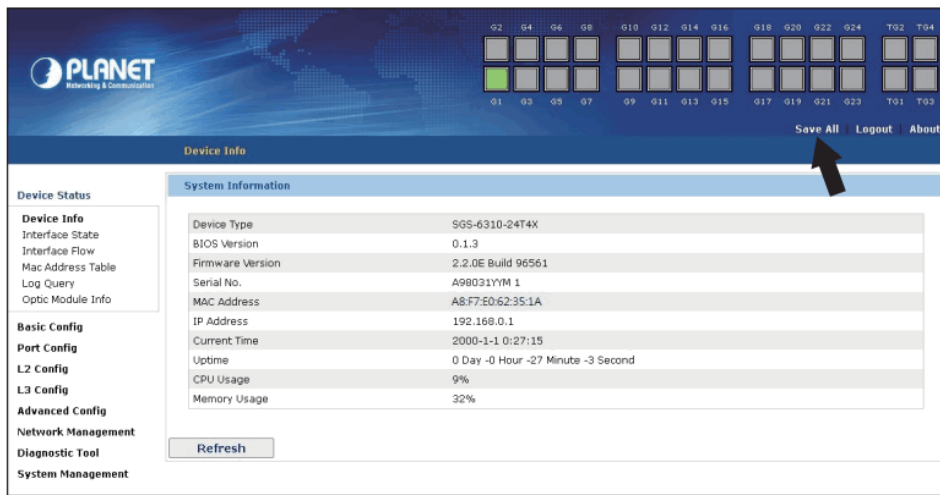


Figure 5-4 Save Cconfiguration

LED Indicators

6.1 SGS-6310-24T4X System

LED	Color	Function
PWR	Green	Lights to indicate that the Switch has power.
	Off	Power is off.
SYS	Green	Slow blinks to indicate the system is normally starting up.

Interfaces

LED	Color	Function	
LNK/ACT	Green	Lights	Indicating the port is running and the connection is successfully established.
		Blinks	Indicating that the switch is actively sending or receiving data over the port.

10G Status LED

LED	Color	Function	
LNK/ACT (Ports 25-28)	Green	Lights	Indicating the port is running and the connection is successfully established.
		Blinks	Indicating that the switch is actively sending or receiving data over that port.

6.2 SGS-6310-24P4X System

LED	Color	Function	
PWR	Green	Lights to indicate that the Switch has power.	
	Off	Power is off.	
SYS	Green	Slow blinks to indicate the system is normally starting up.	

Interfaces

LED	Color	Function	
1000 LNK/ ACT	Green	Lights	Indicating the port is running at 1000Mbps speed and successfully established.
		Blinks	Indicating that the switch is actively sending or receiving data over that port.
10/100 LNK/ ACT	Amber	Lights	Indicating the port is running at 10/100Mbps speed and successfully established.
		Blinks	Indicating that the switch is actively sending or receiving data over that port.
802.3at PoE In-Use	Amber	Lights	PD is connected and PoE power supply is normal.
		Off	PD is not connected or PoE power supply is not provided.

10G Status LED

LED	Color	Function	
10G LNK/ ACT	Amber	Lights	Indicating the port is running at 10Gbps speed and successfully established.
		Blinks	Indicating that the switch is actively sending or receiving data over the port.
1000 LNK/ ACT	Green	Lights	Indicating the port is running at 1000Mbps speed and successfully established.
		Blinks	Indicating that the switch is actively sending or receiving data over the port.

6.3 SGS-6310-16S8C4XR System

LED	Color	Function
PWR	Green	Lights to indicate that the Switch has power.
	Off	Power is off.
SYS	Green	Slow blinks to indicate the system is normally starting up.

Interfaces

LED	Color	Function	
LNK/ACT	Green	Lights	Indicating the port is running and the connection is successfully established.
		Blinks	Indicating that the switch is actively sending or receiving data over the port.

10G Status LED

LED	Color	Function	
LNK/ACT (Ports 25-28)	Green	Lights	Indicating the port is running and the connection is successfully established.
		Blinks	Indicating that the switch is actively sending or receiving data over the port.

6.4 SGS-6310-48T6X

System

LED	Color	Function
PWR	Green	Lights to indicate that the Switch has power.
	Off	Power is off.
SYS	Green	Slow blinks to indicate the system is normally starting up.

Interfaces


LED	Color	Function	
LNK/ACT	Green	Lights	Indicating the port is running and the connection is successfully established.
		Blinks	Indicating that the switch is actively sending or receiving data over that port.

10G Status LED

LED	Color	Function	
LNK/ACT (TG1-TG6)	Green	Lights	Indicating the port is running and the connection is successfully established.
		Blinks	Indicating that the switch is actively sending or receiving data over that port.

6.5 SGS-6310-48P6XR

LED Mode: It indicates the link to a PD is connected and PoE supply is normal.

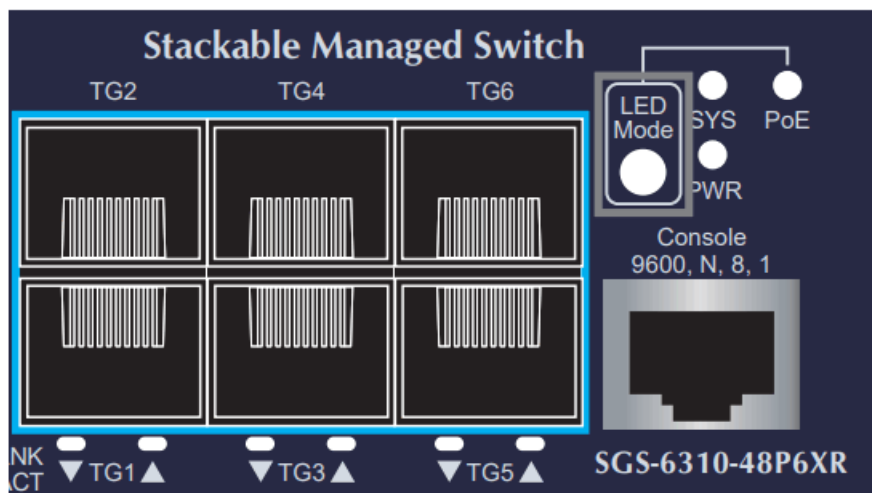

System

LED	Color	Function	
PWR	Green	Lights	Lights to indicate that the Switch has power.
		Off	Power is off.
SYS	Green	Slow blinks	To indicate the system is normally starting up.
PoE	Green	Lights	Lights to indicate that the PoE device is detected.
		Off	Indicating the network Link behavior.

Interfaces

LED	Color	Function	
LNK/ACT	Green	Lights	Indicating the port is running and the connection is successfully established.
		Blinks	Indicating that the switch is actively sending or receiving data over that port.
802.3at PoE-in-Use	Green	Lights	PD is connected and PoE power supply is normal.
		Off	PD is not connected or PoE power supply is not provided.

10G Status LED

LED	Color	Function	
LNK/ACT (TG1-TG6)	Green	Lights	Indicating the port is running and the connection is successfully established.
		Blinks	Indicating that the switch is actively sending or receiving data over the port.

Customer Support

Thank you for purchasing PLANET products. You can browse our online FAQ resource at the PLANET Web site first to check if it could solve your issue. If you need more support information, please contact PLANET support team.

PLANET online FAQs: <https://planet.com.tw/en/support/faq>

Support team mail address: support@planet.com.tw


SGS-6310-Series User's Manual

<https://www.planet.com.tw/en/support/downloads?&method=keyword&keyword=SGS-6310&view=3#list>



<https://www.planet.com.tw/en/support/downloads?&method=keyword&keyword=SGS-6310&view=3#list>

Documents / Resources

	<p>PLANET Technology SGS-6310 Series Layer 3 Gigabit-10 Gigabit Stackable Managed Switch [pdf] Installation Guide</p> <p>SGS-6310 Series Layer 3 Gigabit-10 Gigabit Stackable Managed Switch, SGS-6310 Series, Layer 3 Gigabit-10 Gigabit Stackable Managed Switch, Gigabit-10 Gigabit Stackable Managed Switch, Gigabit Stackable Managed Switch, Stackable Managed Switch, Managed Switch, Switch</p>
---	--