



Player One

# Apollo-M MAX Apollo Camera



## Player One Apollo-M MAX Apollo Camera User Manual

[Home](#) » [Player One](#) » Player One Apollo-M MAX Apollo Camera User Manual 

### Contents

- [1 Player One Apollo-M MAX Apollo Camera](#)
- [2 Product Features](#)
- [3 Technical parameters](#)
- [4 Product Description](#)
- [5 Features](#)
- [6 Performance](#)
- [7 Mechanical Drawing](#)
- [8 Package List](#)
- [9 FAQ](#)
- [10 Documents / Resources](#)
  - [10.1 References](#)




Player One

**Player One Apollo-M MAX Apollo Camera**



## Product Features

Apollo series is the world's first camera line designed specifically for solar photography, named after Apollo. The Apollo series features Sony sensors with global shutters and a focus on monochrome sensors.

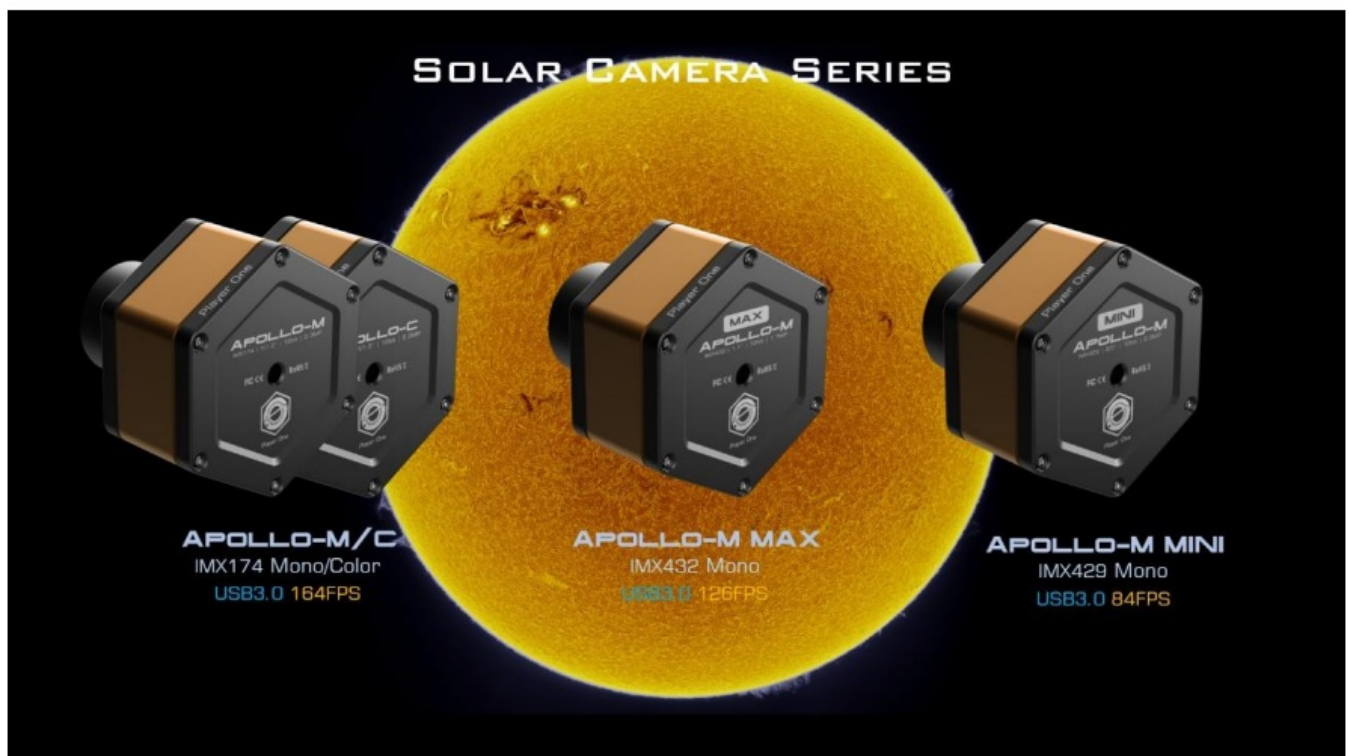


## Technical parameters

<b>Sensor</b>	SONY IMX432 1.1" CMOS (mono)
<b>Diagonal</b>	17.5mm
<b>Total Pixels</b>	1.7 Mega Pixels
<b>Max Resolution</b>	1608×1104
<b>Pixel Size</b>	9μm
<b>Chip Size</b>	14.5mm×9.9mm
<b>Frame Rate</b>	126FPS 12bit
<b>Shutter</b>	Global shutter
<b>Exposure Range</b>	32μs-2000s
<b>Readout Noise</b>	22.9e~2.6e
<b>QE Peak</b>	≈79%
<b>Full Well</b>	100k e
<b>ADC</b>	12 bit
<b>Data Port</b>	USB3.0/USB2.0
<b>Adapter</b>	1.25" / M42X0.75
<b>Back Focal Length</b>	12.5mm
<b>Protective Window</b>	D32*2MM High Quality AR Plus (Anti Reflection) Multi-Layer Coating
<b>Diameter</b>	66mm
<b>Weight</b>	160g
<b>Resolution and FPS</b>	Under USB3.0 mode Resolution 12bit ADC 1608×1104 126FPS More resolution options could be setup in capture software!

## Product Description

Apollo-M MAX is a solar camera developed by Player One Astronomy, which adopts the Sony IMX432 1.1" format monochrome sensor. The 9um pixel size accommodates a well depth of 100ke with a total of 1.7MP (the resolution is 1608\*1104), and the diagonal is 17.5mm.

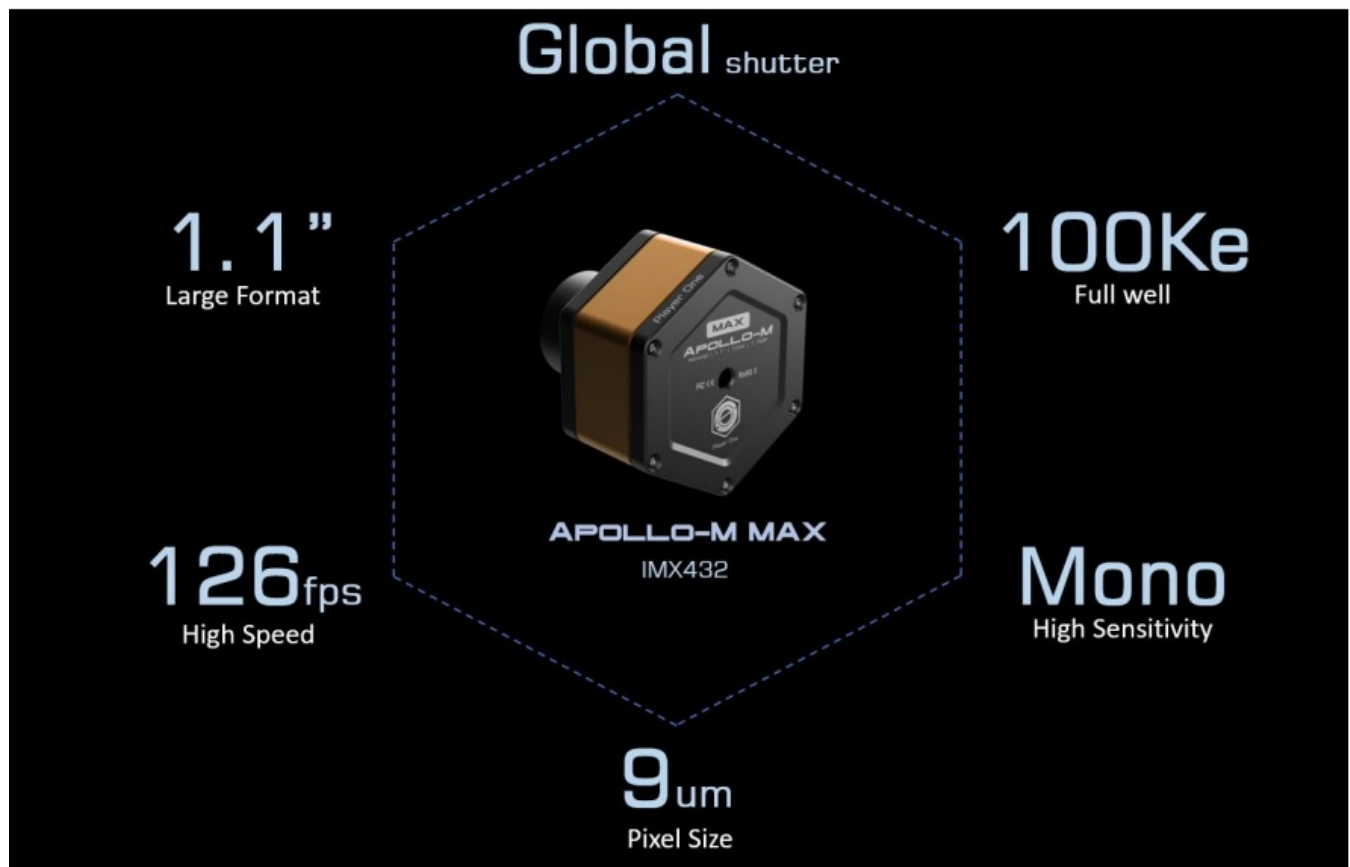


## Pregius Technology

Apollo-M MAX (IMX432) is based on Pregius 3rd Generation. But IMX432 is quite different. According to the introduction of technical documents, pixel size of 3rd Gen usually is 4.5um, and full well is 25Ke. But this sensor has 9um pixel, and of course the full well up to 4x (100Ke).


## Format

Apollo-M MAX (IMX432) has 1.1" format, it is pretty big, almost twice of IMX174 chip.

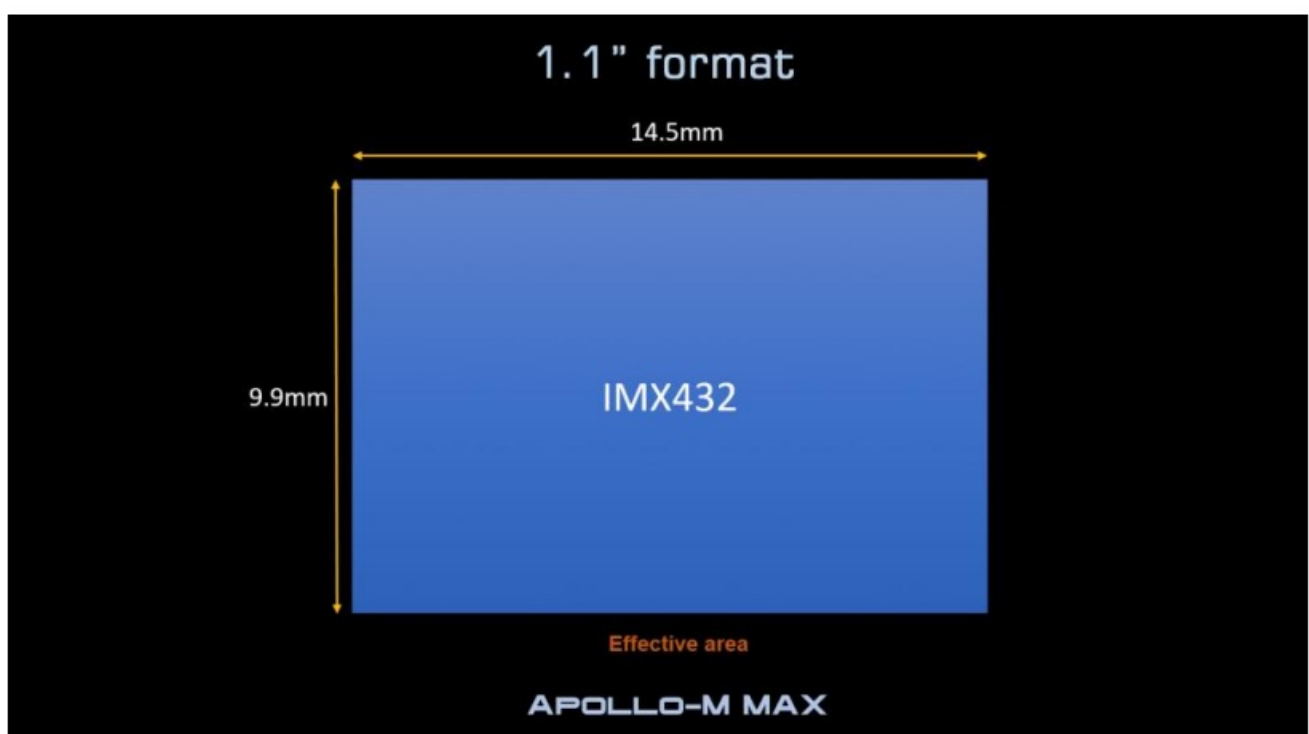

## Pixel size

9um pixel size is 1.5 times bigger than IMX174 camera, which means it can work at longer focal ratio, such as SCT + Daystar filter (with 4.2X).

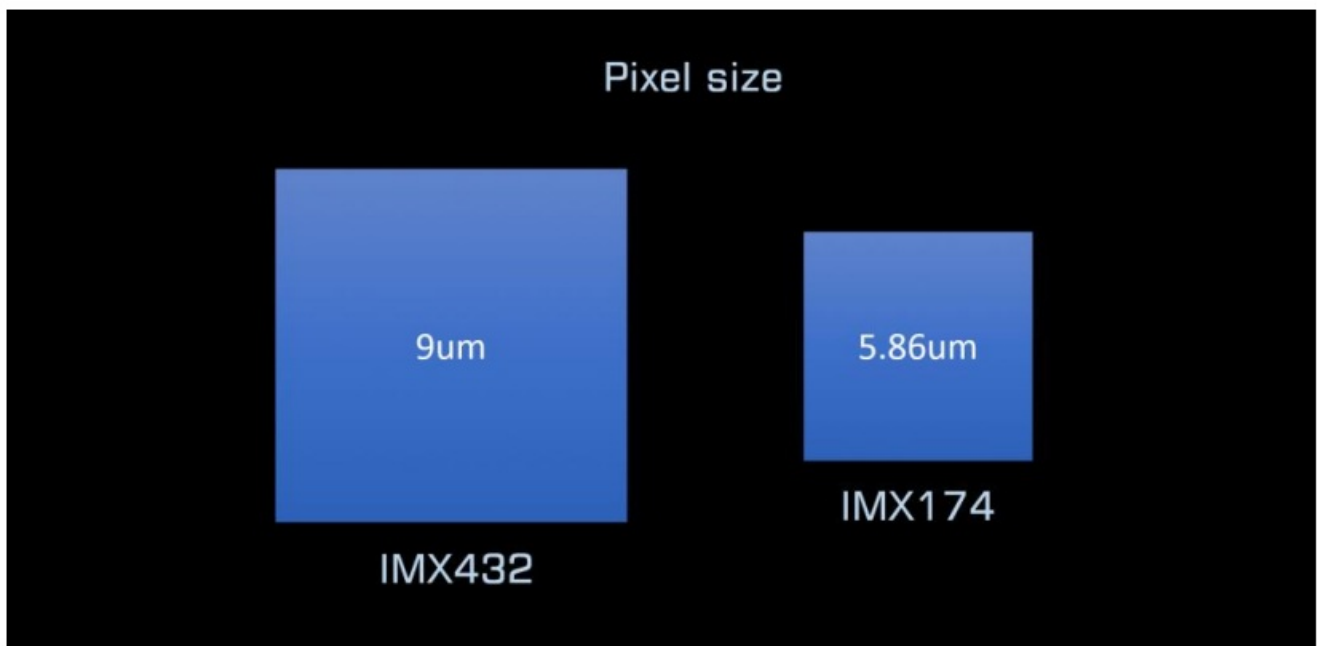


## Full Well

100Ke full well, is 3 times bigger than IMX174. This feature will bring some new possibility in imaging. What we can imagine is HDR the Sun and prominence, or maybe the bright and dark side of the Moon.




## HCG and Noise

HCG mode will automatic open when Gain  $\geq 145$ , readout noise will drop to 4.6e. And dynamic range will rise to 12 drops again. At 380 gain, readout noise of Apollo-M MAX (IMX432) camera is 2.6e, it is lower than IMX174. And full well will still bigger than IMX174.

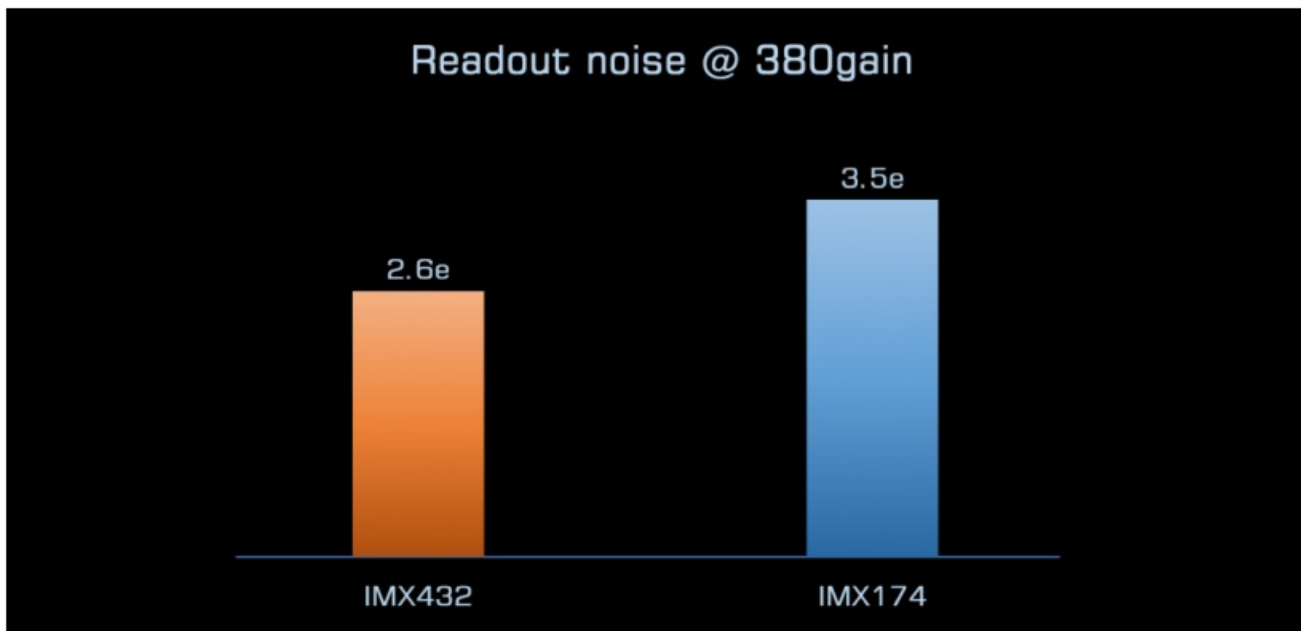


### No banding

Row noise problem is a big trouble in solar imaging. When we use IMX174 or IMX178 cameras, bandings occur sometimes. Although we can make it slight in post-processing, but it still does negative affect on the details. The biggest surprise in testing Apollo-M MAX is, we found that images of IMX432 are so smooth, no annoying horizontal banding. So that, we can focus on capture details in any focal ratio, in any way (full disk mosaic or ROI), never need to worry about banding issue in post-processing.

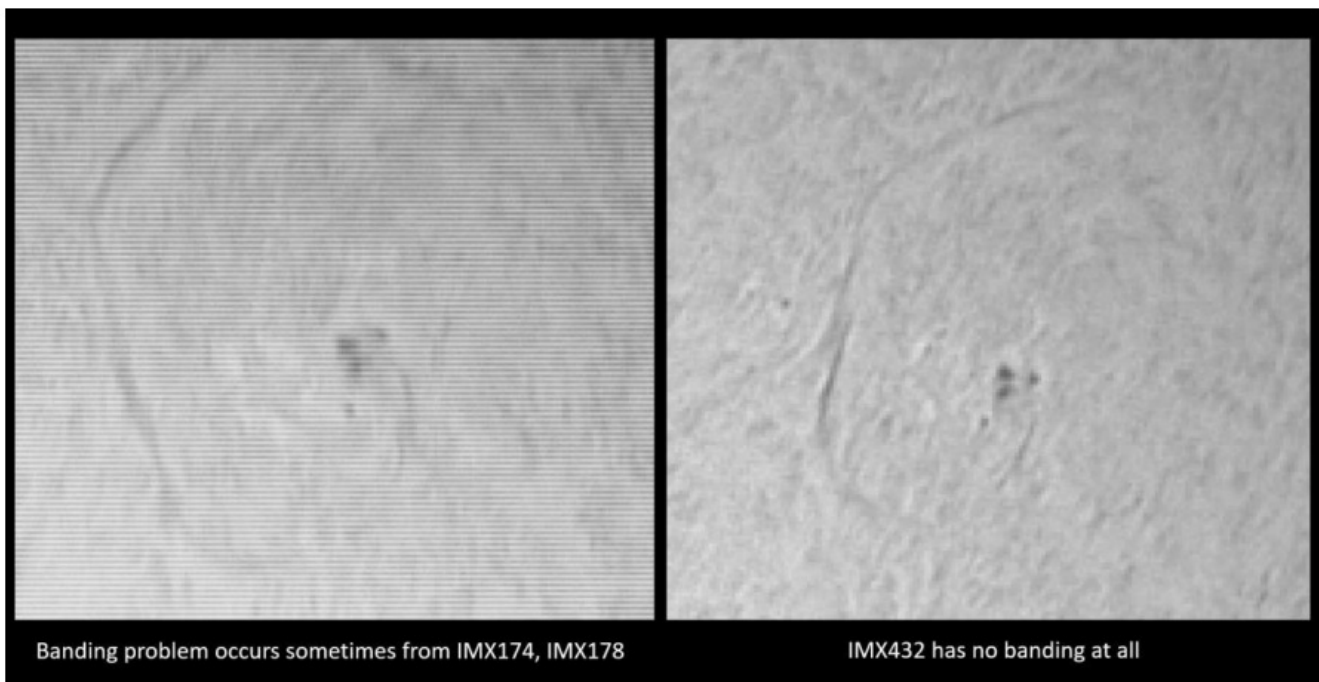

With global shutter, Apollo-M MAX are very suitable for sun and space station imaging.

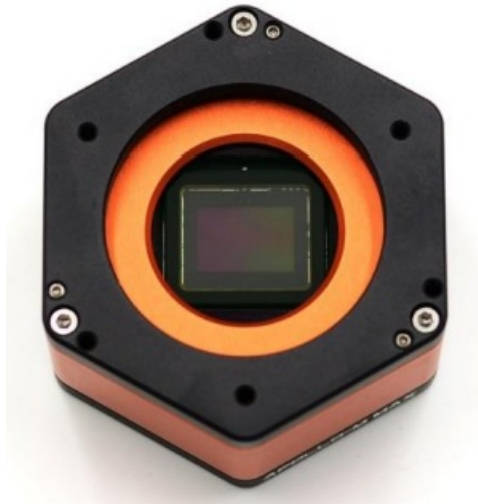

## Recommended accessories

### ACS (Active Cooling System)

ACS is an external air-cooled system, designed for solar and big format planetary cameras which already has PCS (Passive Cooling System). ACS can provide much better temperature control. When camera has PCS + ACS, temperature is only 7 higher than ambient, camera body is a little warm but won't hot! ACS is not only can be used in daylight for solar imaging, it also could be used in night for DSO lucky imaging.

<https://player-one-astronomy.com/product/active-cooling-system-acs-for-uncooled-cameras/>



## Features

The naming of Player One Astronomy cameras is unique. Solar camera line, named after Apollo, the god of the sun. The suffix of the name describes the camera's biggest feature.





**APOLLO-M MAX**  
MONO CAMERA

1608×1104@126fps

720P@187fps

**Features:**

- ✓ High Sensitivity | Well-known Sony IMX432 Monochrome sensor.
- ✓ Global Shutter | Best for solar and artificial object imaging.
- ✓ DDR Cache | DDR3 256MB.
- ✓ Nova Boosting Technology | Break 98FPS limit, 30% Faster.
- ✓ Passive Cooling System | Lower the sensor temperature.
- ✓ DPS Technology | Suppress dead pixels, improve image quality.
- ✓ Sensor Tilt Plate | Remove newton ring in solar imaging.
- ✓ USB3.0 | Up to 126FPS.
- ✓ ST4 Port | Easy for guiding.

Apollo-M MAX has 1.1" format sensor and 9um pixel size, best for large telescopes.

**Drivers and software download:**

<http://player-one-astronomy.com/service/software/>

**Manuals download:**

<http://player-one-astronomy.com/service/manuals/>

### Cutting-edge Design

The planetary cameras developed by Player One Astronomy uses a scientific and technological regular hexagon to construct the main body line, supplemented by round chamfers to achieve both rigidity and flexibility. The positive orange, which is imply solar, is matched with the low-key and steady black, and the super-fine frosting process on the entire surface makes the camera look luxurious and cool, highlighting the style of high-end players, can't take my eyes off




### 2nd Gen – Sensor Tilt Plate

When taking solar photographs with a prominence telescope, the Newton ring is annoying. Smoother solar image without Newton ring could be taken by adjusting the focal plate. Get a much smaller field curvature of the telescope.






The built-in high-density sponge shading pad can block the light from the side slits without any side leakage.


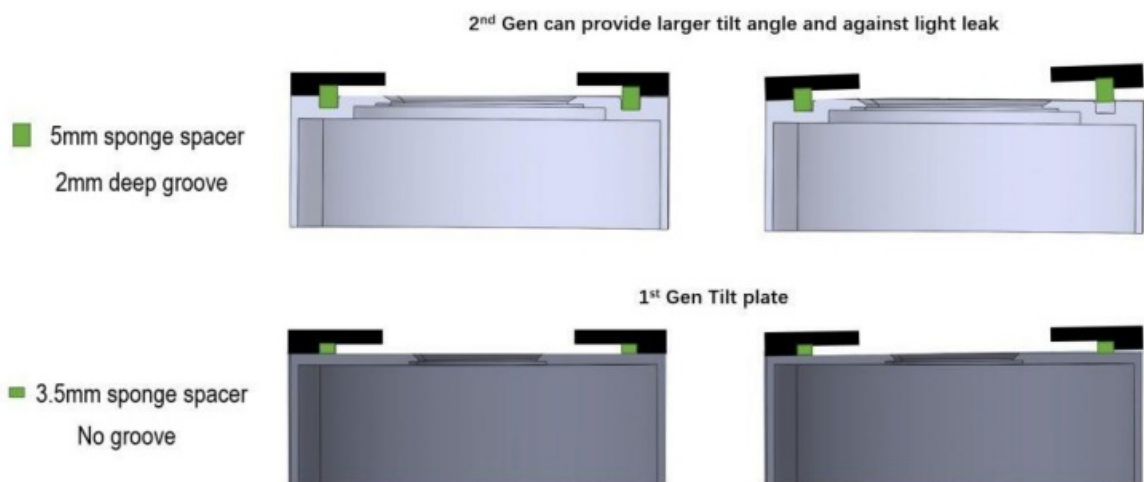


Newton Ring is a common thing in Ha Solar imaging, use build-in or extra tilt plate can perfectly remove it.

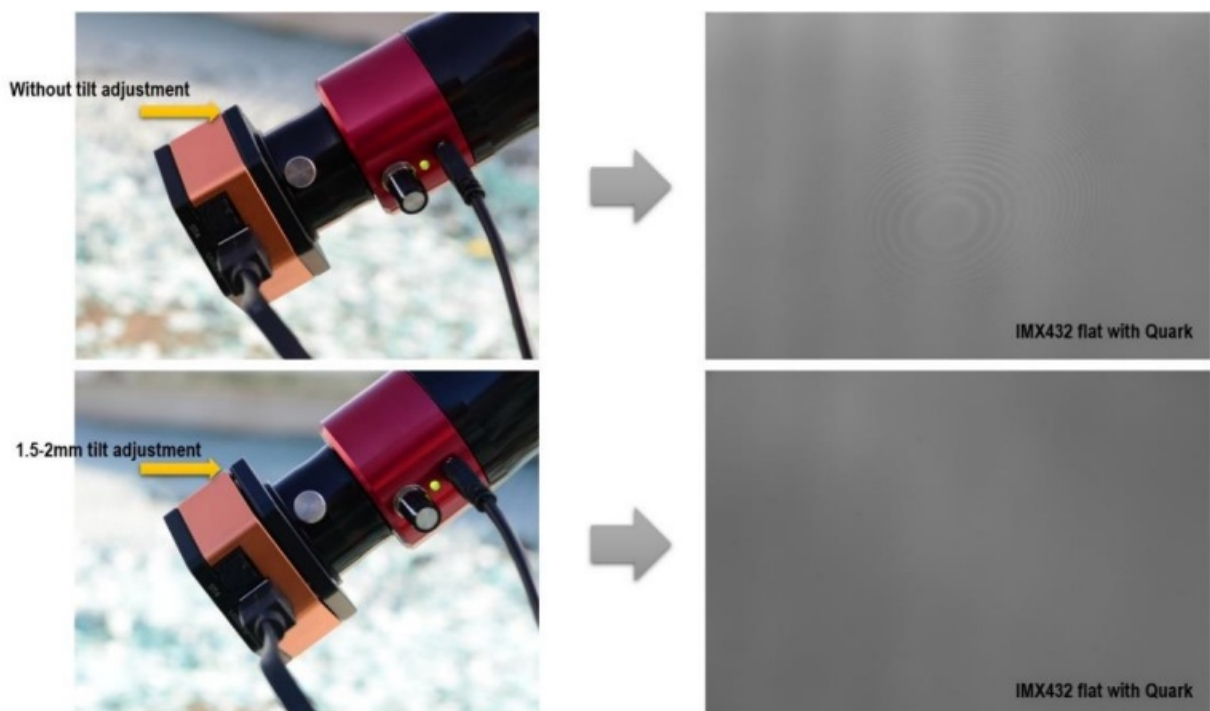


## Passive Cooling System

Solar cameras working in daylight, temperature could be much higher than night. Heat of global shutter sensors will be a problem, especially some big format like IMX432. Player One add one new feature called Passive Cooling System to conduct the heat from the sensor out

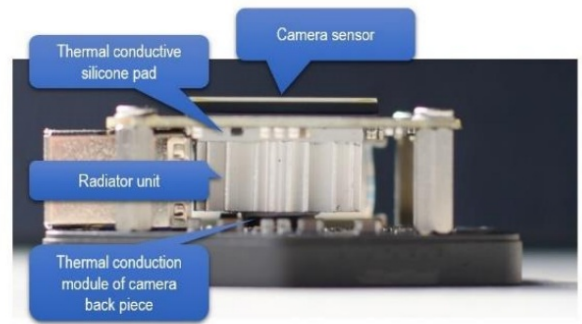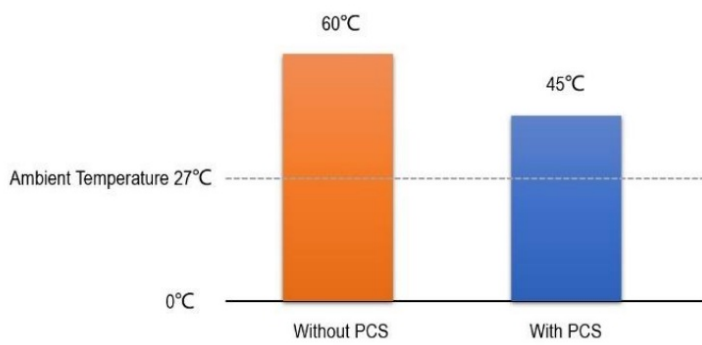

## 256M DDR3 Cache

Player One Astronomy cameras are the first one who adopts the DDR3 cache in all planetary cameras in the world! It helps stabilize and secure data transmission, it effectively avoids frame dropping and greatly reduces readnoise. With the DDR3 cache, the camera does not have high demands on computing needs any longer, it will still have excellent performance even if it is connected to a USB 2.0 port.

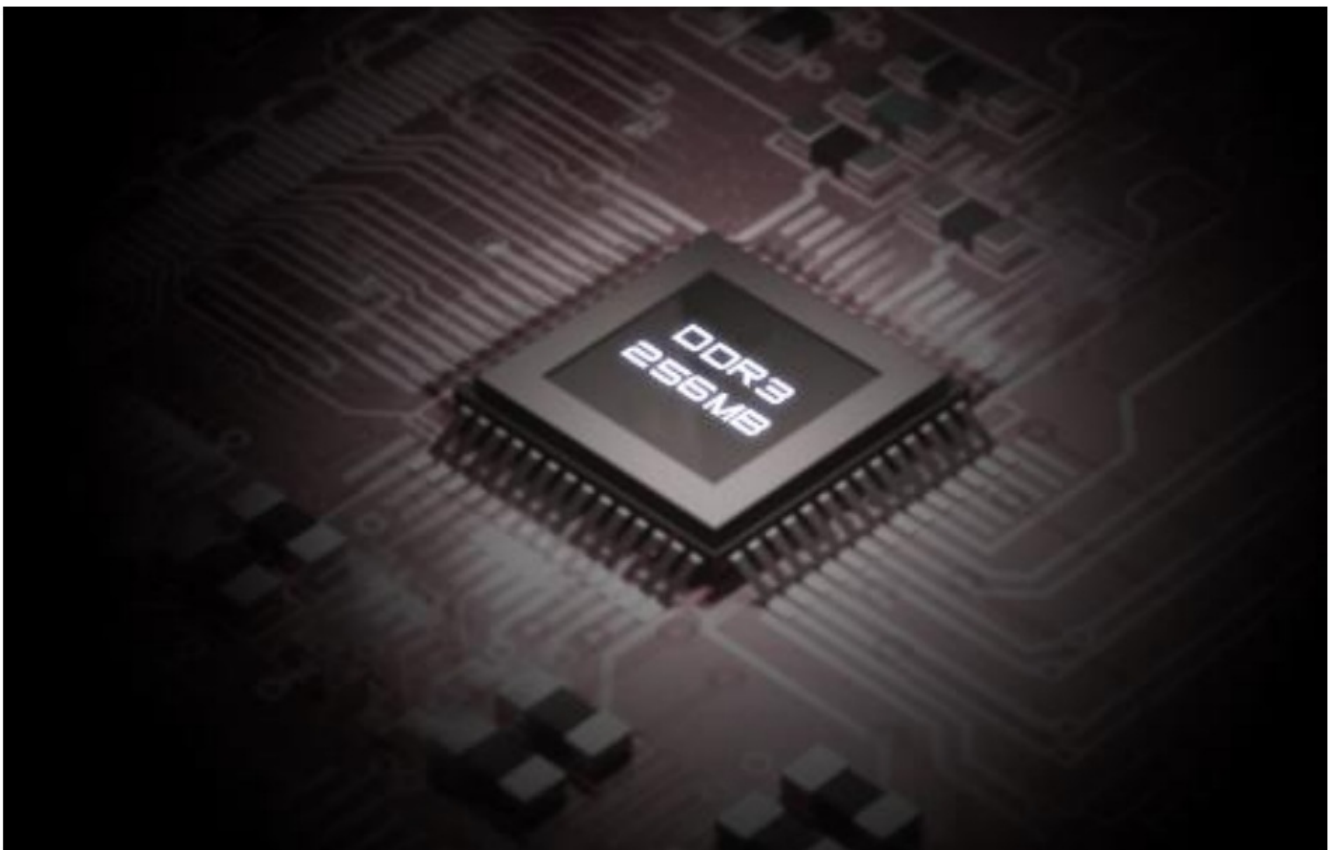

## DPS technology

The planetary cameras from Player One Astronomy have DPS (Dead Pixel Suppression) technology. The DPS is analyses many dark frames to find out those fixed abnormal pixel and record the map in camera memory. In imaging, each exposure frames, those position of dead pixels will be given a median value according to the active pixels around that abnormal pixel.




### Overvoltage and overcurrent protection mechanism

Player One cameras produced by the number one player ensures the safety of your camera and other equipment through overvoltage and overcurrent protection mechanisms.


### Data Port

When the camera is connected to the USB3.0 interface and full-resolution preview is used, it can reach 109FPS in 12bit (RAW16) and 126FPS 10bit(RAW8) mode. When recording images, since the actual writing speed will be affected by the writing speed of the hard disk itself, when the hard disk writing speed is slow, the recording may not reach the theoretical speed. It is recommended that you use a high-quality solid state drive to record data to give full play to the performance of the camera. Use the ST4 guide cable to connect the camera and the AUTO GUIDE port of the equatorial mount to do guiding.

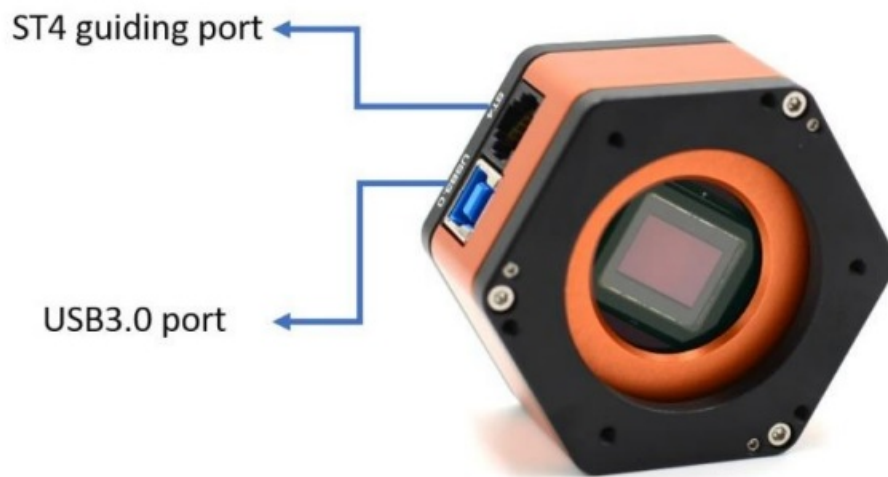



### Performance

### System Gain

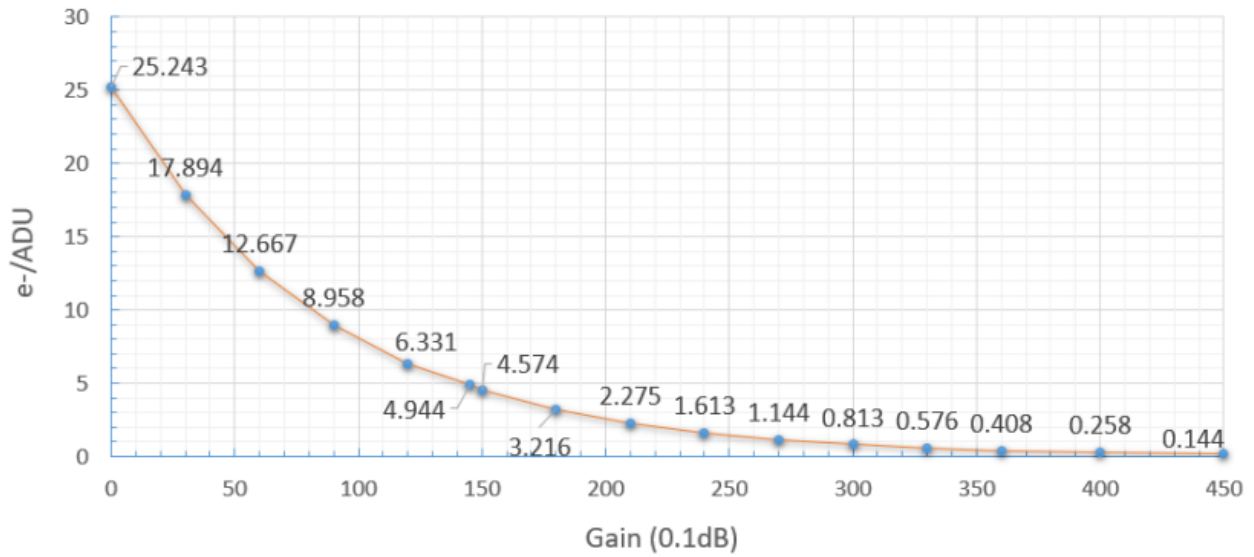

### Readout Noise

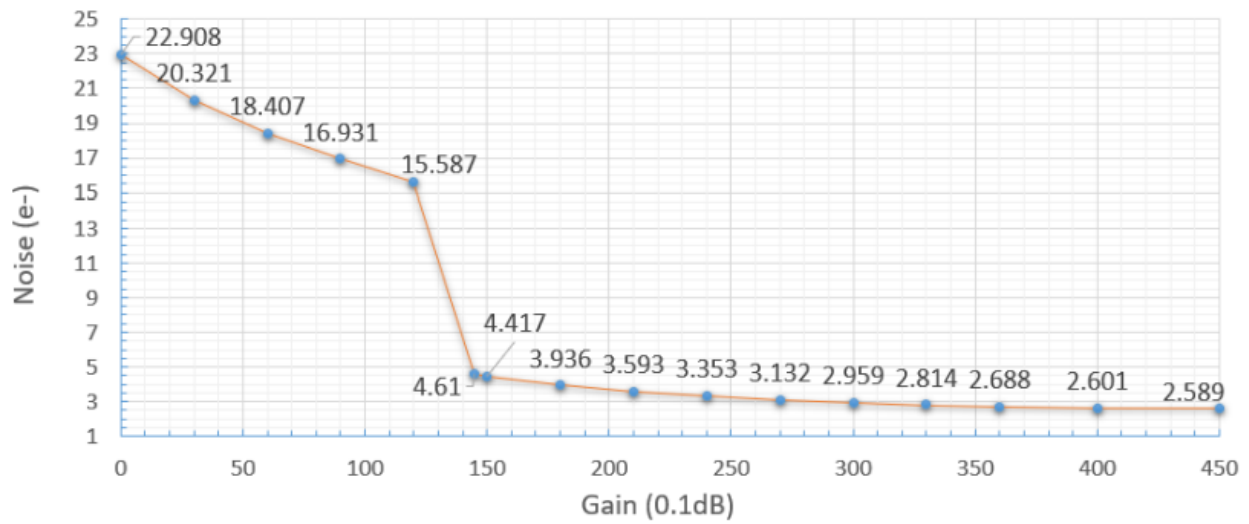

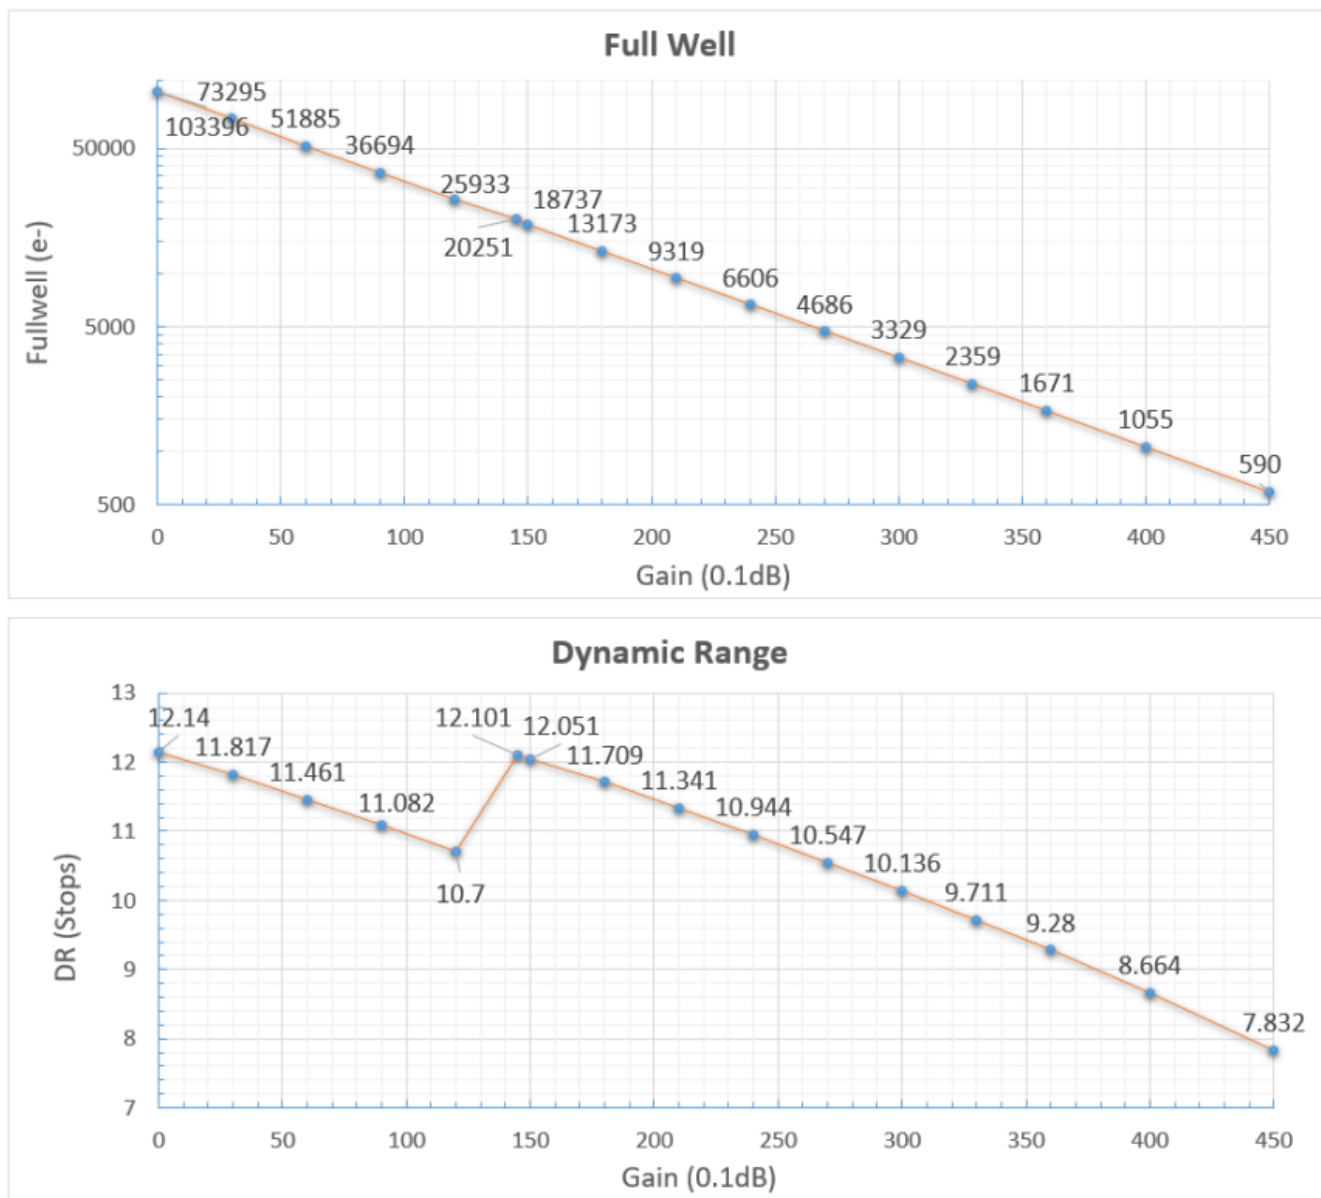

## Readout Noise


Regarding readout noise, we solemnly promise that all values are obtained from actual tests. And for users, you could use Sharpcap 4 for testing. SC4 has a function called Sensor Analysis, provide a very simple way to test readout noise. We wrote a tutorial on our

- website: <https://player-one-astronomy.com/service/manuals/>

After many rigorous readout noise tests, this camera can reach a low readout noise of 2.6e at a gain of 380. If you are interested in readout noise testing, you may try it yourself, which is very simple.

## QE Curve

## IMX432 QE Curve



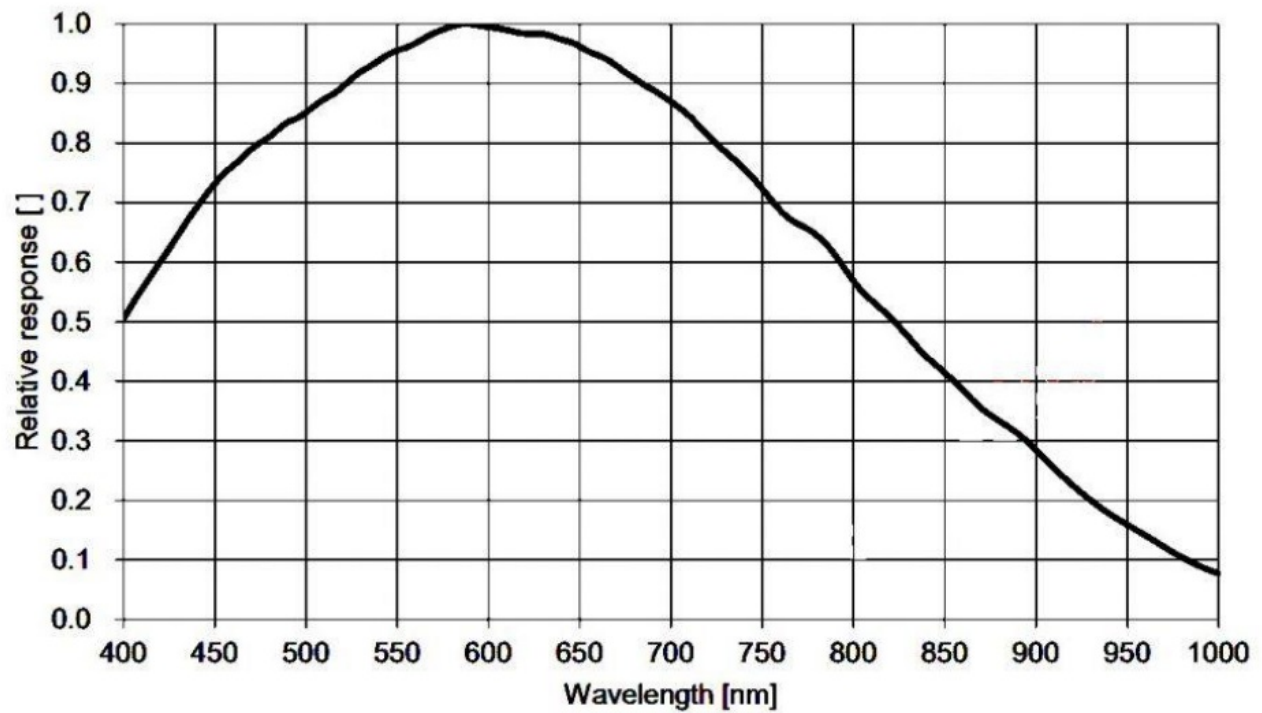


### HCG Mode

The Apollo-M MAX camera has a unique HCG mode, which will automatically turn on when the camera gain setting is >145. The HCG mode can greatly reduce the readout noise and retain the same high dynamic range as the low gain.



## Mechanical Drawing

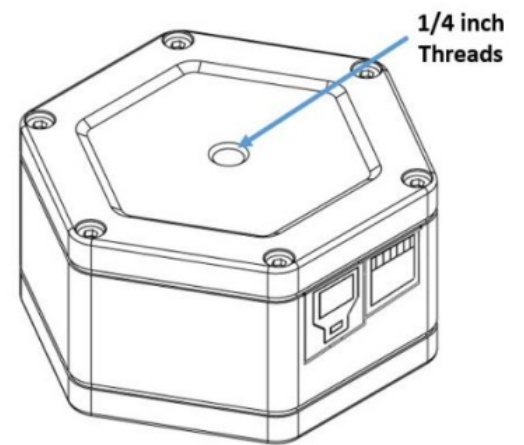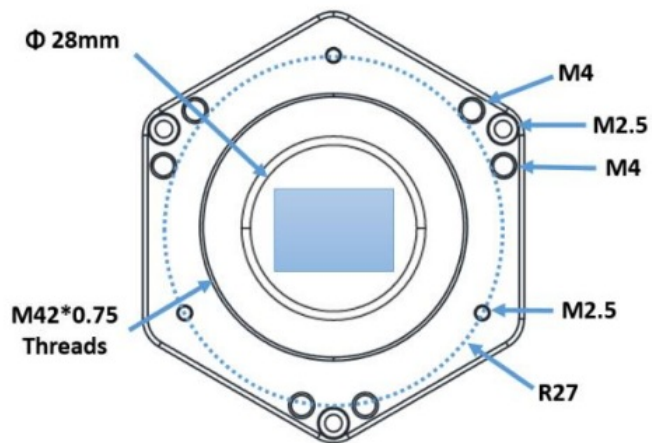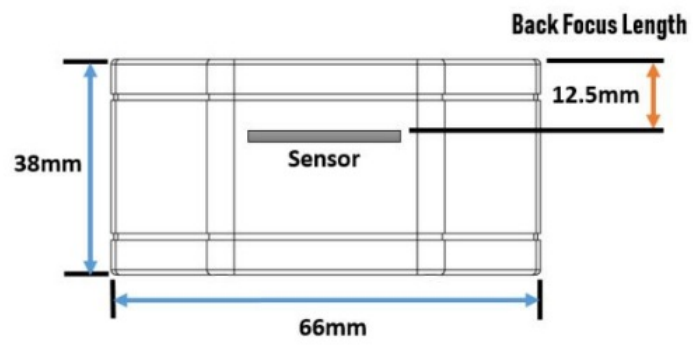

## Package List



# Camera Package



<b>1</b> 	<b>2</b> 	<b>3</b> 
Camera and T-mount	USB3.0 Cable	ST4 Cable
<b>4</b> 	<b>5</b> 	<b>6</b> 
M2 Hexagonal wrench	1.25" Cover	Air Blower

## Warranty & Shipping Policy

### Payment method

We provide PayPal and PayPal checkout on our website.

### Shipping and Delivery

Shipping Fee:

- Amount  $\geq$  299USD: free express shipping
- Amount  $<$  299USD: 29.9USD for express shipping

### Shipping Services:

- We usually use DHL, UPS, FedEx, TNT for shipping.

- Make sure your email is correct, we maybe will contact with you through emails in case of emergency.

If the customer wants to designate a shipping company or has special requirement, please send an email to [support@player-one-astronomy.com](mailto:support@player-one-astronomy.com) and tell us your detailed requirements.

### **Shipping time:**

- Usually 7-14 days.
- A tracking number will be updated in 3 days after payment.

For orders from areas where transportation is not easy, such as islands, towns in mountainous regions, delivery time will be slightly longer.

Please send an email to [support@player-one-astronomy.com](mailto:support@player-one-astronomy.com) immediately, if the following occurs:

- Shipping is delayed or has some abnormal information.
- The packing is badly damaged on arrival, take pictures and do not sign.

### **Tax**

- The price on our website without tax.
- Please note that buyers are liable to charge tax involved, such as Import tax, VAT, customs handling fee, etc.
- Those fees possibly will be collected at the time of delivery by courier.

For best experience, we recommend customers to purchase our products from local dealers.

### **After-sales Service**

#### **Warranty Policy**

2-year free warranty (time start from delivery) for Player One products. If the product has any issues, please send the image or video and description to [support@player-one-astronomy.com](mailto:support@player-one-astronomy.com) for further check to confirmation.

- Purchase from Player One official online store, we will provide warranty service directly.
- Purchase form dealer, we will provide warranty service throughthe dealer.

Repair in warranty, customer only pay the shipping fee of shipping back the product to us or dealer, and no other extra fees.

#### **Replacement Policy**

You can request our Replacement Service: ✓ Within 30 calendar days of receiving the product if the product does not match the original description of the product in one or more significant respects. ✓ Within 30 calendar days of receiving the product if the product suffers performance failure.

Please contact our After-Sales team by email to [support@player-one-astronomy.com](mailto:support@player-one-astronomy.com) within 30 calendar days of receiving the products. Player One shall be responsible for the two-way replacement freight for any products sent in for replacement due to performance faults.

## Warranty and Replacement Policy Exceptions:


- Warranty service time or replacement service time expired.
- Legal proof-of-purchase, receipts, or invoices are not provided or are reasonably believed to have been forged or tampered with.
- A product sent to Player One for replacement does not include all original accessories, attachments and packaging, or contains items damaged by user error.
- A product is found to have no defects after all appropriate tests are conducted by Player One.
- Any fault or damage of the product is caused by unauthorized use or modification of the product, including exposure to moisture, entry of foreign bodies (water, oil, sand, etc.) or improper installation or operation.
- Product labels or serial numbers show signs of tampering or alteration.
- Damage is caused by uncontrollable external factors, including falling down, fires, floods, or lightning strikes, etc.
- Proof of damage during transit issued by the carrier cannot be provided.
- Other circumstances stated in this policy.

In those situations, repair the product might have extra cost, we will estimate cost and email the customer to know the information before send the product back.

## FAQ

- **Q: Can the Apollo-M MAX camera be used for planetary imaging?**
  - A: The Apollo-M MAX camera is primarily designed for solar photography, but it can also be used for capturing planetary images with suitable accessories and settings.
- **Q: What is the advantage of the global shutter feature in this camera?**
  - A: The global shutter in the Apollo-M MAX camera eliminates motion blur, making it ideal for capturing crisp images of fast-moving objects like the sun or space stations.
- **Q: How can I prevent banding issues in my solar images?**
  - A: The Apollo-M MAX camera is designed to minimize banding issues commonly seen in solar imaging, providing smooth images without distracting horizontal banding.

## Documents / Resources

	<p><a href="#">Player One Apollo-M MAX Apollo Camera</a> [pdf] User Manual Apollo-M MAX Apollo Camera, Apollo-M MAX, Apollo Camera, Camera</p>
---	--

## References

- **A** [Astronomy Magazine: Space News, Observing, Planets, Galaxies](#)
-  [Software – Player One Astronomy](#)
-  [Active Cooling System \(ACS\) for uncooled cameras – Player One Astronomy](#)

-  [Software – Player One Astronomy](#)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.