



PLT 6050 Selectable LED Panel Troffer Hybrid Fixture Instructions

[Home](#) » [PLT](#) » [PLT 6050 Selectable LED Panel Troffer Hybrid Fixture Instructions](#) 



Color and Wattage Selectable LED Panel/Troffer Hybrid Fixture

Contents

- [1 DESCRIPTION](#)
- [2 INSTALLATION](#)
- [3 APPLICATIONS](#)
- [4 PERFORMANCE SUMMARY](#)
- [5 SELECTABLE TABLE](#)
- [6 DIMENSIONS](#)
- [7 Documents / Resources](#)
 - [7.1 References](#)

DESCRIPTION

Create a modern look in your space by installing these back-lit LED panel/troffer hybrids. These color and wattage selectable fixtures combine the aesthetic of troffers with the low cost and spatial flexibility of panels.

FEATURES

- Efficiently replaces up to a 3 lamp fluorescent fixture
- Dimmable with 0-10V dimmers; see Compatible Dimmers section for full list of compatible dimmers
- Light output varies depending on wattage and color temperature selected; see Selectable Table for full breakdown

- Wattage and color temperature is selectable via switches on the driver box; see installation instruction for more information

LISTINGS

- UL rated for damp locations
- IP20
- DesignLights Consortium® 5.1 Standard – meets the requirements for the highest DLC qualification for efficacy and lumen maintenance

PERFORMANCE

- CRI: 80
- CCT: 3500K, 4000K, and 5000K
- LED L70 Life Hours @ 25°C: 100,000 hours

THERMAL

- -4°F to 122°F (-20°C to 50°C) operating temperature

ELECTRICAL

- THD: <20%
- Power Factor: 0.9
- Input Voltage: 120-277V
- Dimmable power supply (0-10V)
- Surge Protection: 2kV

INSTALLATION

- Designed for recessed installation to a T-grid ceiling; see installation instructions for more information

CONSTRUCTION

- Cold-rolled steel and extruded aluminum housing with white finish
- Frosted polystyrene lens protects LEDs while evenly distributing light

WARRANTY

- 5 year limited warranty; see [pltsolutions.com](https://www.pltsolutions.com) for warranty details

project name	type
catalog number	
comments	voltage
approved by	date



APPLICATIONS

- Conference Rooms
- Retail
- Offices
- Hospitality
- Healthcare
- Schools
- Reception Areas
- Corridors
- Foyer

PERFORMANCE SUMMARY

Item #	Size	Watts*	CCT*	CRI	Dimming	Voltage	Replaces	DLC #	DLC Level
PLT-90318	1×4	25/ 30/ 35	3500K/ 4000K/ 5000K	80	0-10V	120-277V	2 Lamp Fluorescent	PLTM5B3211	5.1 Standard
PLT-90319	2×2	25/ 30/ 35	3500K/ 4000K/ 5000K	80	0-10V	120-277V	2 Lamp Fluorescent	PLTM5B2111	5.1 Standard
PLT-90320	2×4	30/ 40/ 50	3500K/ 4000K/ 5000K	80	0-10V	120-277V	2-3 Lamp Fluorescent	PLTM5B3211	5.1 Standard

*See Selectable Table for full breakdown

SELECTABLE TABLE

Item #	Wattage	CCT	Lumen	Efficacy
PLT-90318	25	3500K	2900	116
		4000K	2925	117
		5000K	2950	118
	30	3500K	3390	116
		4000K	3420	114
		5000K	3450	115
	35	3500K	3850	110
		4000K	3885	111
		5000K	3920	112
PLT-90319	25	3500K	2900	116
		4000K	2925	117
		5000K	2950	118
	30	3500K	3390	113
		4000K	3420	114
		5000K	3450	115
		3500K	3850	110

	35	4000K	3885	111
		5000K	3920	112
PLT-90320	30	3500K	3480	119
		4000K	3510	117
		5000K	3540	118
	40	3500K	4520	113
		4000K	4560	114
		5000K	4600	115
	50	3500K	5500	110
		4000K	5550	111
		5000K	5600	112


COMPATIBLE DIMMERS

BRAND	Model	Dim to Off Voltage
LUTRON	NTSTV-DV	0.527V
LUTRON	NFTV	0.515V
LUTRON	DVTV	0.765V
LEVITON	IP710	0.609V
LEVITON	DS710	0.578V
LEGRAND	RH4FBL3PW	0.568V

DIMENSIONS


1X4 DIMENSIONS

- Length: 47.8"
- Height: 1.8"
- Width: 11.9"

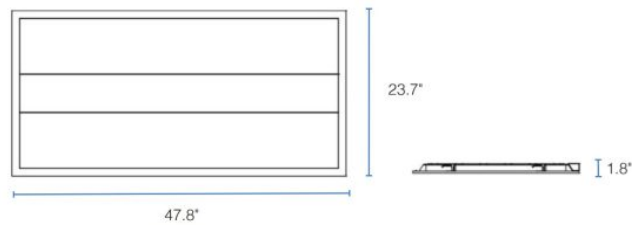


2X2 DIMENSIONS

- Length: 23.7"
- Height: 1.8"
- Width: 23.7"

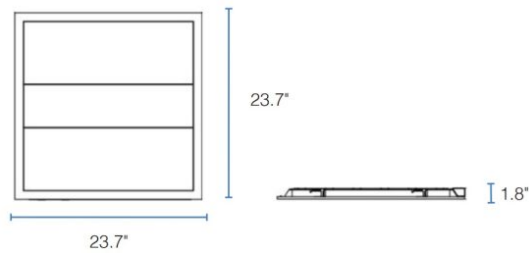

2X4 DIMENSIONS

- Length: 47.8"
- Height: 1.8"
- Width: 23.7"

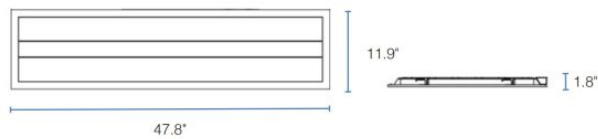

[972-535-0926](tel:972-535-0926)
PLTSOLUTIONS.COM
 ver 101524

Documents / Resources

	PLT 6050 Selectable LED Panel Troffer Hybrid Fixture [pdf] Instructions 6050 Selectable LED Panel Troffer Hybrid Fixture, 6050, Selectable LED Panel Troffer Hybrid Fixture, Panel Troffer Hybrid Fixture, Troffer Hybrid Fixture, Hybrid Fixture, Fixture
--	--

References

- PLT

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.