



## PNW Components Range Pedal Installation Guide

[Home](#) » [PNW Components](#) » PNW Components Range Pedal Installation Guide 



### Contents

- [1 TOOL NEEDED](#)
- [2 PACKAGE INCLUDES](#)
- [3 RANGE PEDALINSTALL](#)
- [4 Documents / Resources](#)
- [5 Related Posts](#)


### TOOL NEEDED

- 8MM ALLEN WRENCHES
- NM TORQUE WRENCH
- ALL-PURPOSE BICYCLE GREASE
- TOOLS REQUIRED TO REMOVE YOUR OLD PEDALS, IF APPLICABLE (CHECK WITH MANUFACTURER)

**WARNING:** DO NOT DRILL INTO OR MODIFY THE RANGE PEDAL IN ANY WAY. DOING SO WILL VOID THE WARRANTY. MODIFICATION OF THE RANGE PEDAL IN ANY WAY MAY RESULT IN PEDAL FAILURE WHICH MAY RESULT IN SERIOUS INJURY OR DEATH.

### PACKAGE INCLUDES


- (2) RANGE PEDALS
- (2) PEDAL WASHERS

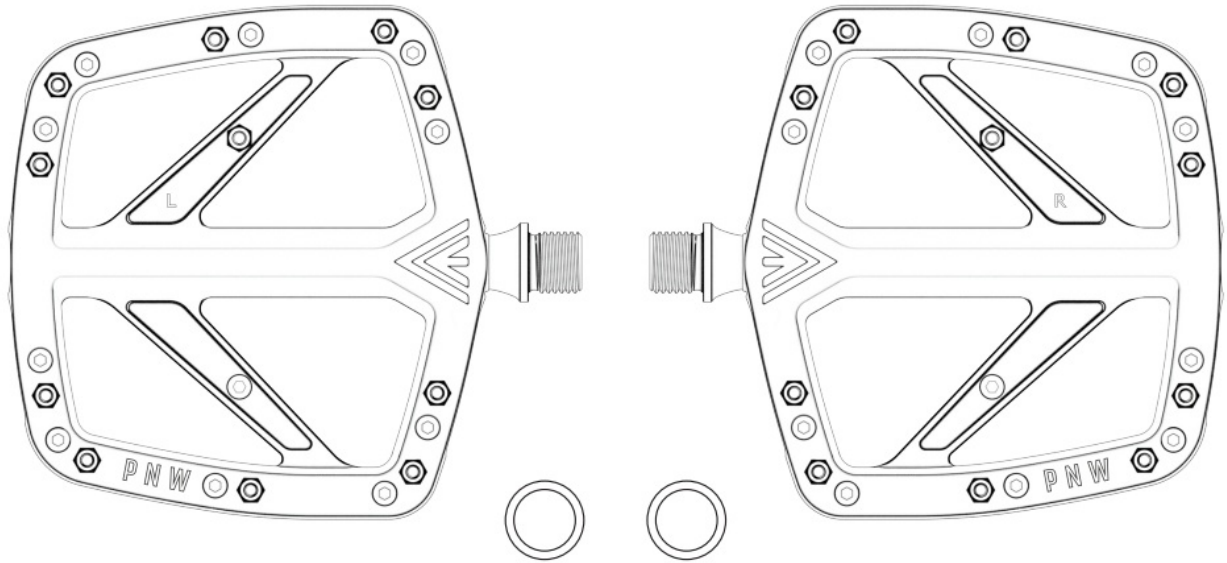

## RANGE PEDALINSTALL

### STEP 1

SLIDE A PEDAL WASHER ONTO THE AXLE OF EACH PEDAL.

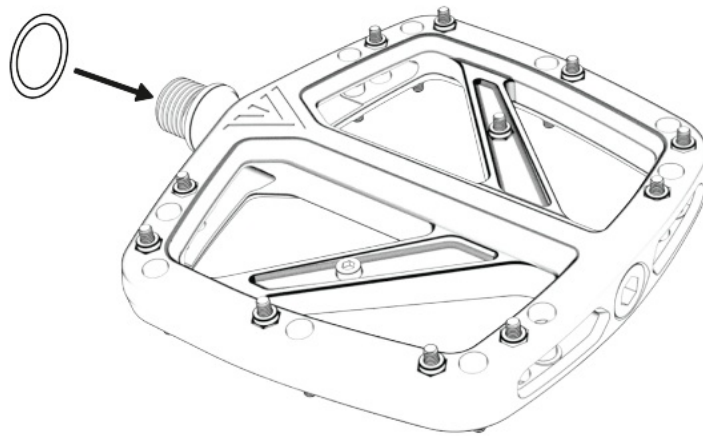


**CONT'D...**

### STEP 2

GREASE THE THREADS OF THE AXLE OF EACH PEDAL.


### STEP 3

THE RANGE PEDALS ARE SPECIFIC TO THE RIGHT (DRIVE SIDE) AND LEFT (NON-DRIVE SIDE) OF THE BIKE. TO DETERMINE WHICH PEDAL IS WHICH, LOCATE THE "R" OR "L" ON EACH PEDAL BY FINDING THE CORRESPONDING "R" OR "L" MOLDED INTO THE CROSSBAR OF THE PEDAL PLATFORM.

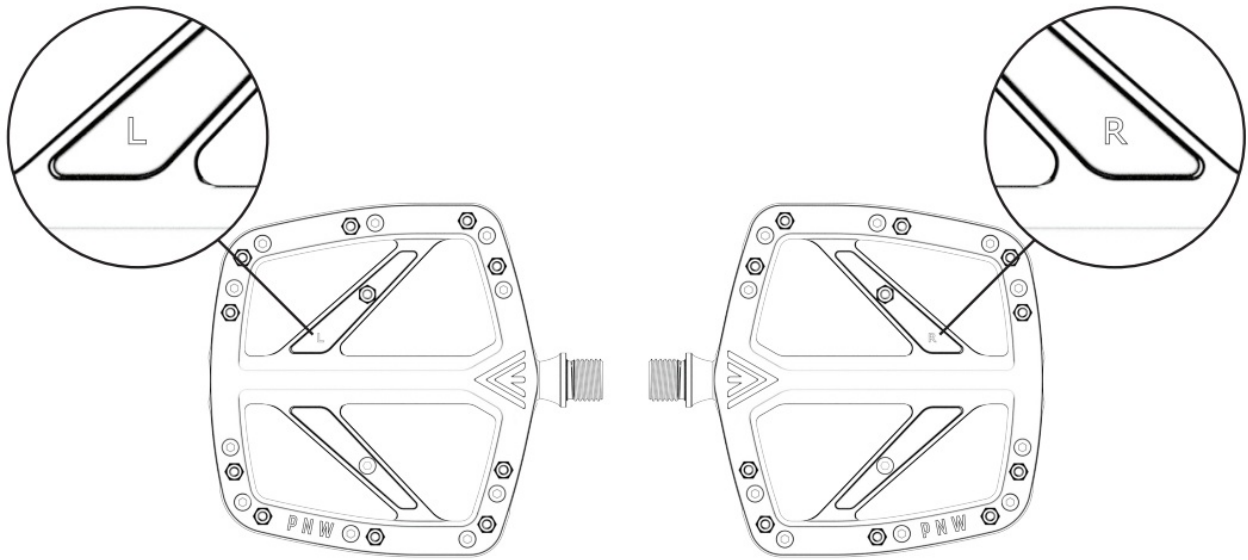

#### STEP 4

TO INSTALL THE RIGHT (R) PEDAL, START BY THREADING THE PEDAL AXLE CLOCKWISE (TURNING TO THE RIGHT) INTO THE DRIVE-SIDE CRANK ARM. NEXT, INSERT YOUR 8MM ALLEN WRENCH THROUGH THE BACKSIDE OF THE DRIVE-SIDE CRANK ARM AND CONTINUE TURNING THE AXLE CLOCKWISE UNTIL THE PEDAL AXLE IS FULLY SEATED IN THE CRANK ARM. LASTLY, USING YOUR TORQUE WRENCH, TIGHTEN THE AXLE TO 35NM.

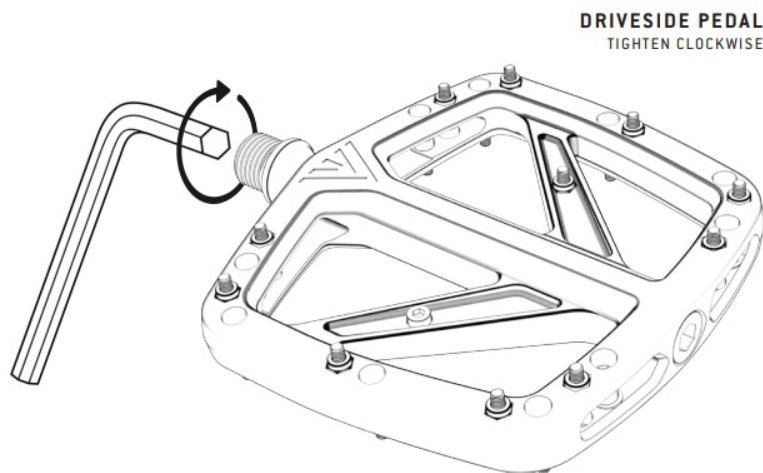


**CONT'D...**


#### STEP 5

TO INSTALL THE LEFT (L) PEDAL, START BY THREADING THE PEDAL AXLE COUNTERCLOCKWISE (TURNING TO THE LEFT) INTO THE NON-DRIVE SIDE CRANK ARM. NEXT, INSERT YOUR 8MM ALLEN WRENCH THROUGH THE BACKSIDE OF THE NON-DRIVE SIDE CRANK ARM AND CONTINUE TURNING THE AXLE COUNTERCLOCKWISE UNTIL THE PEDAL AXLE IS FULLY SEATED IN THE CRANK ARM. LASTLY, USE YOUR TORQUE WRENCH, AND TIGHTEN THE AXLE TO 35 NM.

**NON-DRIVESIDE PEDAL**  
TIGHTEN COUNTERCLOCKWISE

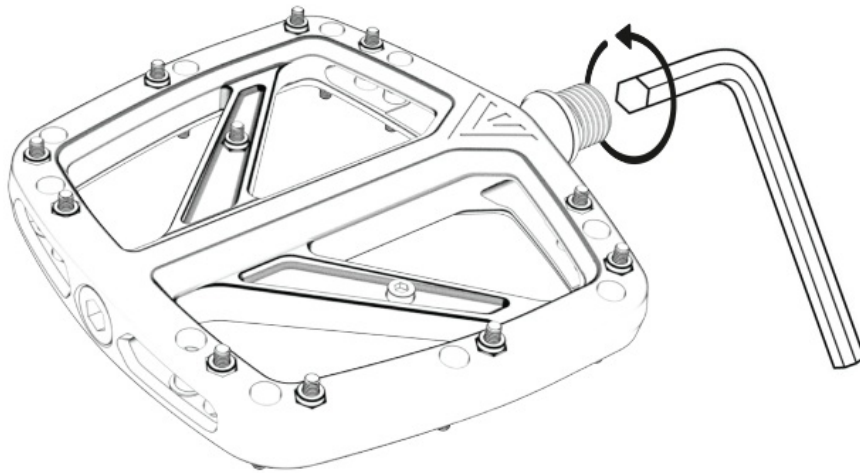

## Documents / Resources



[PNW Components Range Pedal](#) [pdf] Installation Guide  
Range Pedal, Range Composite Pedals