



POLAR CT330 Top Loading Bottle Cooler Instruction Manual

[Home](#) » [Polar](#) » POLAR CT330 Top Loading Bottle Cooler Instruction Manual 



**Top Loading Bottle Cooler
Instruction manual**



**Model
CT330 / CT331 / CT332**

Contents

- 1 Safety Tips
- 2 Product Description
- 3 Introduction
- 4 Pack Contents
- 5 Installation
- 6 Operation
- 7 Cleaning, Care & Maintenance
- 8 Troubleshooting
- 9 Technical Specifications
- 10 Electrical Wiring
- 11 Disposal
- 12 Compliance
- 13 DECLARATION OF CONFORMITY
- 14 Documents / Resources
 - 14.1 References
- 15 Related Posts

Safety Tips

- Position on a flat, stable surface.
- A service agent/qualified technician should carry out installation and any repairs if required. Do not remove any components or service panels on this product.
- Consult Local and National Standards to comply with the following:
 - Health and Safety at Work Legislation
 - BS EN Codes of Practice
 - Fire Precautions
 - IEE Wiring Regulations
 - Building Regulations
- DO NOT use jet/pressure washers to clean the appliance.
- DO NOT use the appliance outside.
- DO NOT use this appliance to store medical supplies.
- DO NOT stand or support yourself on the base, drawers, or doors.
- DO NOT allow oil or fat to come into contact with the plastic components or door seal. Clean immediately if contact occurs.
- Bottles that contain a high percentage of alcohol must be sealed and placed vertically in the refrigerator.
- Always carry, store and handle the appliance in a vertical position and move by holding the base of the appliance.
- Always switch off and disconnect the power supply to the unit before cleaning.
- Keep all packaging away from children. Dispose of the packaging in accordance with the regulations of local authorities.
- If the power cord is damaged, it must be replaced by a POLAR agent or a recommended qualified technician in order to avoid a hazard.
- This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience or knowledge unless they have been given supervision or instruction

concerning the use of the appliance by a person responsible for their safety.

- POLAR recommends that this appliance should be periodically tested (at least annually) by a Competent Person. Testing should include, but not be limited to Visual Inspection, Polarity Test, Earth Continuity, Insulation Continuity, and Functional Testing.
- POLAR recommends that this product be connected to a circuit protected by an appropriate RCD (Residual Current Device).

Caution Risk of Fire

- Do not store explosive substances such as aerosol cans with a flammable propellant in this appliance.



Warning: Keep all ventilation openings clear of obstruction. The unit should not be boxed in without adequate ventilation.

- **Warning:** Do not use mechanical devices or other means to accelerate the defrosting process, other than those recommended by the manufacturer.
- **Warning:** Do not damage the refrigerant circuit.
- **Warning:** Do not use electrical appliances inside the food storage compartments of the appliance, unless they are the type recommended by the manufacturer.

Product Description

CT330 – Polar Top loading Bottle cooler – 935mm Width
CT331 – Polar Top loading Bottle cooler – 1255mm Width
CT332 – Polar Top loading Bottle cooler – 1634mm Width

Introduction

Please take a few moments to carefully read through this manual. Correct maintenance and operation of this machine will provide the best possible performance from your POLAR product.

Pack Contents

The following is included:

- POLAR Refrigerator
- Instruction Manual

POLAR prides itself on quality and service, ensuring that at the time of packaging the contents are supplied fully functional and free of damage.

Should you find any damage as a result of transit, please contact your POLAR dealer immediately.

Installation



Note: If the unit has not been stored or moved in an upright position, let it stand upright for approximately 12 hours before the operation. If in doubt allow standing.

1. Remove the appliance from the packaging.

Make sure that all protective plastic film and coatings are thoroughly removed from all surfaces.

2. Maintain a distance of 20cm (7 inches) between the unit and walls or other objects for ventilation. **NEVER LOCATE NEXT TO OR NEAR A HEAT SOURCE.**




Note: Before using the appliance for the first time, clean the interior with soapy water.

3. Level the appliance by adjusting the screw feet.

Operation

Control Panel

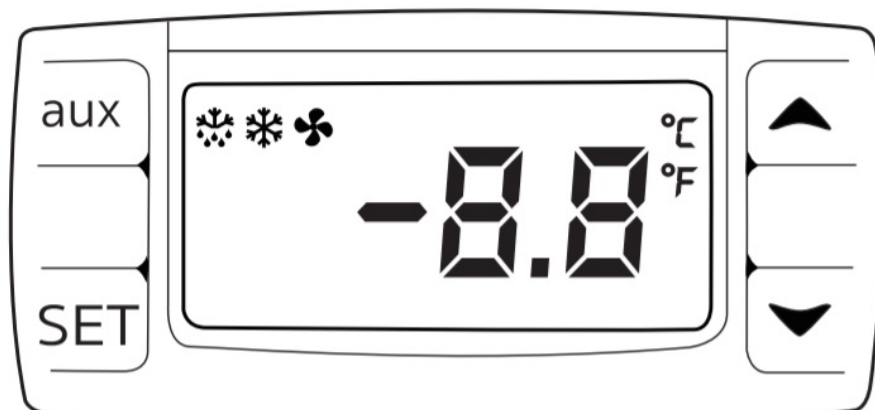

Set the Operating Temperature

1. Hold the SET button for 3 seconds. The value of the current setpoint will be displayed.
2. Press the ▲ or ▼ buttons to display the required temperature.
3. Press the SET button to store the temperature.

Manual Defrost

Press and hold the defrost button "aux" for 2 seconds to begin a manual defrost. The defrost light illuminates.

Cleaning, Care & Maintenance



Switch off and disconnect from the power supply before cleaning.

- Clean the interior of the appliance as often as possible.
- Do not use abrasive cleaning agents. These can leave harmful residues.
- Clean the door seal with warm soapy water.
- Always wipe dry after cleaning.
- Do not allow water used in cleaning to run through the drain hole into the evaporation pan.
- Take care when cleaning the rear of the appliance. Sharp edges can be cut.
- A POLAR agent or qualified technician must carry out repairs if required.

Cleaning the Condenser

- Periodically cleaning the condenser can extend the life of the appliance.

- POLAR recommend that a POLAR agent or qualified technician clean the condenser.

Troubleshooting

If your POLAR appliance develops a fault, please check the following table before making a call to the Helpline or your POLAR dealer.

Fault	Probable Cause	Solution
The appliance is not working	The unit is not switched on	Check the unit is plugged in correctly and switched on
	Plug and lead are damaged	Call POLAR agent or qualified Technician
	Fuse in the plug has blown	Replace the fuse
	Power supply	Check power supply
	Internal wiring fault	Call POLAR agent or qualified Technician
The appliance turns on, but the temperature is too high/low	Too much ice on the evaporator	Defrost the appliance
	Condenser blocked with dust	Call POLAR agent or qualified Technician
	Doors are not shut properly	Check doors are shut and seals are not damaged
	The appliance is located near a heat source or airflow to the condenser is being interrupted	Move the refrigerator to a more suitable location
	Ambient temperature is too high	Increase ventilation or move the appliance to a cooler position

	Unsuitable foodstuffs are being stored in the appliance	Remove any excessive hot foodstuffs or blockages to the fan
	Appliance is overloaded	Reduce the amount of food stored in the appliance
The appliance is leaking water	The appliance is not properly leveled	Adjust the screw feet to level the appliance (if applicable)
	The discharge outlet is blocked	Clear the discharge outlet
	The movement of water to the drain is obstructed	Clear the floor of the appliance (if applicable)
	The water container is damaged	Call POLAR agent or qualified Technician
	The drip tray is overflowing	Empty the drip tray (if applicable)
The appliance is unusually loud	Loose nut/screw	Check and tighten all nuts and screws
	The appliance has not been installed in a level or stable position	Check installation position and change if necessary

Technical Specifications

Model	Voltage	Power	Current	Temperature Range	Refrigerant	Dimensions H x W x D mm	Weight (kg)
CT330	230V 50Hz	160W	1.4A	2°C " 8°C	R600a 55g	888 x 935 x 687	52.5
CT331	230V 50Hz	250W	1.4A	2°C,- 8°C	R600a 60g	888 x 1255 x 687	67
CT332	230V 50Hz	250W	1.4A	2°C,,, 8°C	R600a 60g	888 x 1634 x 687	78

Electrical Wiring

POLAR appliances are supplied with a 3 pin BS1363 plug and lead The plug is to be connected to a suitable mains socket.
POLAR appliances are wired as follows:

- Live wire (colored brown) to the terminal marked L
- Neutral wire (colored blue) to terminal marked N
- Earth wire (colored green/yellow) to terminal marked E



This appliance must be earthed.
If in doubt consult a qualified electrician.
Electrical isolation points must be kept clear of any obstructions. In the event of any emergency, disconnection is required they must be readily accessible.

Disposal

EU regulations require refrigeration products to be disposed of by specialist companies who remove or recycle all gasses, metal, and plastic components.
Consult your local waste collection authority regarding the disposal of your appliance. Local authorities are not obliged to dispose of commercial refrigeration equipment but may be able to offer advice on how to dispose of the equipment locally.
Alternatively, call the POLAR helpline for details of national disposal companies within the EU.

Compliance

	The WEEE logo on this product or its documentation indicates that the product must not be disposed of as household waste. To help prevent possible harm to human health and/or the environment , the product must be disposed of in an approved and environmentally safe recycling process. For further information on how to dispose of this product correctly, contact the product supplier, or the local authority responsible for waste disposal in your area.
	POLAR parts have undergone strict product testing in order to comply with regulatory standards and specifications set by international, independent, and federal authorities. POLAR products have been approved to carry the following symbol:

All rights reserved. No part of these instructions may be produced or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of POLAR.
Every effort is made to ensure all details are correct at the time of going to press, however, POLAR reserves the right to change specifications without notice.

DECLARATION OF CONFORMITY

- Conformiteitsverklaring

Equipment Type		Model
G-Series Top loading Bottle cooler – 935mm Width G-Series Top loading Bottle cooler – 1255mm Width G-Series Top loading Bottle cooler – 1634 mm Width		CT330 (& -E -A) CT331 (& -E -A) CT332 (& -E -A)
Application of Territory Legislation & Council Directives(s) Toepassing van Europese Richtlijn(en)	Machinery Directive 2006/42/EC EN 60335-1:2012 +A11:2014 +A13:2017 EN 60335-2-89:2010 +A1:2016 +A2:2017 EN 62233:2008 Electro-Magnetic Compatibility (EMC) Directive 2014/30/EU – recast of 2004/108/EC EN 55014-1:2017 EN 55014-2:2015 EN 61000-3-2: 2014 EN 61000-3-3: 2013 Restriction of Hazardous Substances Directive (RoHS) 2015/863 amending Annex II to Directive 2011/65/EU	Electrical Safety IEC 60335-1:2010 +A1:2013 +A2:2015 IEC 60335-2-89:2010 +A1:2012 +A2:2016 Electromagnetic Compatibility EN 55014-1:2017 EN 55014-2:2015 EN 61000-3-2: 2014 EN 61000-3-3: 2013
Producer Name		Polar

I, the undersigned, hereby declare that the equipment specified above conforms to the above Territory Legislation, Directive(s) and Standard(s).

Date	3rd December 2020		
Signature			
Full Name	Ashley Hooper	Eoghan Donnellan	Josie Holt
Position	Technical & Quality Manager	Commercial Manager/ Importer	Commercial Manager/ Responsible Supplier
Producer Address	Fourth Way, Avonmouth, Bristol, BS11 8TB United Kingdom	42 North Point Business Park New Mallow Road Cork Ireland	15 Bagdally Road, Campbelltown NSW 2560



UK	+44 (0)845 146 2887
Eire	
NL	040 — 2628080
FR	01 60 34 28 80
BE-NL	0800-29129
BE-FR	0800-29229
DE	0800 — 1860806
IT	N/A
ES	901-100 133
PT	vendas@nisbets.pt




<http://www.polar-refrigerator.com/> 

CT330-CT332_ML_A5_v2_20201208
2020/12/8 17:36



Documents / Resources

	<p>POLAR CT330 Top Loading Bottle Cooler [pdf] Instruction Manual CT330, CT331, CT332, Top Loading Bottle Cooler</p>
--	--

References

- [P Polar Refrigeration - Commercial Refrigeration](#)