



POTTER SHX-52-SHX-52S Durable Speaker-Speaker Strobe Owner's Manual

[Home](#) » [POTTER](#) » POTTER SHX-52-SHX-52S Durable Speaker-Speaker Strobe Owner's Manual 



SHX-52-SHX-52S Durable Speaker-Speaker Strobe Owner's Manual




**SHX-52/SHX-52S
DURABLE SPEAKER/
SPEAKER STROBE**

- 1 SHX-52-SHX-52S Durable Speaker-Speaker Strobe
- 2 Documents / Resources
 - 2.1 References
- 3 Related Posts

- Self-Contained Indoor/Outdoor Speaker/Speaker Strobe
- Sturdy aluminum back plate
- Strong Polycarbonate housing
- Dual tamper protection
- Frequency response range: 500-5000 Hz
- Up-front screw terminals for easy field wiring in square back box
- Mounts directly to the wall or four inch quarter backbox.
- Available strobe lens colors: Amber, Blue, Clear, Red

External Dimensions: inch (mm)

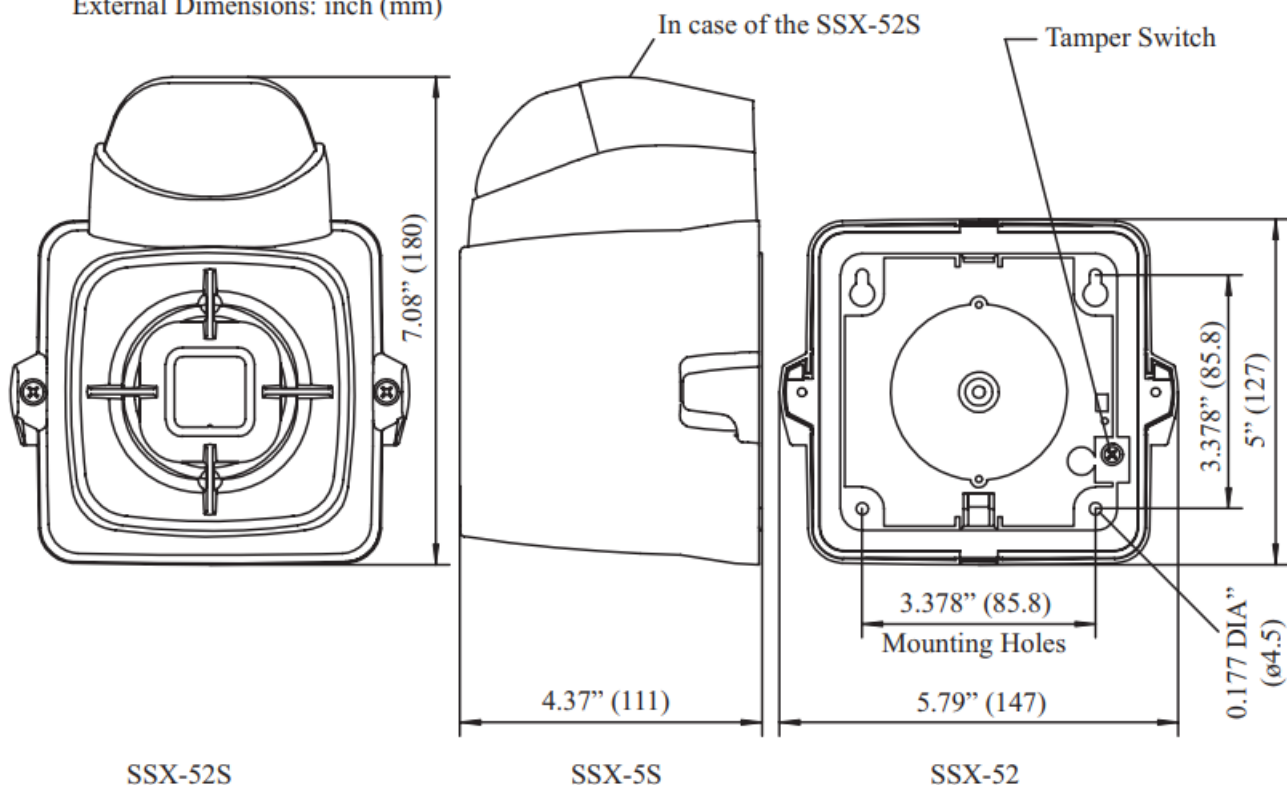


Model Number	Power Input	Tamper Contact Capacity	Strobe Specifications				Speaker Specifications			Operating Temperature Range
			Lens Color	Rated Voltage	Rated Current	Flash Rate	Sound Output	Impedence	Frequency Range	
SHX-52	15 watts	0.3A @12V DC	-	-	-	-	97dBA	8 Ohms	500-5000Hz	-4°F - 140°F -20°C - 60°C
SHX-52SA			Amber	12V DC	180 mA	60-100 times/min.				
SHX-52SB			Blue							
SHX-52SC			Clear							
SHX-52SR			Red							



Potter Electric Signal Co., LLC
 St. Louis, MO
 Cust Service: 866-240-1870
 Tech Support:866-956-1211
 Canada 888-882-1833
www.pottersignal.com
 PRINTED IN USA
 MKT. #8850068 – REV B-1
firealarmresources.com

Documents / Resources

	<p>POTTER SHX-52-SHX-52S Durable Speaker-Speaker Strobe [pdf] Owner's Manual SHX-52-SHX-52S Durable Speaker-Speaker Strobe, SHX-52-SHX-52S, Durable Speaker-Speaker Strobe, Speaker-Speaker Strobe, Speaker Strobe, Strobe</p>
---	--

References

- 🔥 [Fire Alarm Resources | Download fire alarm documents](#)
- Ⓜ️ [Potter Electric: Fire Alarms & Fire Sprinkler Systems](#)